

Switchmode/High Frequency Toroidal Inductor

FIT50-7

Description:

The FIT50-7 toroidal inductor is specifically designed to minimize transients. It stores energy and therefore, conditions the output signal by leveling the current waveform providing a more stable current supply. Generally used in high frequency circuits, its standard design provides an economical solution in differential mode applications or as an output inductor.

Electrical Specifications (@25C):

Min. Induc	tance (µH)	Rated	Max	
No Bias	No Bias At Bias		DCR (mΩ)	
8.86	4.80	8.1	11.0	

Note: No Bias inductance measured at .25V, 10KHZ.

Dimensions:

Α	В	С	D	E	F	G
.700 Max	.475 Max	.750 Max	.300 Ref	.237 Max	.092187	.040±.003

Units: In inches

Weight: .012 lbs.


Technical Notes:

- 1. Nominal inductance values are typically 10% higher than minimal rating.
- 2. Biased inductance measured at rated DC amps.
- 3. Operation at rated current yields approximately 40°C temperature rise over 20°C ambient.

RoHS Compliance: As of manufacturing date February 2005, all standard products meet the requirements of 2002/95/EC, known as the RoHS initiative.

* Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics' website for the most current version.



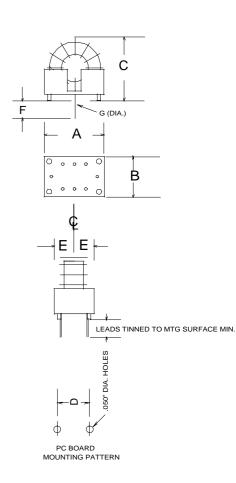

Web: www.TriadMagnetics.com Phone 951-277-0757 Fax 951-277-2757 22520B Temescal Canyon Road Corona, California 92883

Release Date: October 21, 2005

Revision: A