

SAC-4P-M12MS/ 1,5-PUR SH

Order No.: 1682715

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1682715>Sensor/actuator cable, 4-pos., PUR halogen-free black, shielded,
straight M12 plug on free conductor end, cable length: 1.5 m**Commercial data**

| | |
|--------------------------|-------------------|
| EAN | 4017918168995 |
| Pack | 1 Pcs. |
| Customs tariff | 85444290 |
| Weight/Piece | 0.0855 KG |
| Catalog page information | Page 73 (PC-2007) |

Product notesWEEE/RoHS-compliant since:
11/17/2006

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data**General data**

| | |
|-----------------------|----------------------------|
| Nominal current I_N | 4 A |
| Nominal voltage U_N | 250 V |
| Number of positions | 4 |
| Volume resistance | $\leq 5 \text{ m}\Omega$ |
| Insulation resistance | $\geq 100 \text{ M}\Omega$ |

| | |
|---------------------------------|--|
| Length of cable | 1.5 m |
| Ambient temperature (operation) | -25 °C ... 90 °C (plug/socket) |
| | -25 °C ... 80 °C (cable, fixed installation) |
| | -5 °C ... 80 °C (cable, flexible installation) |

General characteristics

| | |
|------------------------------------|---|
| Coding | A - standard |
| Inflammability class acc. to UL 94 | HB |
| Surge voltage category | II |
| Pollution degree | 3 |
| Degree of protection | IP65/IP67/IP69K |
| Contact material | CuSn |
| Contact surface material | Ni/Au |
| Contact carrier material | TPU GF |
| Material of grip body | TPU, hardly inflammable, self-extinguishing |
| Material, knurls | Zinc die-cast, (nickel-plated) |
| Sealing material | NBR |
| Status display | No |

Conductor data

| | |
|----------------------------------|---|
| Cable type | PUR halogen-free black shielded |
| Cable abbreviation | Li9Y-V1-C-V1-11Y |
| Conductor cross section | 0.34 mm ² |
| AWG signal line | 22 |
| Conductor structure, signal line | 42x 0.10 mm |
| Thickness, insulation | ≥ 0.21 mm (Core insulation) |
| | Approx. 1 mm (Outer cable sheath) |
| External cable diameter | 5.90 mm |
| External sheath, color | Black-gray RAL 7021 |
| Insulation resistance | ≥ 100 GΩ*km |
| Overall twist | 4 wires, twisted |
| Shielding | Braided shielding made of tin-plated copper wires |
| Optical shield covering | 85 % |
| Outer sheath, material | PUR |
| Conductor material | Bare Cu litz wires |
| Cable weight | 47 kg/km |

| | |
|---|---------|
| Smallest bending radius, fixed installation | 59 mm |
| Smallest bending radius, movable installation | 59 mm |
| Max. bending cycles | 4000000 |
| Bending radius | 50 mm |
| Traversing path | 10 m |
| Traversing rate | 3 m/s |

Certificates / Approvals

Approval logo




requested approbations

| | |
|---------------|-----------------------------|
| Certification | CUL Listed, GOST, UL Listed |
|---------------|-----------------------------|

Drawings

Diagram

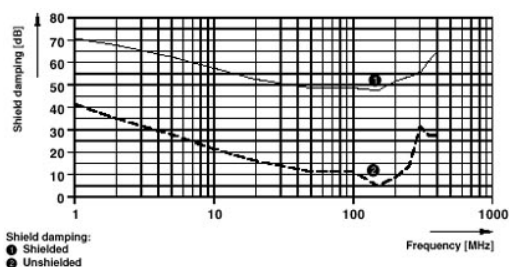


Dimensioned drawing




M12 x 1 male connector, straight, shielded

Circuit diagram

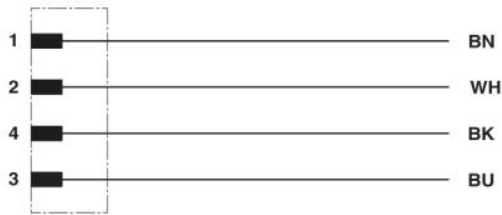

Contact assignment of the M12 plug

Schematic diagram

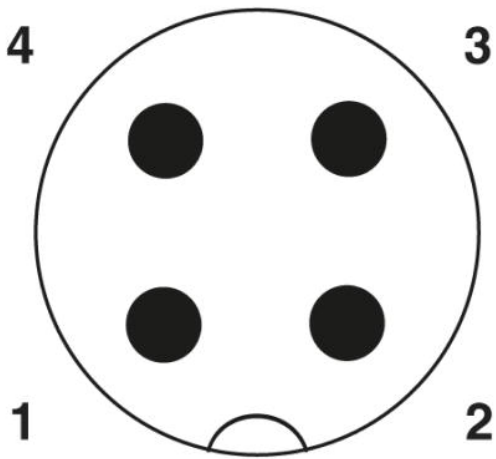

Pin assignment M12 plug, 4-pos., A-coded, view plug side

Address

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 00
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2008 Phoenix Contact
Technical modifications reserved;