



DR124 Series Low Profile Power Inductors

Description

- 125°C maximum total temperature operation
- Low profile surface mount inductor
- 12.3mm x 12.3mm x 4.5mm shielded drum core
- Ferrite core material
- Inductance range from 0.47µH to 1000µH
- Current range from 24.4 Amps to 0.44 Amps
- Frequency range up to 1MHz


Applications

- Notebook power, LCD panels
- Computer, DVD players, and portable power devices
- DC-DC converters
- Buck, boost, forward, and resonant converters
- Noise filtering and filter chokes

Environmental Data

- Storage temperature range: -40°C to +125°C
- Operating temperature range: -40°C to +125°C (range is application specific)
- Solder reflow temperature: +260°C max. for 10 seconds maximum





Packaging

Supplied in tape and reel packaging, 750 per reel

Part Number	Rated Inductance (µH)	OCL (1) μH±20%	Irms(2) Amperes	Isat (3) Amperes	DCR (Ω) mΩ @20°C (Typical)	DCR (Ω) mΩ @20°C (Maximum)	K-factor (4)
DR124-R47-R	0.47	0.42	16.0	24.40	2.2	2.7	17.51
DR124-1R0-R	1.0	0.83	13.9	18.00	3.00	3.6	12.50
DR124-1R5-R	1.5	1.37	11.1	14.00	4.75	5.7	9.73
DR124-2R2-R	2.2	2.04	9.1	11.45	5.92	7.1	7.96
DR124-3R9-R	3.9	3.80	7.0	8.40	12.50	15.0	5.84
DR124-4R7-R	4.7	4.88	6.5	7.65	13.50	16.2	5.15
DR124-6R8-R	6.8	6.10	5.6	6.47	18.06	21.7	4.61
DR124-8R2-R	8.2	7.45	5.2	6.22	21.67	26.0	4.17
DR124-100-R	10	8.94	4.5	5.80	23.33	28.0	3.81
DR124-120-R	12	11.5	4.1	4.96	31.67	38.0	3.50
DR124-150-R	15	14.2	3.6	4.62	37.30	44.8	3.02
DR124-180-R	18	16.2	3.4	4.32	46.97	56.4	2.82
DR124-220-R	22	20.7	3.2	3.83	53.99	64.8	2.50
DR124-270-R	27	25.7	2.8	3.44	66.67	80.0	2.24
DR124-330-R	33	31.2	2.6	3.12	80.83	97.0	2.04
DR124-390-R	39	37.3	2.3	2.85	110.00	132.0	1.86
DR124-470-R	47	44.0	2.2	2.63	124.66	149.6	1.72
DR124-560-R	56	54.9	2.0	2.35	144.32	173.2	1.54
DR124-680-R	68	67.1	1.8	2.13	183.33	220.0	1.39
DR124-820-R	82	80.5	1.7	1.94	212.72	255.3	1.27
DR124-101-R	100	95.1	1.5	1.79	256.67	308.0	1.17
DR124-121-R	120	111	1.3	1.65	311.18	373.4	1.08
DR124-151-R	150	146	1.3	1.44	371.02	445.2	0.94
DR124-181-R	180	179	1.1	1.30	501.66	602.0	0.87
DR124-221-R	220	216	1.0	1.15	558.00	669.6	0.77
DR124-271-R	270	256	0.88	1.09	725.00	870.0	0.71
DR124-331-R	330	327	0.83	0.92	825.00	990.0	0.63
DR124-471-R	470	460	0.68	0.74	1242.50	1491.0	0.53
DR124-681-R	680	669	0.56	0.65	1845.83	2215.0	0.45
DR124-821-R	820	825	0.53	0.62	2109.17	2351.0	0.40
DR124-102-R	1000	998	0.44	0.53	2898.00	3477.00	0.37
DR124-102-R (1) Open Circuit Inductar					to determine B p-p for		

- (1) Open Circuit Inductance Test Parameters: 100kHz, 0.25V, 0.0Adc.
 (2) Irms: DC current for an approximate ΔT of 40°C without core loss. Derating is necessary for AC currents. PCB layout, trace thickness and width, air-flow, and proximity of other heat generating components will affect the temperature rise. It is recommended that the temperature of the part not exceed 125°C under worst case operating conditions verified in the end application.
- (3) Isat Amperes peak for approximately 25% rolloff (@25°C)

- (4) K-factor: Used to determine B p-p for core loss (see graph).
 B p-p = K*L*ΔI, B p-p(mT), K: (K factor from table), L: (Inductance in μH), ΔI (Peak to peak ripple current in Amps).


 (5) Part Number Definition: DR124-xxx-R
- (5) Part Number Definition: DH124-xxx-H DR124 = Product code and size; -xxx = Inductance value in uH; R = decimal point; If no R is present, third character = # of zeros. -R suffix = RoHS compliant






DR124 Series Low Profile Power Inductors

Mechanical Diagrams

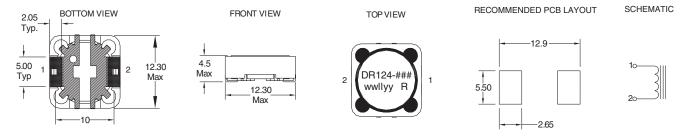


Dimensions are in millimeters.

wwlly = Date code, R = Revision level.

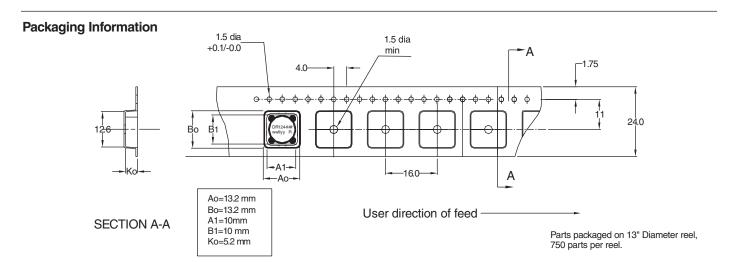

Core Loss

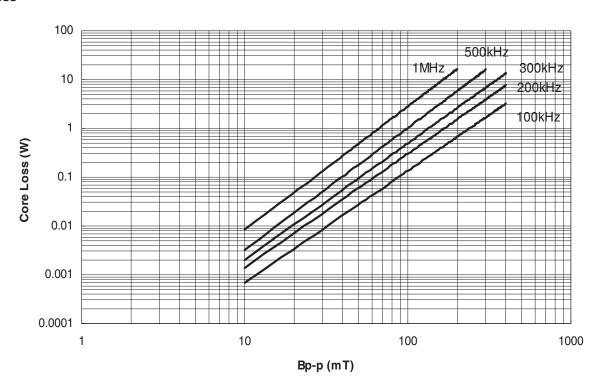




Temperature Rise vs. Loss



Inductance Characteristics

OCL Vs. Isat

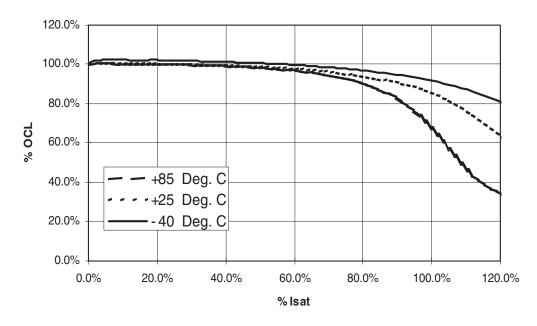



PM-4141 3/07

Visit us on the Web at www.cooperbussmann.com

© Cooper Electronic Technologies 2007 1225 Broken Sound Pkwy. Suite F Boca Raton, FL 33487 Tel: +1-561-998-4100 Toll Free: +1-888-414-2645 Fax: +1-561-241-6640

This bulletin is intended to present product design solutions and technical information that will help the end user with design applications. Cooper Electronic Technologies reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Cooper Electronic Technologies also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Life Support Policy: Cooper Electronic Technologies does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.