



# **HCF1305 Series Power Inductors**

## **Description**

- 125°C maximum total temperature operation
- 12.5mm x 12.5mm x 5.0mm ferrite core material package
- Low profile surface mount inductors designed for higher speed switch mode applications requiring low voltage and high current
- Design utilizes ferrite core with high DC bias resistance and low core loss
- Inductance range from 0.47μH to 4.7μH
- Current range from 36.0 Amps to 10.4 Amps
- Frequency range 100kHz to 1MHz


## **Applications**

- Next generation processors
- High current DC-DC converters
- VRM, multi-phase buck regulators
- PC Workstations, Routers, Servers
- Telecom soft switches, Base stations

#### **Environmental Data**

- Storage temperature range: -40°C to +125°C
- Operating temperature range: -40°C to +125°C (range is application specific)
- Solder reflow temperature: +260°C max. for 10 seconds maximum





## **Packaging**

 Supplied in tape and reel packaging, 600 parts per reel

Part Number	Rated Inductance (µH)	OCL (1) μH ± 20%	Irms (2) Amperes	Isat (3) Amperes	Isat2 (4) Amperes	DCR mΩ@20°C (Typical)	DCR mΩ@20°C (Maximum)	K-factor (5)
HCF1305-R47-R	0.47	0.47	32.0	36.0	30.0	0.83	1.00	21
HCF1305-R56-R	0.56	0.56	32.0	30.0	22.5	0.83	1.00	21
HCF1305-1R0-R	1.00	1.00	22.0	24.0	20.0	1.58	1.90	14
HCF1305-1R2-R	1.20	1.20	22.0	20.0	15.0	1.58	1.90	14
HCF1305-1R8-R	1.80	1.80	16.3	18.0	15.0	2.58	3.10	10
HCF1305-2R2-R	2.20	2.20	16.3	15.0	11.2	2.58	3.10	10
HCF1305-3R0-R	3.00	3.00	13.2	14.4	12.0	4.08	4.90	8.3
HCF1305-3R3-R	3.30	3.30	13.2	12.5	9.0	4.08	4.90	8.3
HCF1305-4R0-R	4.00	4.00	10.9	12.0	10.0	6.0	7.2	6.9
HCF1305-4R7-R	4.70	4.70	10.9	10.4	7.5	6.0	7.2	6.9

- 1) OCL: Open Circuit Inductance test parameters: 100kHz, 0.1Vrms, 0.0Adc. OCL@-40°C can be lower than OCL@20°C by 15% max.
- 2) Irms: DC current for an approximate DT of 40°C without core loss. Derating is necessary for AC currents. PCB layout, trace thickness and width, air-flow, and proximity of other heat generating components will affect the temperature rise. It is recommended that the temperature of the part not exceed 125°C under worst case operating conditions verified in the end application.
- 3) Isat1: Amperes Peak for approximately 30% rolloff (@25°C)
- 4) Isat2: Amperes Peak for approximately 30% rolloff (@ 125°C)

5) K-factor: Used to determine B p-p for core loss (see graph). B p-p =  $K^*L^*\Delta I$  B p-p:(mT), K: (K factor from table), L: (Inductance in  $\mu H$ ),  $\Delta I$  (Peak to peak ripple current in Amps).

Part number definition:

HCF1305-XXX-R

HCF1305 = Product code and size


XXX = Inductance value in uH.


R = Decimal point. If no R is present, third character = #of zeros


RECOMMENDED PCBLAYOUT

-R suffix indicates RoHS compliant

### **Mechanical Diagrams**








FRONT VIEW

\: 12.5max	G: 4.00 Ref
3: 12.5max	H: 5.40 Ref.
C: 5.0max	I: 3.00 Ref.
0. 2.00 rof	I: 4.00 Pof

E: 2.40 +/- 0.10 K: 4.00 Ref. F: 6.90 +/- 0.30 L: 3.4 Ref.

**DIMENSION TABLE** 









Dimensions in Millimeters wwllyy=Date code, R=Revision Level





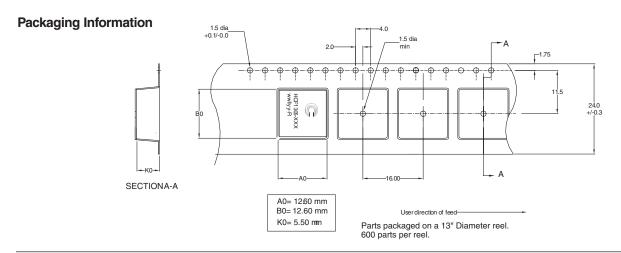

## **Core Loss**

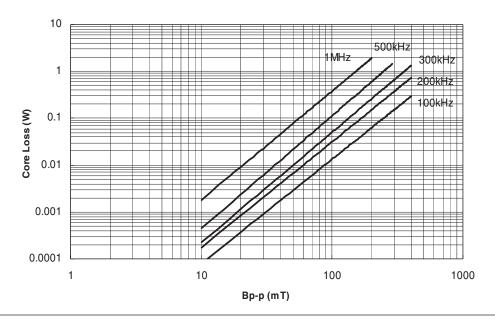

# **Temperature Rise vs. Total Loss**











#### **Inductance Characteristics**

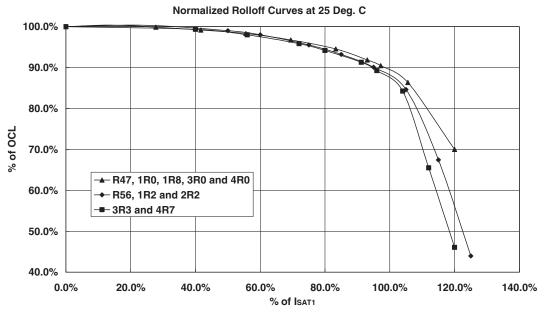

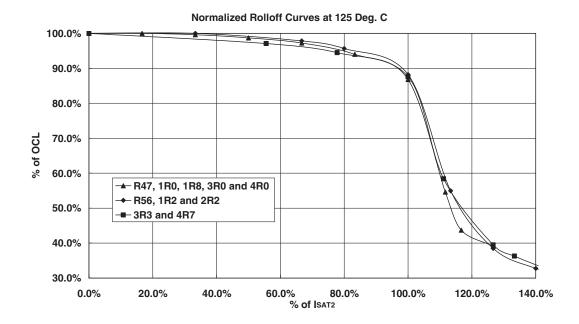



PM-4133 3/07

Visit us on the Web at www.cooperbussmann.com

© Cooper Electronic Technologies 2007 1225 Broken Sound Pkwy. Suite F Boca Raton, FL 33487 Tel: +1-561-998-4100 Toll Free: +1-888-414-2645 Fax: +1-561-241-6640

This bulletin is intended to present product design solutions and technical information that will help the end user with design applications. Cooper Electronic Technologies reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Cooper Electronic Technologies also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Life Support Policy: Cooper Electronic Technologies does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.