


CONFIGURATION:

CN36M		CN36F
1	_____	1
2	_____	2
3	_____	3
4	_____	4
5	_____	5
6	_____	6
7	_____	7
8	_____	8
9	_____	9
10	_____	10
11	_____	11
12	_____	12
13	_____	13
14	_____	14
15	_____	15
16	_____	16
17	_____	17
18	_____	18
19	_____	19
20	_____	20
21	_____	21
22	_____	22
23	_____	23
24	_____	24
25	_____	25
26	_____	26
27	_____	27
28	_____	28
29	_____	29
30	_____	30
31	_____	31
32	_____	32
33	_____	33
34	_____	34
35	_____	35
36	_____	36
SHIELD	_____	SHIELD

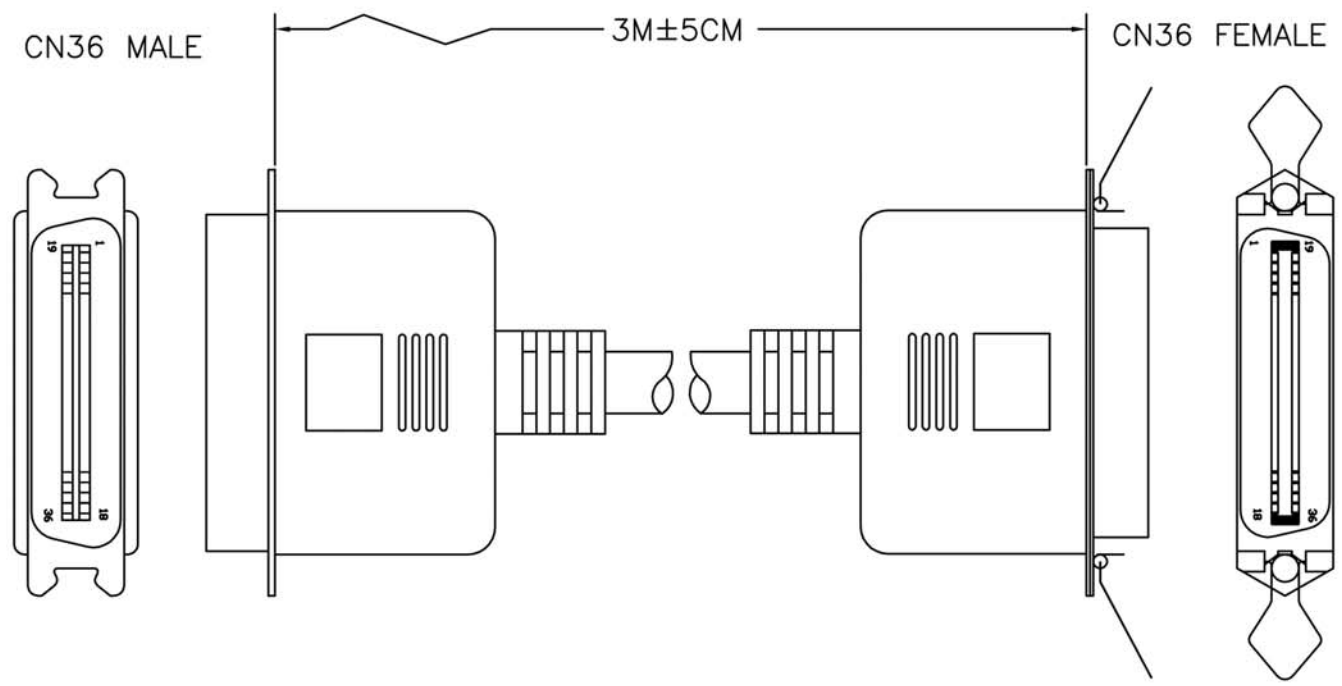

MAT'L:  
 1.CABLE:#28 36C+1+AL/MY(BEIGE PVC JACKET) O.D:9.0MM  
 2.BOTH CONNECTORS WITH NORMAL TYPE  
 3.OUTTER MOLDED WITH BEIGE PVC

NOTE:  
 1.TOTAL LENGTH:3M±5CM  
 2.COLOR:BEIGE  
 3.MOLDED TYPE  
 4.ROHS COMPLIANT



ITEM NO	<b>AK430-3-R (3 Meters)</b>
TITLE	<b>Centronics Printer Cable, CENT 36-Pin Female to CENT 36-Pin Male</b>

**ASSMANN**  
 Electronics, Inc.

1840 W. Drake Drive, Suite 101 - Tempe, AZ 85283  
 Toll Free: 1-877-277-6266 Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED  
 © Copyright 2008 by Assmann Electronic Components  
 All International Rights Reserved