

MMIC Silicon Bipolar Broadband Amplifier

The ISL55015 is a high performance gain block featuring a Darlington configuration using high f_T transistors and excellent thermal performance. They are an ideal choice for DVB-S LNB cable receiver applications.

Other members of the family includes:

ISL55012 and ISL55015 match a 75Ω source to a 50Ω load.
ISL55013 and ISL55014 match a 50Ω source to a 50Ω load.


Ordering Information

| PART NUMBER (Note) | PART MARKING | PACKAGE (Pb-Free) | PKG. DWG. # |
|-----------------------|--------------|----------------------|-------------|
| ISL55015IEZ-T7* | CCK | 6 Ld SC-70 | P6.049A |

*Please refer to TB347 for details on reel specifications.

NOTE: These Intersil Pb-free plastic packaged products employ special Pb-free material sets; molding compounds/die attach materials and 100% matte tin plate PLUS ANNEAL - e3 termination finish, which is RoHS compliant and compatible with both SnPb and Pb-free soldering operations. Intersil Pb-free products are MSL classified at Pb-free peak reflow temperatures that meet or exceed the Pb-free requirements of IPC/JEDEC J STD-020.

Typical Application Circuit

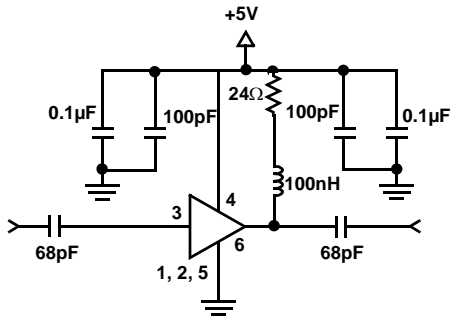


Features

- Input impedance of 75Ω
- Output impedance of 50Ω
- Gain of 13.5dB @1GHz
- Noise figure of 4.8dB @2GHz
- OIP3 of 31dBm @1GHz
- Low input and output return losses
- Pb-free available (RoHS compliant)

Applications

- LNB and LNB-T (HDTV) amplifiers
- IF gain blocks for satellite and terrestrial STBs
- PA driver amplifier
- Wireless data, satellite
- Bluetooth/WiFi
- Satellite locator and signal strength meters

Pinout



ISL55015

Absolute Maximum Ratings (T_A = +25°C)

Supply Voltage from VSP to GND 6V
 Input Voltage V_{S+} +0.3V to GND -0.3V
 Ambient Operating Temperature -40°C to +85°C
 Storage Temperature -65°C to +125°C
 Operating Junction Temperature +135°C
 ESD Rating
 Human Body Model (Per MIL-STD-883 Method 3015.7) . . . 6000V
 Machine Model (Per EIAJ ED-4701 Method C-111) 3000V

Thermal Information

Thermal Resistance (Typical) θ_{JA} (°C/W)
 6 Ld SC-70 200
 Pb-free reflow profile see link below
<http://www.intersil.com/pbfree/Pb-FreeReflow.asp>

CAUTION: Do not operate at or near the maximum ratings listed for extended periods of time. Exposure to such conditions may adversely impact product reliability and result in failures not covered by warranty.


Electrical Specifications V_{SP} = +5V, Z_{RSC} = Z_{LOAD} = 50Ω, T_A = +25°C, 24Ω V_{SP} to OUT, unless otherwise specified.

| PARAMETER | DESCRIPTION | CONDITIONS | MIN (Note 1) | TYP | MAX (Note 1) | UNIT |
|-----------|-------------------------------------|---|--------------|------|--------------|------|
| Vsp | Supply Voltage | To operate below 5V, the 24Ω resistor to supply should be reduced | 3.0 | | 5.5 | V |
| Gt | Small Signal Gain | 1.0GHz | 12.3 | 13.5 | 14.8 | dB |
| | | 1.5GHz | 11.7 | 13.3 | 14.2 | dB |
| | | 2.0GHz | 11 | 12.4 | 13.5 | dB |
| P1dB | Output Power at 1dB Compression | 1.0GHz | 16.3 | 18.1 | 19.8 | dBm |
| | | 2.0GHz | 15.2 | 17.4 | 19.2 | dBm |
| OIP3 | Output Third Order Intercept Point | 1.0GHz | | 31.3 | | dBm |
| | | 2.0GHz | | 28.4 | | dBm |
| OIP2 | Output Second Order Intercept Point | Input tones at 1.0GHz and 1.1GHz, at Input Power = -15dBm, Output tone 2.1GHz | | 47 | | dBm |
| BW | 3dB Bandwidth | 3dB below Gain @ 500MHz | | 2.9 | | GHz |
| IRL | Input Return Loss | 1.0GHz Z _{RSC} = 75Ω, Z _{LOAD} = 50Ω | | 20.2 | | dB |
| ORL | Output Return Loss | 1.0GHz Z _{RSC} = 75Ω, Z _{LOAD} = 50Ω | | 21.4 | | dB |
| RISOL | Reverse Isolation | 2.0GHz | | 18.9 | | dB |
| NF | Noise Figure | 2.0GHz | | 4.8 | | dB |
| ID | Device Operating Current | | 54 | 62.5 | 69 | mA |

NOTE:

1. Parts are 100% tested at +25°C. Over-temperature limits established by characterization and are not production tested.

Device Test Setup

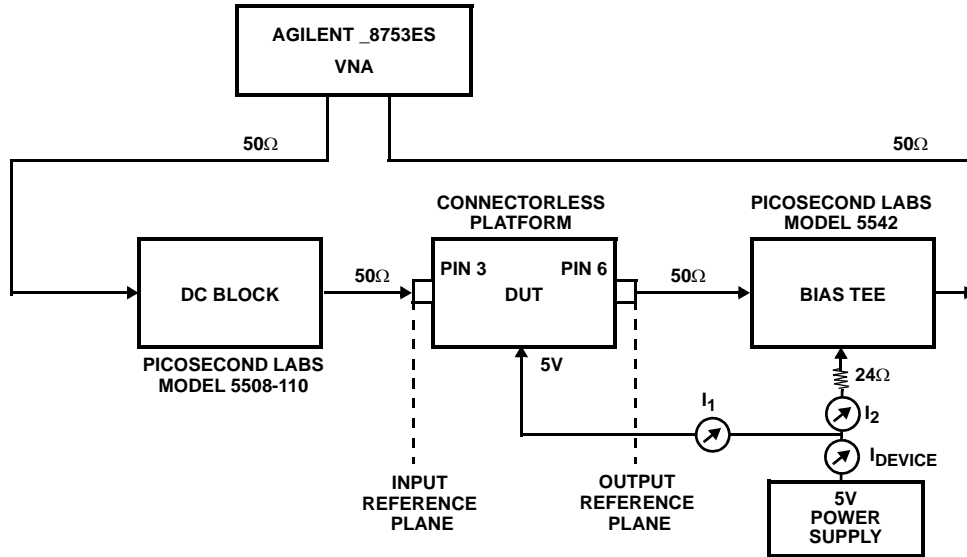

Typical Performance Curves $Z_{RSC} = 75\Omega$, $Z_{LOAD} = 50\Omega$

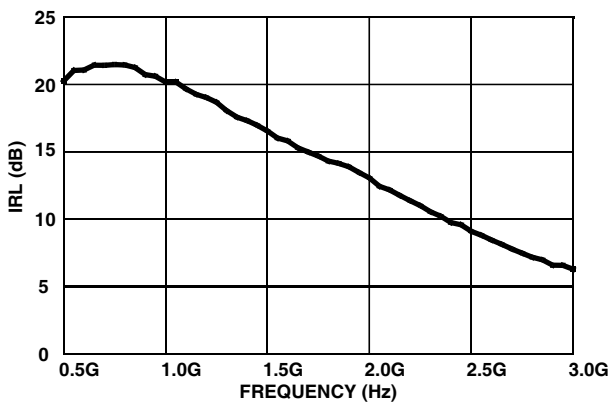


FIGURE 1. INPUT RETURN LOSS vs FREQUENCY

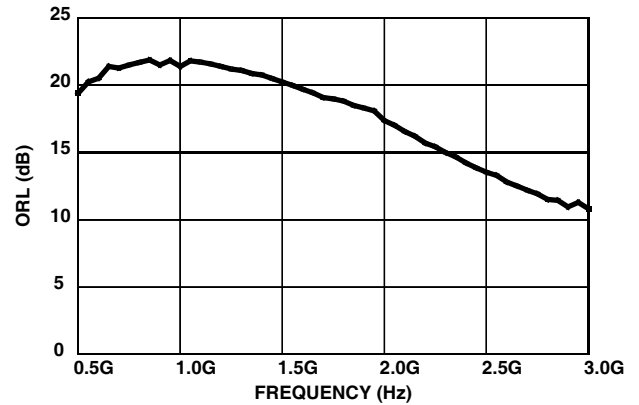


FIGURE 2. OUTPUT RETURN LOSS vs FREQUENCY

Typical Performance Curves 50Ω Environment

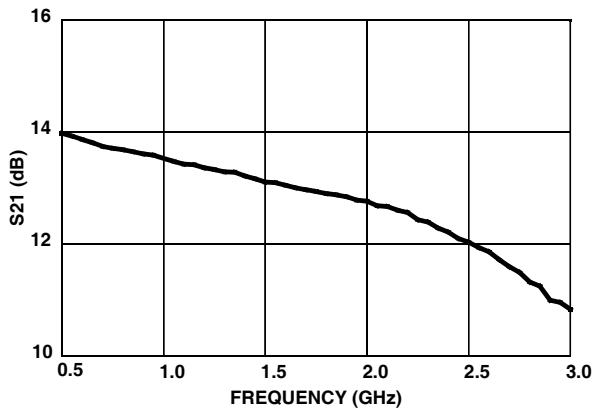


FIGURE 3. |S21| vs FREQUENCY

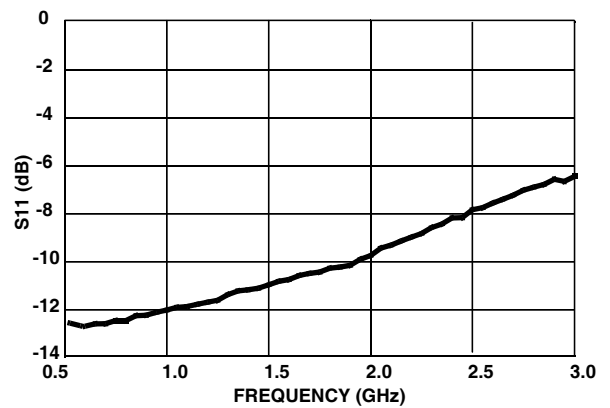


FIGURE 4. |S11| vs FREQUENCY

Typical Performance Curves 50Ω Environment (Continued)

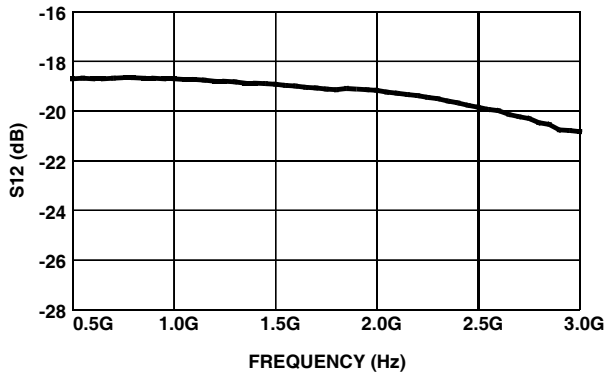


FIGURE 5. |S12| vs FREQUENCY

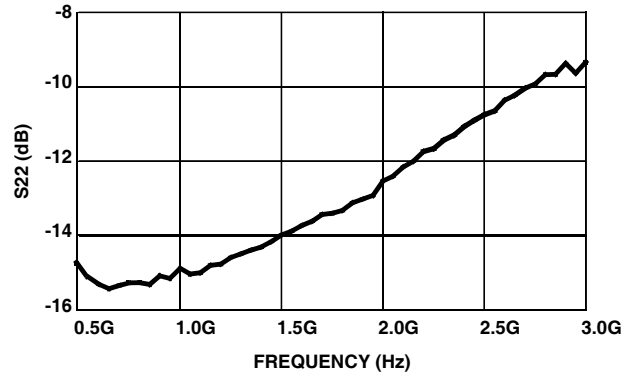


FIGURE 6. |S22| vs FREQUENCY

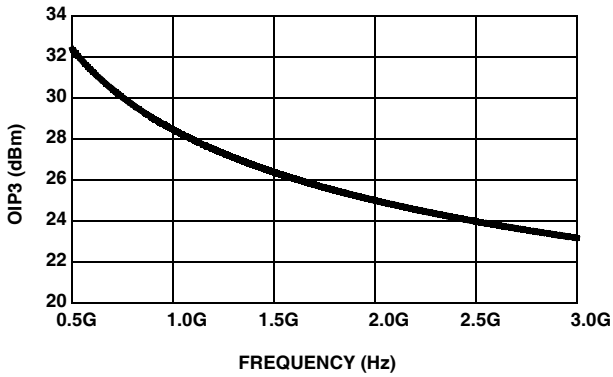


FIGURE 7. OIP3 vs FREQUENCY

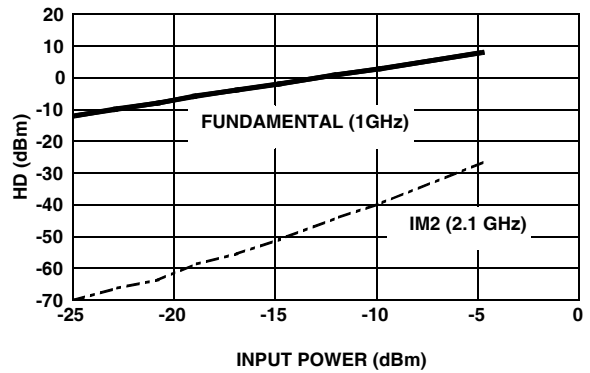


FIGURE 8. IM2 vs INPUT POWER

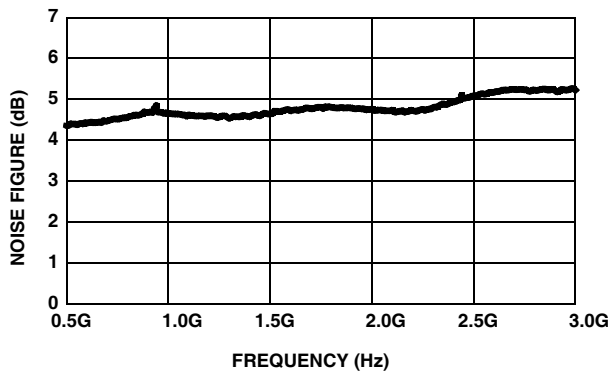


FIGURE 9. NOISE FIGURE vs FREQUENCY

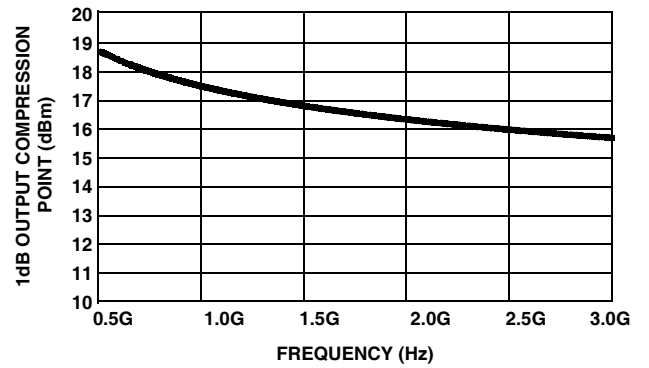


FIGURE 10. P1dB vs FREQUENCY

Typical Performance Curves 50Ω Environment (Continued)


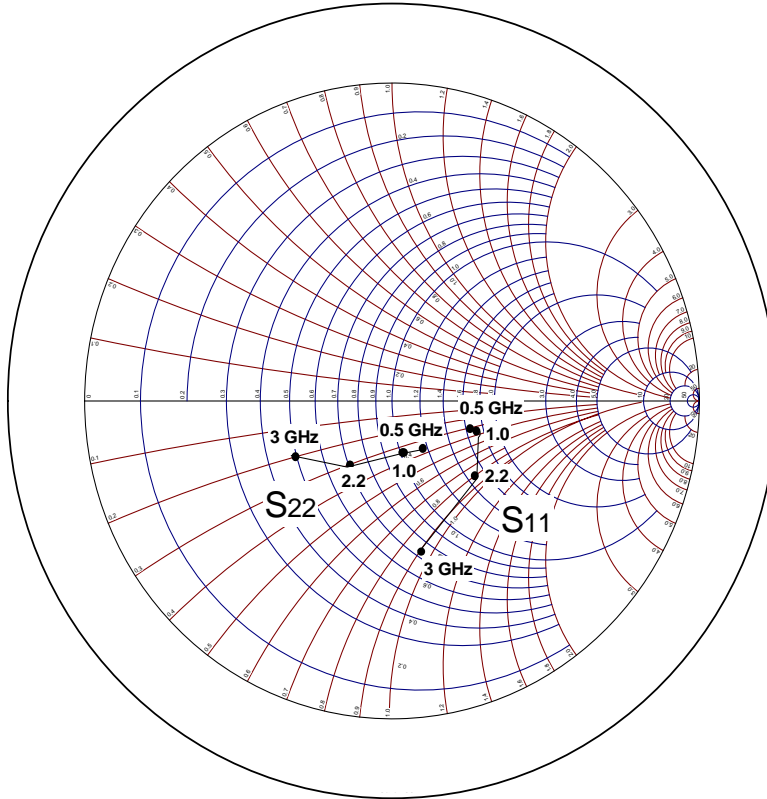


FIGURE 11. S11 AND S22 vs FREQUENCY

Small Outline Transistor Plastic Packages (SC70-6)

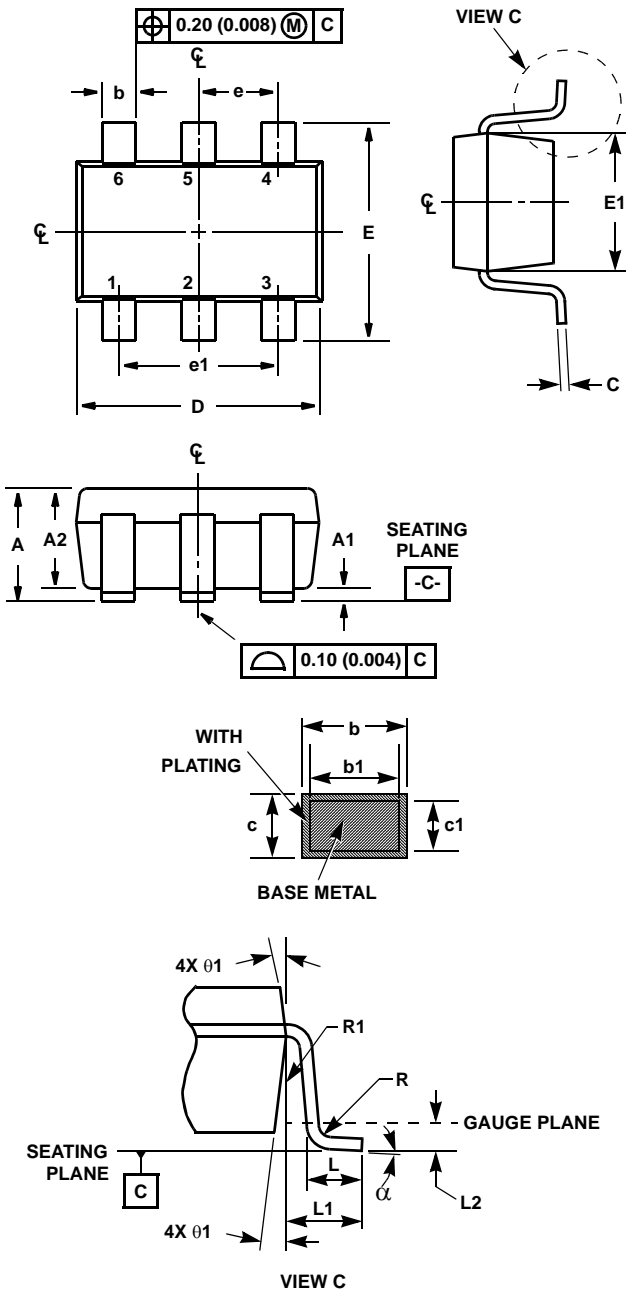

P6.049A

6 LEAD SMALL OUTLINE TRANSISTOR PLASTIC PACKAGE

| SYMBOL | INCHES | | MILLIMETERS | | NOTES |
|--------|------------|-------|-------------|------|-------|
| | MIN | MAX | MIN | MAX | |
| A | 0.031 | 0.039 | 0.80 | 1.00 | - |
| A1 | 0.001 | 0.004 | 0.025 | 0.10 | - |
| A2 | 0.034 | 0.036 | 0.85 | 0.90 | - |
| b | 0.006 | 0.012 | 0.15 | 0.30 | - |
| b1 | 0.006 | 0.010 | 0.15 | 0.25 | - |
| c | 0.004 | 0.008 | 0.10 | 0.20 | 6 |
| c1 | 0.004 | 0.006 | 0.10 | 0.15 | 6 |
| D | 0.073 | 0.085 | 1.85 | 2.15 | 3 |
| E | 0.084 BSC | | 2.1 BSC | | - |
| E1 | 0.045 | 0.053 | 1.15 | 1.35 | 3 |
| e | 0.0256 Ref | | 0.65 Ref | | - |
| e1 | 0.0512 Ref | | 1.30 Ref | | - |
| L | 0.010 | 0.018 | 0.26 | 0.46 | 4 |
| L1 | 0.016 Ref. | | 0.400 Ref. | | - |
| L2 | 0.006 BSC | | 0.15 BSC | | - |
| N | 6 | | 6 | | 5 |
| R | 0.004 | - | 0.10 | - | - |
| α | 0° | 8° | 0° | 8° | - |

Rev. 0 7/05

NOTES:

1. Dimensioning and tolerance per ASME Y14.5M-1994.
2. Package conforms to EIAJ SC70 and JEDEC MO203AB.
3. Dimensions D and E1 are exclusive of mold flash, protrusions, or gate burrs.
4. Footlength L measured at reference to gauge plane.
5. "N" is the number of terminal positions.
6. These Dimensions apply to the flat section of the lead between 0.08mm and 0.15mm from the lead tip.
7. Controlling dimension: MILLIMETER. Converted inch dimensions are for reference only

All Intersil U.S. products are manufactured, assembled and tested utilizing ISO9000 quality systems. Intersil Corporation's quality certifications can be viewed at www.intersil.com/design/quality

Intersil products are sold by description only. Intersil Corporation reserves the right to make changes in circuit design, software and/or specifications at any time without notice. Accordingly, the reader is cautioned to verify that data sheets are current before placing orders. Information furnished by Intersil is believed to be accurate and reliable. However, no responsibility is assumed by Intersil or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Intersil or its subsidiaries.

For information regarding Intersil Corporation and its products, see www.intersil.com