


DATE	BY	REVISION
S.M./3.12		①
S.M./7.6		②
92/7.28		③

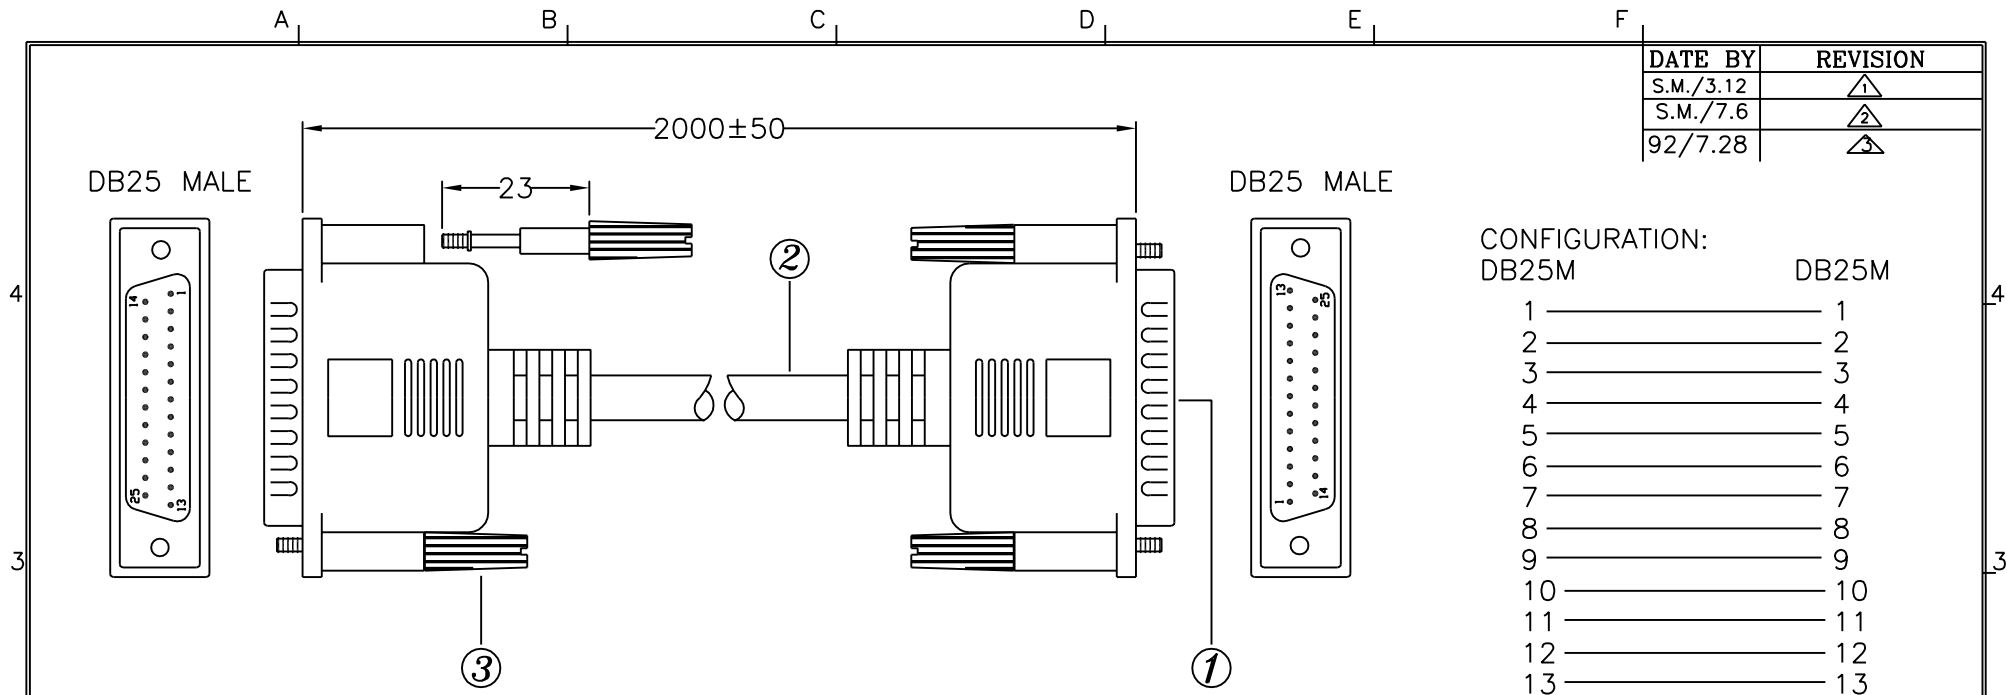

CONFIGURATION:

DB25M	DB25M
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15
16	16
17	17
18	18
19	19
20	20
21	21
22	22
23	23
24	24
25	25
SHIELD	SHIELD

MAT'L:  
 ③ 1. CABLE: #28,25C+1+AL/MY,O.D:6.5  
 2. CONNECTOR: DB25M,BLUE  
 3. THUMBSCREW: #4-40UNC,E23  
 NOTE:  
 1. TOTAL LENGTH: 2000±50mm  
 2. COLOR: BEIGE  
 3. MOLDED TYPE

YF03-0722

NO.	DESCRIPTION	QTY
③	THUMBSCREW: #4-40UNC,E23	4
②	#28,25C+1+AL/MY,O.D:6.5,BEIGE	2M
①	DB25M,BLUE	2

③ \*MODIFY: ITEM NO.: AK137 2M(CC206M2-05) → AK137 2M.  
 O.D: 7.0 → 6.5 Y.C.C/2003.7.28

DATE	12 MAR,1996	PARTS NO	RS0001M	TITLE:	DB25 MALE-DB25 MALE (MOLDED TYPE)	DRAWN	S.M. 3/12	CHECK	APPRO	ASSMANN ELECTRONICS,INC
UNIT	MM	DRAWN NO	002439							
SCALE		BUYER NO	002		AK137 2M					