

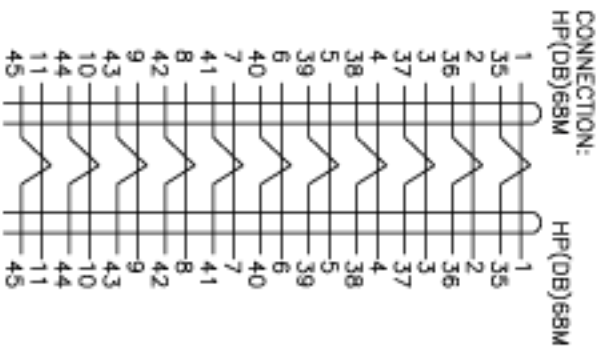


DATE BY REVISION

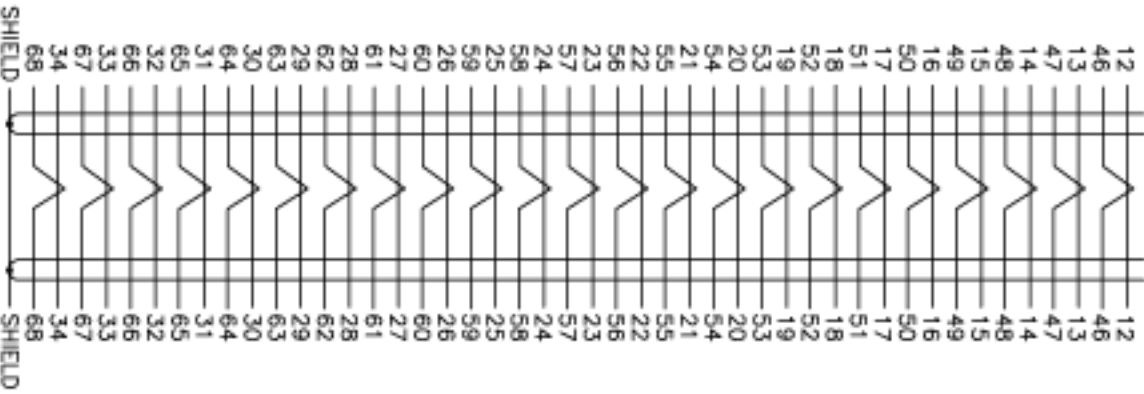

- MAT'L:
1. CABLE: #28, UL2919, 34P+1+AL/MY+BRAID, O.D:1.5 INSULATOR WITH P.P TYPE(Ø0.75mm)
 2. CONNECTOR: HPDB68M, I.D.C
 3. THUMBSCREW: #2-56UNC
 4. COPPER TAPE: (10 X 130)+(30 X 110)
- NOTE:
1. TOTAL LENGTH: 3FT±1inches
 - CABLE CUT: 3FT+5CM
 2. COLOR: BEIGE
 3. MOLDED TYPE
 4. 360° SOLDER
 5. ROHS COMPLIANT

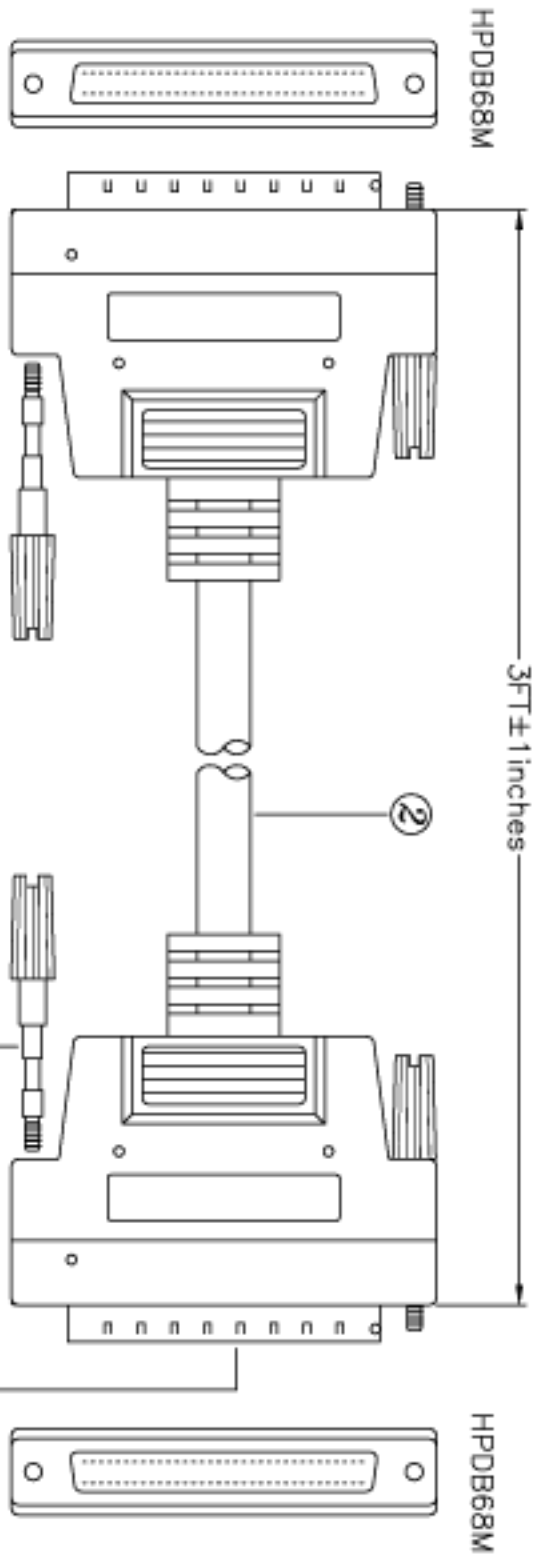

DATE	30 MAR, 2000	PARTS NO	SC3001M	TITLE:	HPDB68 MALE-HPDB68 MALE	Y.C.C	CHECK	APPRO	
UNIT	MM	DRAWN NO	000934		(MOLDED TYPE)	3/30			
SCALE		BUYER NO	002		AK-Y1301				
					DESCRIPTION	QTY			
					③ THUMBSCREW: #2-56UNC	4			
					② #28, UL2919, 34P+1+AL/MY+B.O.D:1.5	3FT			
					① HPDB68M, I.D.C	2			
ASSMANN ELECTRONICS, INC.									