

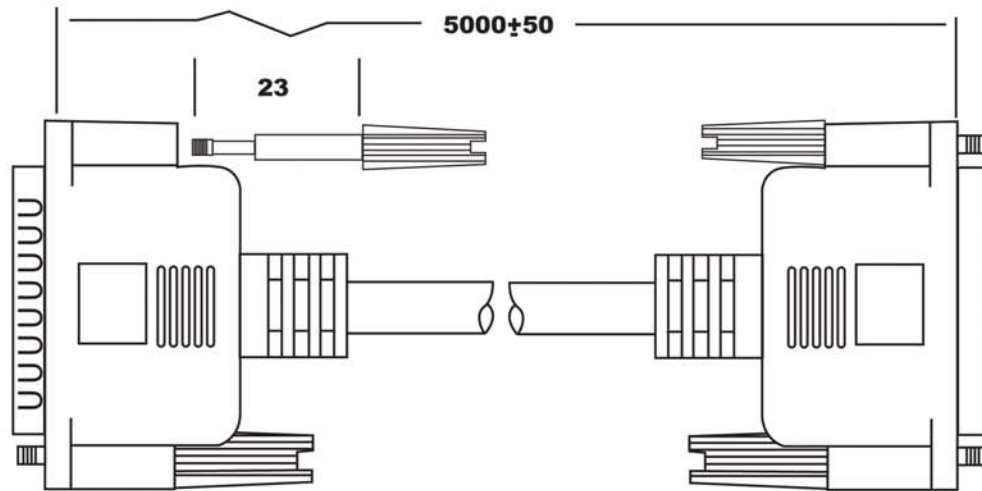



DB25 Male



DB25 Female



Configuration:

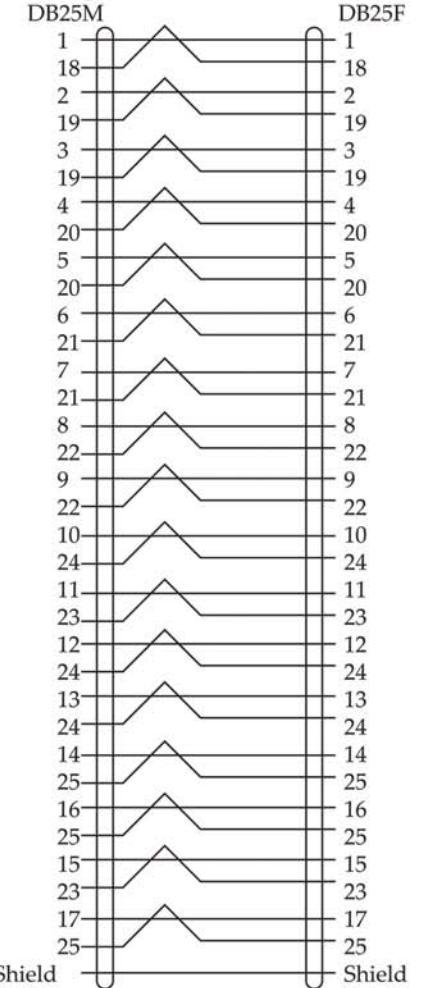

Material:

- 1.Cable: UL 20276 #28 18 P+1(#26)+AL/MY+85%Braid O.D:7.5
- 2.Connector:DB25M, Blue
DB25F, Blue
- 3.Thumbscrew: #4-40UNC, E23
- 4.Copper Tape: 30X95

Notes:

- 1.Total Length: **SEE "ITEM NO."**
- 2.Color: Beige
- 3.Molded Type
- 4.360°Solder



<i>ITEM NO</i>	AK733-1.8-R (1.8 Meters) AK734-3-R (3.0 Meters) AK735-5-R (5.0 Meters)
<i>TITLE</i>	IEEE 1284 Bi-Directional Extension Cable D-SUB 25-Pin Male to D-SUB 25-Pin Female

ASSMANN
Electronics, Inc.

1840 W. Drake Drive, Suite 101 - Tempe, AZ 85283
Toll Free: 1-877-277-6266 Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED
©Copyright 2008 by Assmann Electronic Components
All International Rights Reserved