
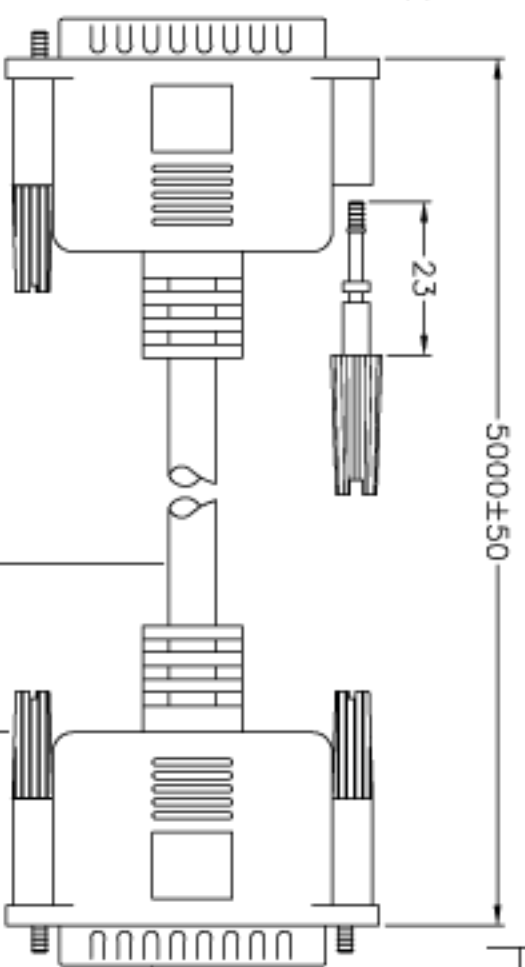
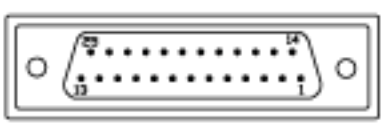


CONFIGURATION:
DB25M

DB25M

DB25 MALE

DB25 MALE

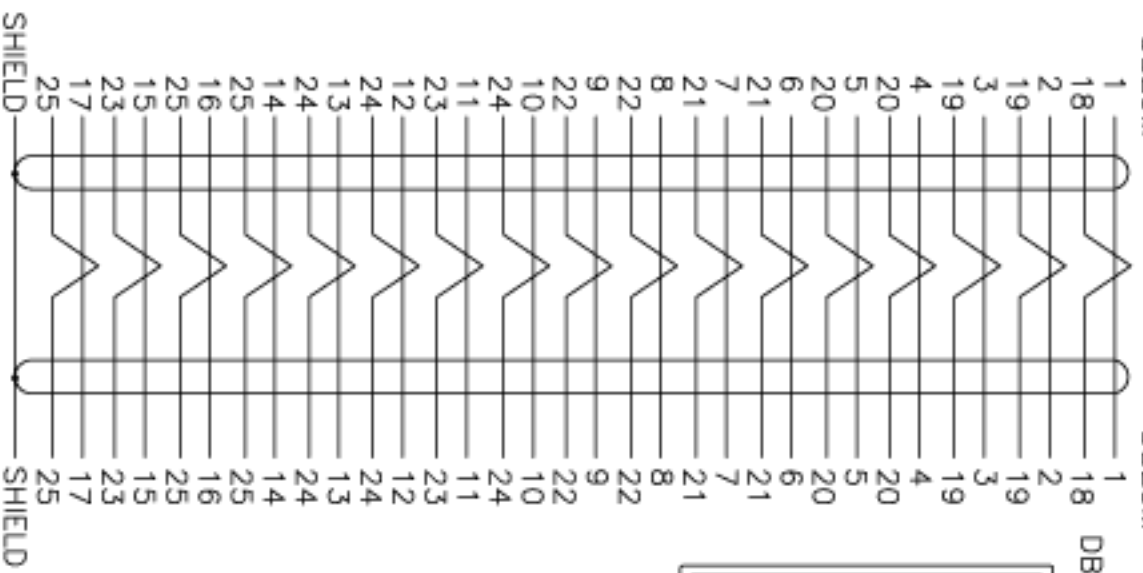

②
③
①

MAT'L:
1.CABLE:#28,UL20276,18P+1(#26)+AL/MY+85%Braid,O.D:7.5(IEEE1284)
2.CONNECTOR:DB25M,BLUE
3.THUMBSCREW:#4-40UNC,E23
4.COPPER TAPE:30 X 95

NOTE:

- 1.TOTAL LENGTH:5000±50mm
- 2.COLOR:BEIGE
- 3.MOLDED TYPE
- 4.360° SOLDER
- 5.ROHS COMPLIANT



DATE	30 JAN,2001	PARTS NO	PR5011M
UNIT	MM	DRAWN NO	001321
SCALE		BUYER NO	002

TITLE:	DB25 MALE-DB25 MALE (MOLDED TYPE) AK738 5M
--------	---

NO.	DESCRIPTION	QTY
③	THUMBSCREW:#4-40UNC,E23	4
②	#28,UL20276,18P+1+B,O.D:7.5,BEIGE	5M
①	DB25M,BLUE	2

DRAWN	Y.C.C 1/30	CHECK	APPRO
-------	---------------	-------	-------

ASSMANN ELECTRONICS,INC.