

CONFIGURATION: TWISTED PAIR AND ONE BY ONE


HPDB50M

HPDB50M

HPDB50 MALE

HPDB50 MALE

900±30

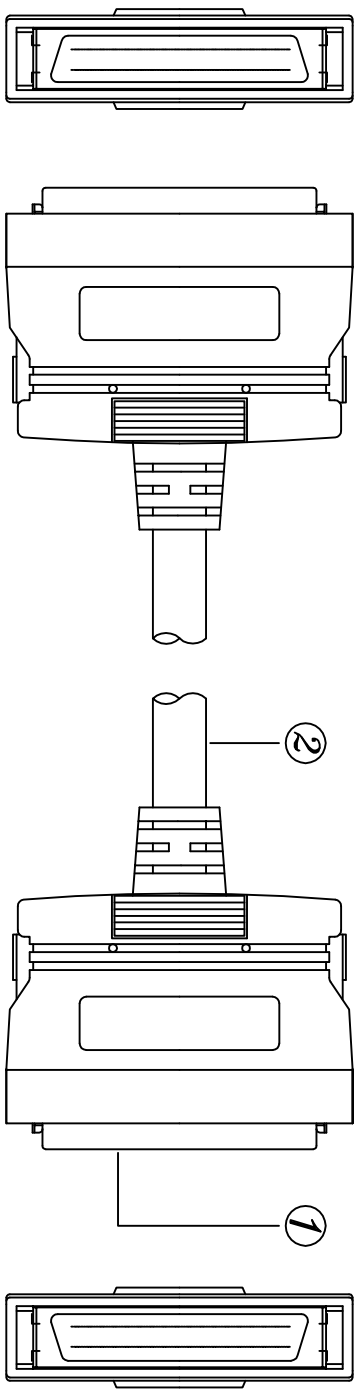

- MAT'L:
1. CABLE: #28, UL2919, 25P+1+AL/MY+B, O.D:9.5
INSULATION OF CONDUCTOR WITH P.P(Ø0.75)
 2. CONNECTOR: HPDB50M, I.D.C
 3. COPPER TAPE: (10 X 105)+(25 X 85)

NOTE:

1. TOTAL LENGTH: 900±30mm
- CABLE CUT: 950mm

2. COLOR: BEIGE
3. MOLDED TYPE
4. 360° SOLDER
5. ROHS COMPLIANT



SHIELD

(BRAID)

NO.	DESCRIPTION	QTY
②	#28, UL2919, 25P+1+AL/MY+B, O.D:9.5, BEIGE	0.9M
①	HPDB50M, I.D.C	2

DATE	30 MAY, 2000	PARTS NO	SC2301M
UNIT	MM	DRAWN NO	001015
SCALE		BUYER NO	002

TITLE: HPDB50 MALE-HPDB50 MALE
(MOLDED TYPE)
AK579/F-1-R 0.9M

DRAWN	Y.C.C 5/30	CHECK	APPRO	ASSMANN ELECTRONICS, INC.
-------	---------------	-------	-------	---------------------------