


**Electrical test:**  
 1. 100% short, open, miswire test  
 2. Conduct resistance: 2 Ohm(max)  
 3. Insulation resistance: 5Mohm(min)  
 4. dielectric test: DC 300V

PIN ASSIGNMENT		
P1		P2
1	WHITE	1
2	CRAY	2
3	YELLOW	3
4	PINK	4
5	ORANGE	5
6	RED	6
7	BROWN	7
8	GREEN	8
9	BLUE	9
SHIELD	D	SHIELD

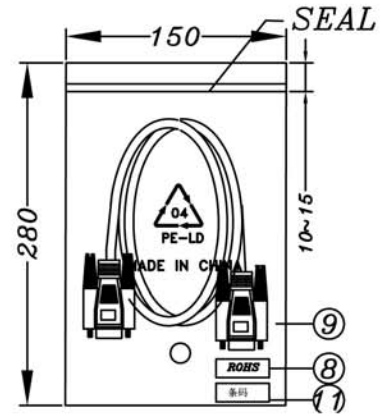

ROHS

16	PACKING TAPE COLOR YELLOW L=2800mm			1/100
15	TRANSPARENT ADHESIVE TAPE L=3000mm			1/100
14	CARTON 40*30*25CM K=A GLUE TYPE			1/100
13	WATERPROOF BAG (15+16)*34" T=0.04mm			1/100
12	CODE39: 45*20MM内容详见订单			2/100
11	条码: 45*20MM内容: 4016032062929			112/100
10	PE BAG 360*380*0.05mm PRINT BLACK"MADE IN CHINA"			1/10
9	PE BAG 150*280*0.05mm PRINT BLACK"MADE IN CHINA"	1		PCS
8	ROHS LABEL 35*22mm WHITE/BOTTOM TEXT/BLACK			112/100
7	OUTER MODEL PVC 45P COLOR BEIGE(CS-B02)	40		g
6	INNER MODEL PVC 65P COLOR BLACK	10		g
5	ROUND TIN OD1.0mm	0.54		g
4	HEAT SHINK TUBE OD1.5mm	2		15mm
3	THUMB SCERW #4-40UNC E32 BEIGE(CS-B02)	4		PCS
2	DB9/F SOLDER TYPE PLASTIC BLUE	2		P1,P2
1	NOUL 28AWG*9C+D+AL OD5.0mm COLOR BEIGE(CS-B02)	01	1	3000mm
NO. PART NO.	DESCRIPTION	VENDER	QTY	UNIT/REF

REV	REV./NO.	DESCRIPTION	DATE
		<b>ASSMANN</b> Electronics, Inc.	
		TITLE: DB9P/F TO DB9P/F CABLE 3000mm	
DRAW	Danny	2007/01/30	DWN NO.
JE			
CONFIRM			CUS. P/N: AK182-3M-R
DIRECTOR			
CONFIRM			CUS.
MANAGER			
APPROVAL			
SL			

SHEET 1 to 1

