


HIGH SPEED CAN BUS TRANSCEIVER

- L9616 MEETS ISO/DIS 11898 UP TO 1MEGABAUD
- TRANSMITTER
 - GENERATION OF DIFFERENTIAL OUTPUT SIGNALS
 - SHORT CIRCUIT PROTECTED FROM -5V TO 36V, DETECTION & SHUTDOWN
 - SLOPE CONTROL TO REDUCE RFI AND EMI
 - TWO STATES ADJUSTABLE SLOPE CONTROL ($\leq 1\text{MEGABAUD}/\leq 250\text{KBAUD}$)
- RECEIVER
 - DIFFERENTIAL INPUT WITH HIGH INTERFERENCE SUPPRESSION
 - COMMON MODE INPUT VOLTAGE RANGE (V_{COM}) FROM -2V TO $V_{\text{S}}+3\text{V}$
- ESD PROTECTION LEVEL UP TO 4kV
- PACKAGE: SO-8

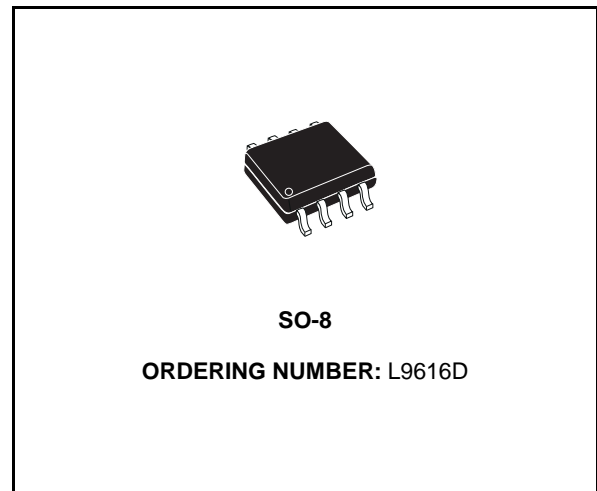


DESCRIPTION

The L9616 is a bidirectional transceiver for signal

conditioning and processing in connection with a CAN controller. Data rates of up to 1MEGABAUD are supported using either shielded or non-shielded pair of lines.

BLOCK DIAGRAM

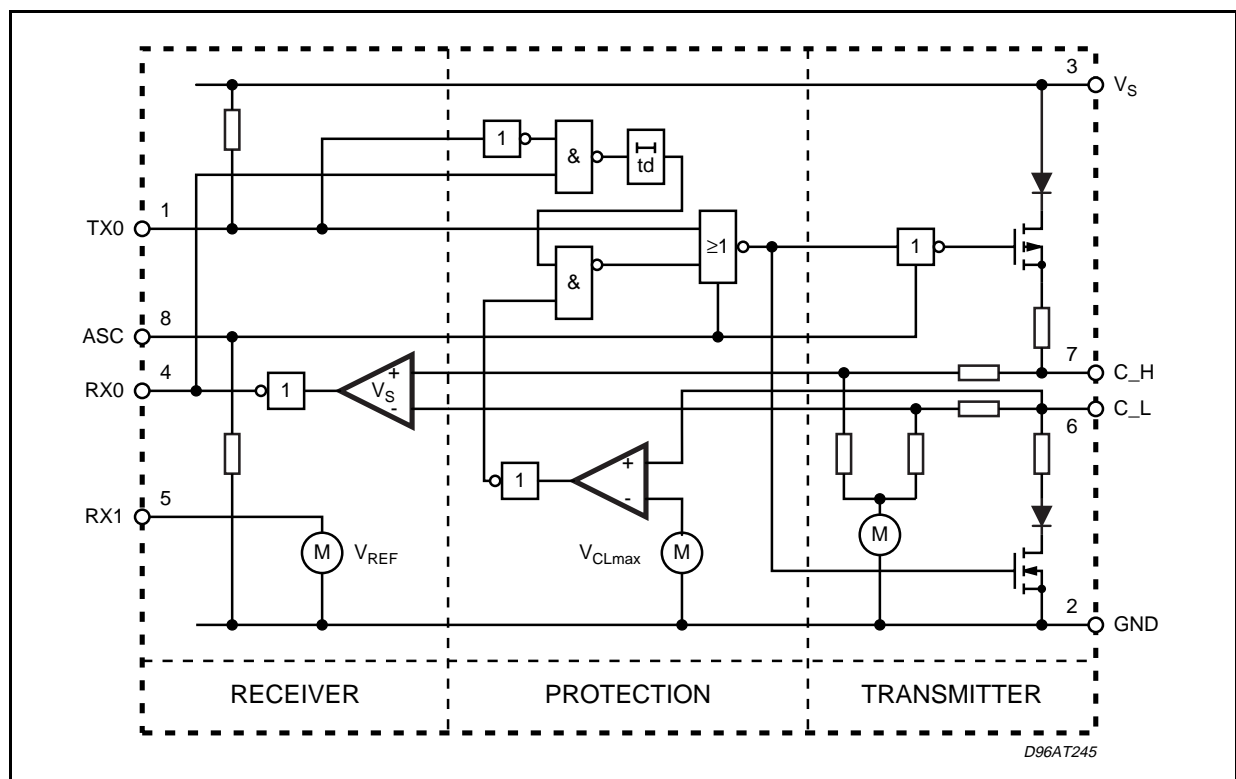


ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V_S	Supply Voltage	-0.3 to 7	V
V_{C_H} , V_{C_L}	Bus Voltage at C_H, C_L (VS 0 to 5.5V)	-5 to 36	V
I_{C_H} , I_{C_L}	Off State Leakage Current at C_H, C_L (VS =0 to 5.5V, V_{C_H} = -5 to 36V, V_{C_L} = -5 to 36)	-3 to 5	mA
V_{DC}	DC Voltage at TXO, ASC (VS 0 to 5.5V)	GND -0.3 to V_S +0.3	V
I_{RXO}	Output Current at RXO (VS 0 to 5.5V)	-0.3 to 1	mA
T_{stg} , T_J	Storage and Junction Temperature Range	-40 to 150	°C
T_{op}	Operating Temperature Range	-40 to 125	°C

All voltages, except bus voltage, are defined with respect to pin 2
Positive currents flow into the IC.

PIN CONNECTION

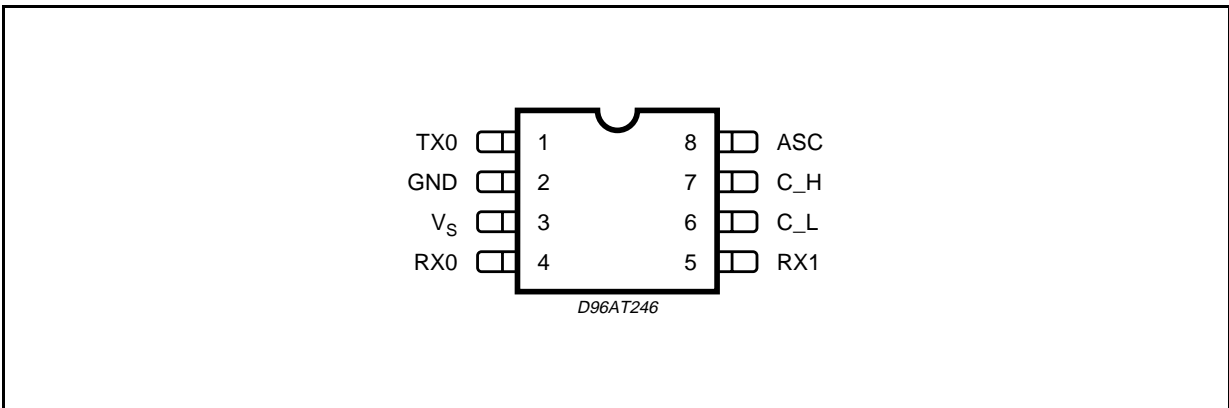

THERMAL DATA

Symbol	Parameter	Value	Unit

PIN FUNCTIONS

N.	Name	Function
1	TXO	Transmitter Input
2	GND	Ground
3	V_S	Supply Voltage
4	RXO	Receive Output
5	RX1	Reference Voltage
6	C_L	Low Side Bus Output
7	C_H	High Side Bus Output
8	ASC	Adjustable Slope Control

ELECTRICAL CHARACTERISTICS ($T_{OP} = -40$ to 125°C ; $V_S = 4.5$ to 5.5V ; Dominant: $V_{TXO} = \text{GND}$; Recessive: $V_{TXO} = V_S$; All voltages, except bus voltage, are defined with respect to pin 2. Positive currents flow into the IC unless otherwise specified.)

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
V _S	Supply Voltage		4.5	5	5.5	V
I _S	Supply Current	Dominant			80	mA
		Recessive			20	mA
TRANSMITTER SECTION (R _A = 60Ω between C _H and C _L)						
C _{TXO}	TXO Input Capacitance	0V < V _{TXO} < V _S		25		pF
V _{TXO}	TXO High Level Input Voltage		0.7 V _S		V _S	
	TXO Low Level Input Voltage		0		0.3 V _S	
I _{TXO}	TXO High Level Input Current	V _{TXO} = V _S	-2	0	2	μA
	TXO Low Level Input Current	V _{TXO} = GND	-275	0	-25	μA
C _{ASC}	ASC Input Capacitance	0V < V _{ASC} < V _S		25		pF
V _{ASC}	ASC Input Voltage for High Speed		0		0.1 V _S	
	ASC Input Voltage for Low Speed		0.9 V _S		V _S	
I _{ASC}	ASC Input Current	V _{ASC} = V _S	25		275	μA
		V _{ASC} = 0V	-2	0	2	μA
V _{C_H} , V _{C_L}	Bus Voltage Recessive	Recessive	0.4 V _S	0.5 V _S	0.6 V _S	
I _{C_H} , I _{C_L}	Leakage Current Recessive	V _{C_L} = V _{C_H} = -2 to 7V	-0.7		0.7	mA
		V _{C_L} = V _{C_H} = 1 to 4V	-0.3		0.3	mA
R _{IN(C_H, C_L)}	Input Resistance	Recessive	5		50	KΩ
R _{DIFF(C_H, C_L)}	Differential Input Resistance	Recessive	10		100	KΩ
V _{DIFF} = V _{C_H} - V _{C_L}	Differential Output Voltage	Dominant, R _A	1.5		3	V
V _{DIFF} = V _{C_H} - V _{C_L}	Differential Output Voltage	Recessive	-500	0	50	mV
t _d	Short Circuit Detection Time C _H to C _L ; C _H to B	R _{CS} < 1Ω	1	5	10	μs
I _A	Supply Current in Case of Short Circuit, C _H to C _L , C _H to B (time = t _d)			150		mA
V _{C_Lmax}	Overvoltage Protection Threshold on C _L		7	8	10	V
RECEIVE SECTION						
V _{R_{XO}}	R _{XO} High Level Output Voltage	V _{DIFF} < 0.5V; I _{R_{XO}} = 0.3mA; V _{C_H} = -2 to 7V; V _{C_L} = -2 to 7V;	0.9 V _S		V _S	V
	R _{XO} Low Level Output Voltage	V _{DIFF} > 0.9V; I _{R_{XO}} = 1mA; V _{C_H} = -2 to 7V; V _{C_L} = -2 to 7V;			0.5	V
V _S = V _{C_H} - V _{C_L}	Input Signal Threshold	V _{C_H} = -2 to 7V; V _{C_L} = -2 to 7V;	500	700	900	mV
V _{COM} = (V _{C_H} + V _{C_L})/2	Input Common Mode Voltage Range		-2		7	V
V _{HYS}	Differential Input Hysteresis			150		mV
REFERENCE OUTPUT						
V _{R_{X1}}	Reference Voltage	I _{R_{X1}} = 0	0.45 V _S	0.5 V _S	0.55 V _S	V
R _{R_{X1}}	Output Resistance		2		9	KΩ

DINAMIC CHARACTERISTICS ($C_A = 47\text{pF}$ between C_H and C_L ; $V_S = 5\text{V}$; $t_R < 5\text{ns}$; $C_{RXO} = 20\text{pF}$ between RXO and B ; $R_A = 60\Omega$ between C_H and C_L)

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
t _{OT}	Signal Delay TXO to C_H, C_L				50	ns
S _R	Differential Output Slew Rate (Transmitter)	V _{ASC} = 0V	20		50	V/μs
		V _{ASC} = V _S	5		20	V/μs
t _{OR}	Signal Delay C_H, C_L to R _{XO}	V _{ASC} = 0V			150	ns
t _{OTR}	Signal Delay T _{XO} to R _{XO}	V _{ASC} = 0V			300	ns

FUNCTIONAL DESCRIPTION

The L9616 is used as an interface between a CAN controller and the physical bus. The device provides transmitting capability to the CAN controller.

The transmitter outputs C_H and C_L are protected against short circuits and electrical transients which may occur in an automotive environment. In case of short circuit (C_H to C_L, C_H to B) the protection circuit recognizes this fault condition and the transmitter output stages are disabled with a delay of max. 10μs to prevent destruction of the IC and high consumption of supply current I_S. If V_{C_L} > V_{C_Lmax} the transmitter output stages would be disabled immediately.

Pin ASC makes it possible to select two different


modes of operation: High speed ($\leq 1\text{MEGABaud}$) and low speed ($\leq 250\text{kBaud}$).

The ASC pin is tied to GND for normal operation at $\leq 1\text{MEGABaud}$. For slower speed operation at $\leq 250\text{kBaud}$ the rise and fall slope of the bus output can be decreased to reduce EMI by connecting the ASC pin to V_s .


FUNCTIONAL TABLE

TXO	C_H	C_L	Bus State	RXO
L	H	L	Dominant	L
H or Floating	Floating Vs/2	Floating Vs/2	Recessive	H


TYPICAL APPLICATION

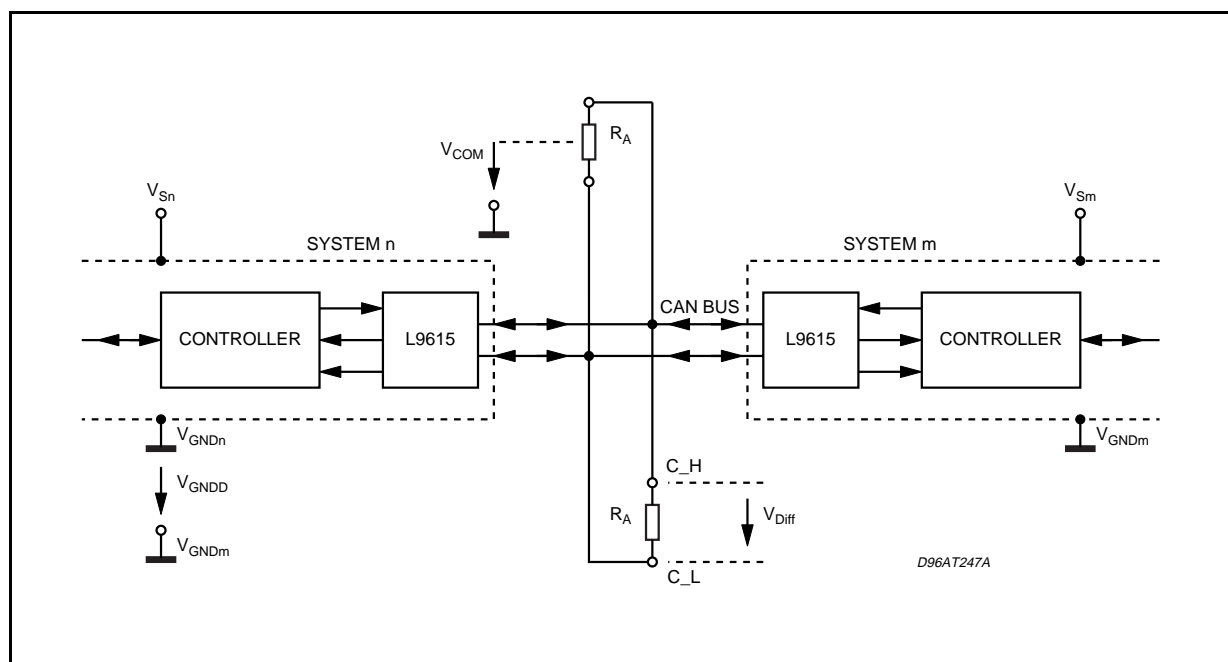

TIMING DIAGRAM

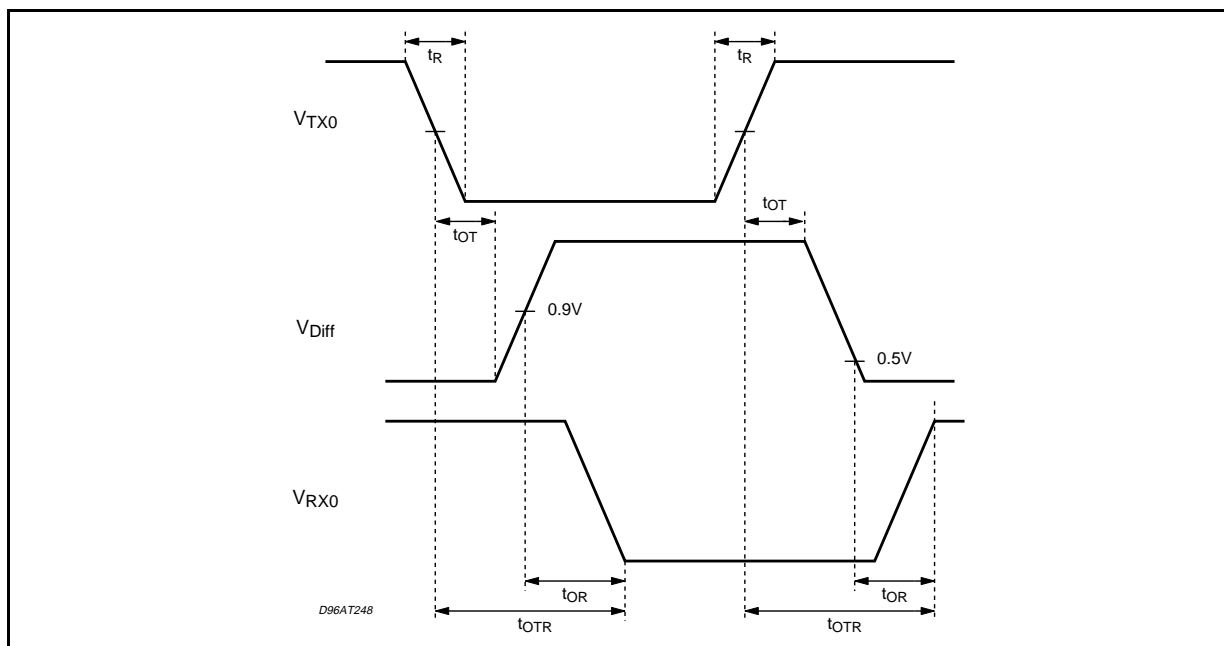


EMC PERFORMANCE (RECEIVER)

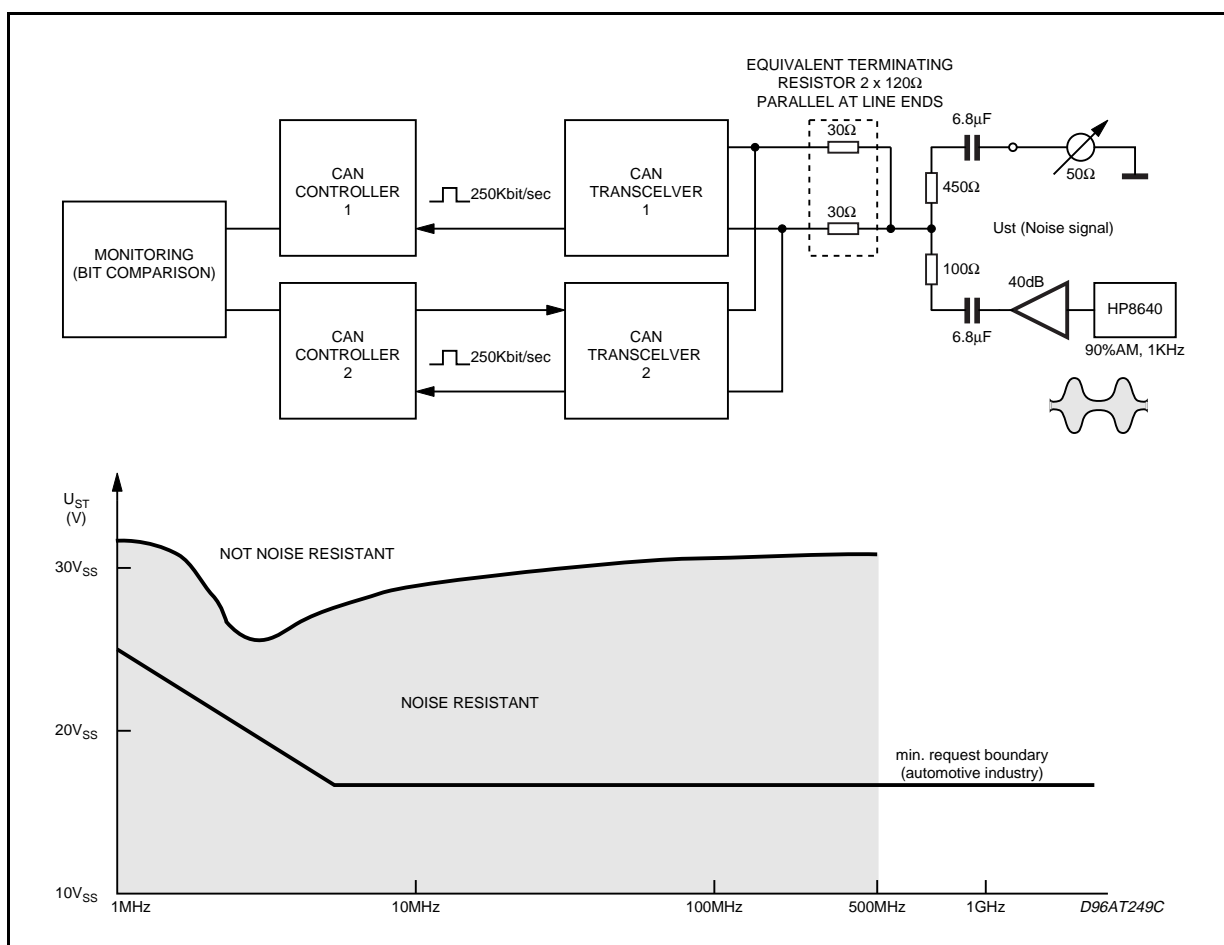


DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A			1.75			0.069
a1	0.1		0.25	0.004		0.010
a2			1.65			0.065
a3	0.65		0.85	0.026		0.033
b	0.35		0.48	0.014		0.019
b1	0.19		0.25	0.007		0.010
C	0.25		0.5	0.010		0.020
c1	45° (typ.)					
D (1)	4.8		5.0	0.189		0.197
E	5.8		6.2	0.228		0.244
e		1.27			0.050	
e3		3.81			0.150	
F (1)	3.8		4.0	0.15		0.157
L	0.4		1.27	0.016		0.050
M			0.6			0.024
S	8° (max.)					

(1) D and F do not include mold flash or protrusions. Mold flash or protrusions shall not exceed 0.15mm (.006inch).

OUTLINE AND MECHANICAL DATA



SO8

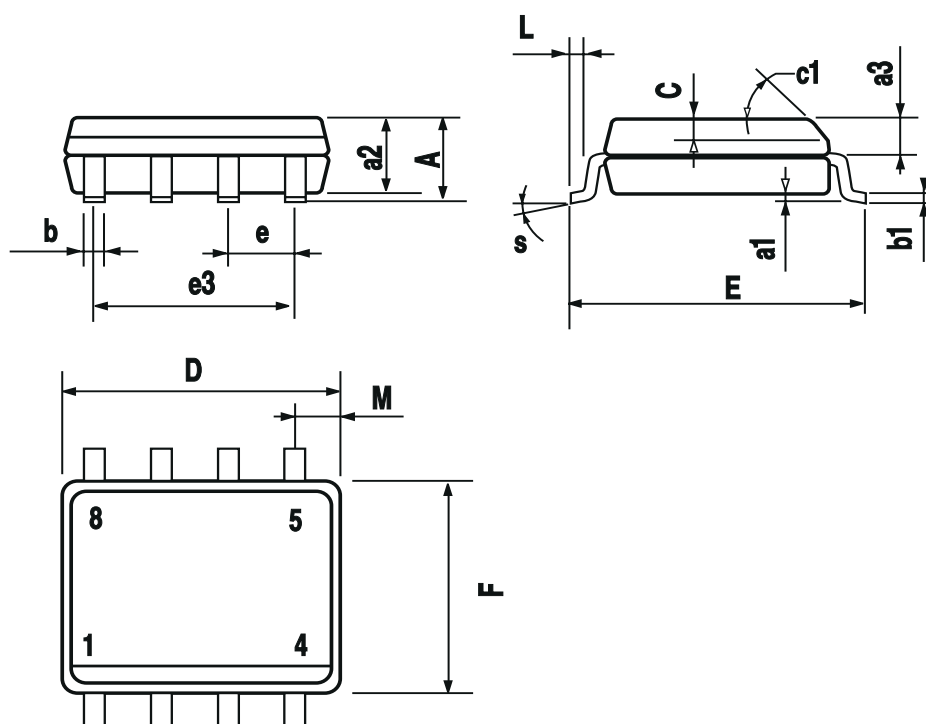

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specification mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics

© 2000 STMicroelectronics – Printed in Italy – All Rights Reserved

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - China - Finland - France - Germany - Hong Kong - India - Italy - Japan - Malaysia - Malta - Morocco -
Singapore - Spain - Sweden - Switzerland - United Kingdom - U.S.A.

<http://www.st.com>