



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION .19
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
		CE	16	D	REV PER EC	OB60-0061-03	30SEP03 WS JH

- 1. DIMENSIONS IN [] ARE IN INCHES
- 2. MAXIMUM CONNECTOR LOSS IS EQUAL TO 0.50 dB PLUS CABLE ATTENUATION.

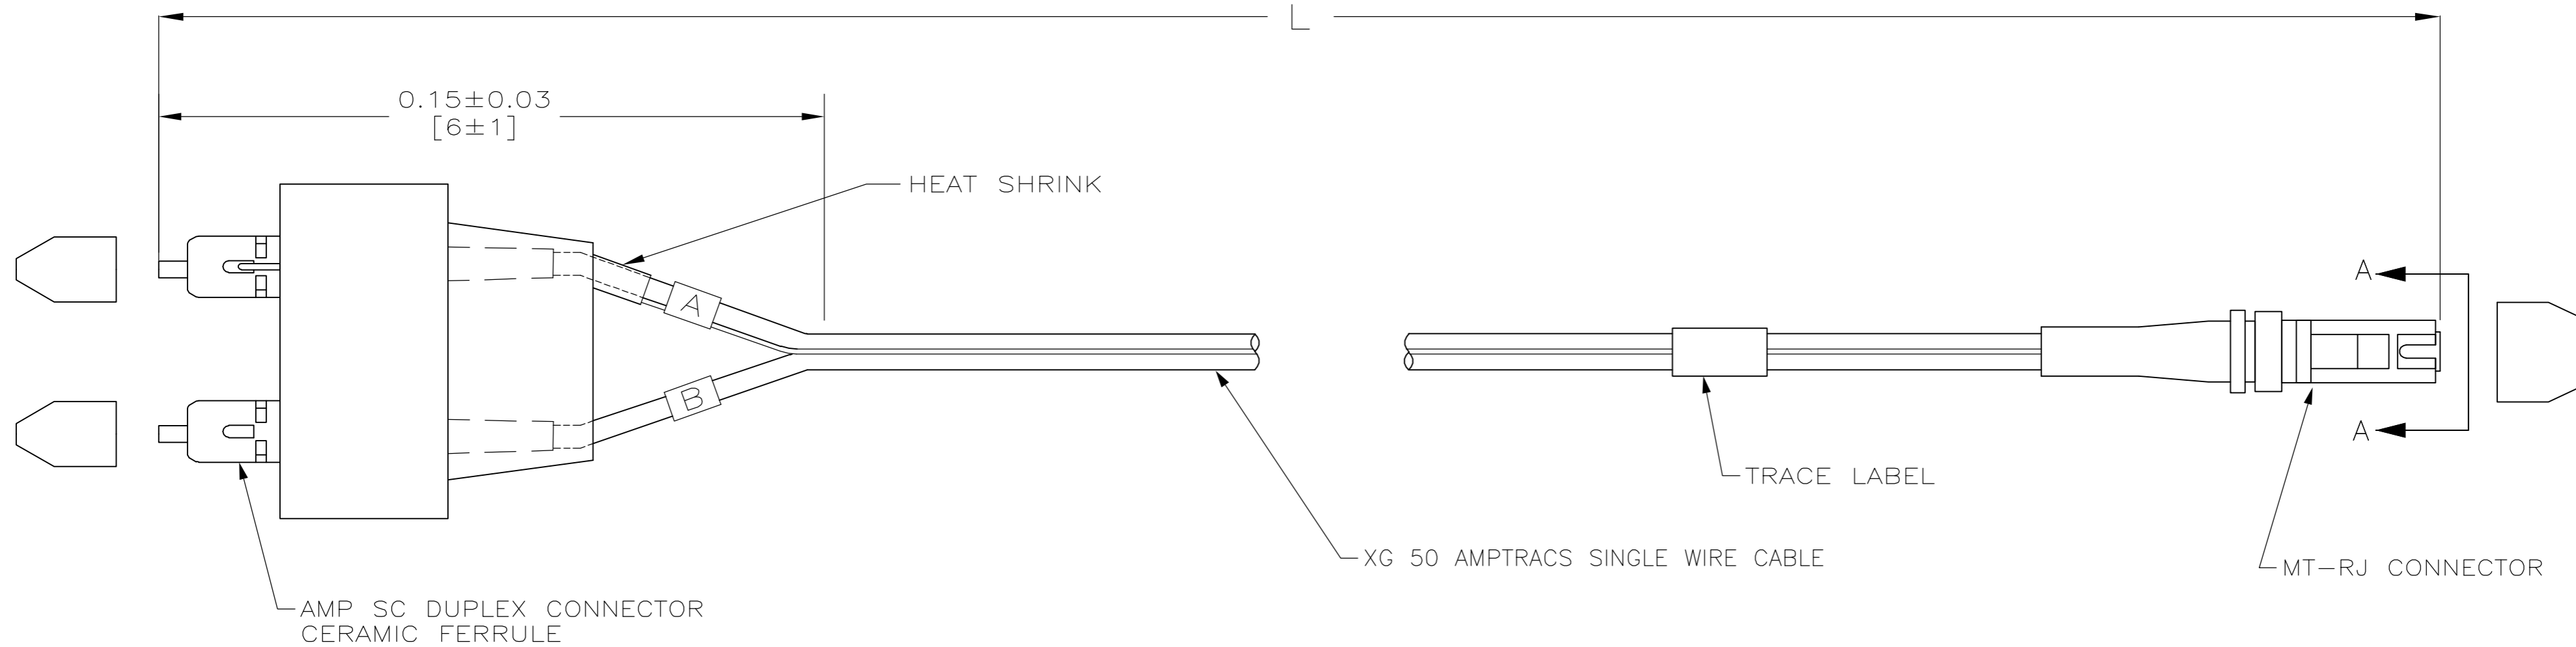

FIBER PATH	
SC POSITION	MT-RJ POSITION
A	B
B	A

0.52	10.0±0.15 [393.7±6]	1-1435356-0
0.52	7.0±0.08 [275.6±3]	1435356-7
0.51	5.0±0.08 [196.9±3]	1435356-5
-	-	-
0.50	3.0±0.05 [118.1±2.0]	1435356-3
0.50	2.0±0.05 [78.7±2.0]	1435356-2
0.50	1.0±0.05 [39.4±2.0]	1435356-1
CONNECTOR LOSS (dB) Δ		L
		PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN W SOURBEER 21MAR03	AMP Incorporated Harrisburg, PA 17105-3608
CHK J HOFFER 21MAR03	
APVD J APGAR 21MAR03	
PRODUCT SPEC	
APPLICATION SPEC	NAME CABLE ASSEMBLY, FIBER OPTIC, AMPTRACS, MT-RJ TO SC, DUPLEX, XG, 50um
MATERIAL	SIZE A2
FINISH	CAGE CODE 00779
	DRAWING NO C=1435356
	RESTRICTED TO
	SCALE NTS
	SHEET 1 OF 1
	REV D
	CUSTOMER DRAWING