


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION .19
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
CE	16				
	C	REV PER EC OB60-0059-03	30SEP03	WS	JH

1. DIMENSIONS IN [] ARE IN INCHES
2. MAXIMUM CONNECTOR LOSS IS EQUAL TO 0.50 dB PLUS CABLE ATTENUATION.

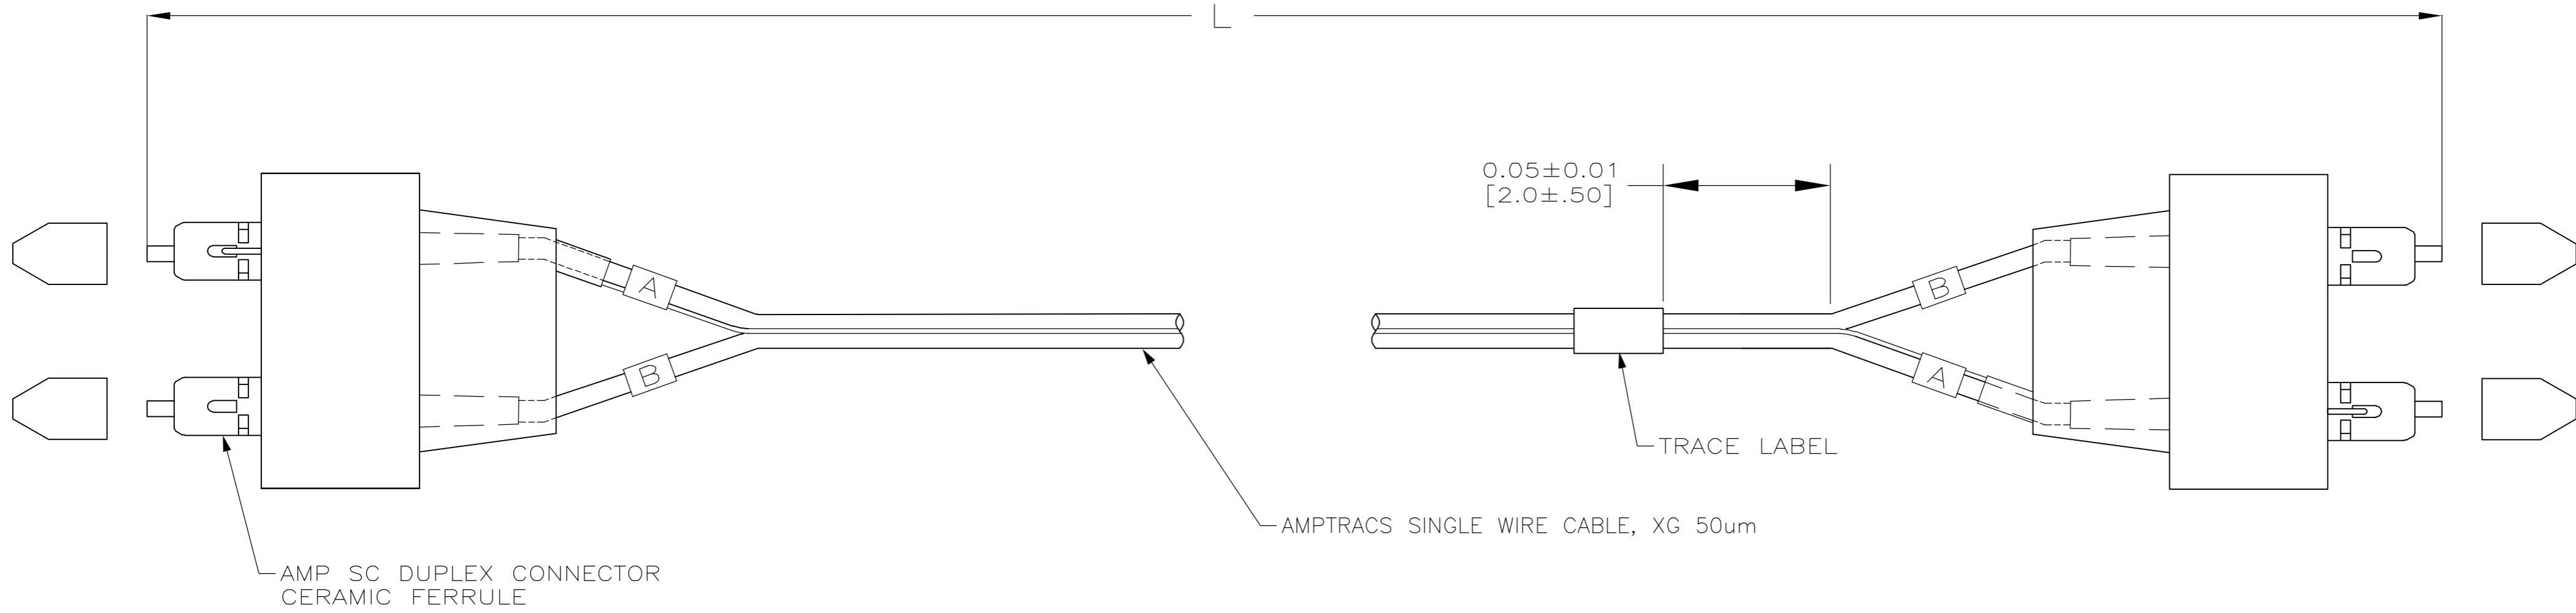

0.52	10.0±0.15 [393.7±6]	1-1435725-0
0.52	7.0±0.08 [275.6±3]	1435725-7
0.51	5.0±0.08 [196.9±3]	1435725-5
-	-	-
0.50	3.0±0.05 [118.1±2.0]	1435725-3
0.50	2.0±0.05 [78.7±2.0]	1435725-2
0.50	1.0±0.05 [39.4±2.0]	1435725-1
CONNECTOR LOSS (dB) Δ		L PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	W SOURBEER	21MAR03
CHK	J HOFFER	21MAR03
APVD	J APGAR	21MAR03

AMP Incorporated
Harrisburg, PA 17105-3608

CABLE ASSEMBLY, FIBER OPTIC,
AMPTRACS, SC TO SC, DUPLEX, XG, 50um

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C=1435725	-

CUSTOMER DRAWING SCALE NTS SHEET 1 OF 1 REV C

1435725