IN THIRD ANGLE PROJECTION
G IS UNPUBLISHED. RELEASED FOR PUBLICATION ,19 .
COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

| PROD CODE | LOC | DIST |
|---|---|---|
| 4089 | DF | 50 |

| ZONE | LTR | REV DESCRI |
|---|---|---|
| | P | REDWN & REV PER |

| NO. | A ⚠1 | |
|---|---|---|
| -1 | 8.00 [203.2] | |
| -2 | 6.00 [152.4] | |
| -3 | 5.00 [127.0] | |
| -4 | 9.00 [228.6] | OBSOLETE |
| -5 | 60.00 [1524.0] | |
| -6 | 33.50 [850.9] | OBSOLETE |
| -7 | 34.50 [876.3] | OBSOLETE |
| -8 | 35.50 [901.7] | OBSOLETE |
| -9 | 81.00 [2057.4] | |
| 6-0 | 73.00 [1854.2] | OBSOLETE |
| 6-1 | 89.00 [2260.6] | OBSOLETE |
| 6-2 | 18.00 [457.2] | |
| 6-3 | 12.00 [304.8] | |
| 6-4 | 6.25 [158.8] | |
| 6-5 | 120.00 [3048.0] | OBSOLETE |
| 6-6 | 24.00 [609.6] | |
| 6-7 | 36.00 [914.4] | |
| 6-8 | 42.00 [1066.8] | OBSOLETE |
| 6-9 | 96.00 [2438.4] | |
| 6-0 | 72.00 [1828.8] | OBSOLETE |
| 6-1 | 48.00 [1219.2] | |
| 6-2 | 84.00 [2133.6] | OBSOLETE |
| 6-3 | 240.00 [6096.0] | OBSOLETE |
| 6-4 | 30.00 [762.0] | |
| 6-5 | 15.00 [381.0] | |
| 6-6 | 180.00 [4572.0] | OBSOLETE |
| 6-7 | 144.00 [3657.6] | OBSOLETE |
| 6-8 | 21.00 [533.4] | |
| 6-9 | 216.00 [5486.4] | OBSOLETE |
| 6-0 | 160.00 [4064.0] | OBSOLETE |
| 6-1 | 22.00 [558.8] | OBSOLETE |
| 6-2 | 31.00 [787.4] | OBSOLETE |
| 6-3 | 20.00 [508.0] | OBSOLETE |
| 6-4 | 11.00 [279.4] | OBSOLETE |
| 6-5 | 10.00 [254.0] | OBSOLETE |
| 6-6 | 14.00 [355.6] | OBSOLETE |
| 6-7 | 168.00 [4267.2] | OBSOLETE |
| 6-8 | 40.00 [1016.0] | |
| 6-9 | 55.00 [1397.0] | OBSOLETE |
| 5-0 | 11.81 [300.0] | OBSOLETE |
| 5-1 | 108.00 [2743.2] | OBSOLETE |
| 5-2 | 26.00 [660.4] | |




CAP (QTY = 2)
MAT'L: GLASS EPOXY
COLOR: RED
(USED ON LEADS
OF 30" OR SHORTER ONLY)

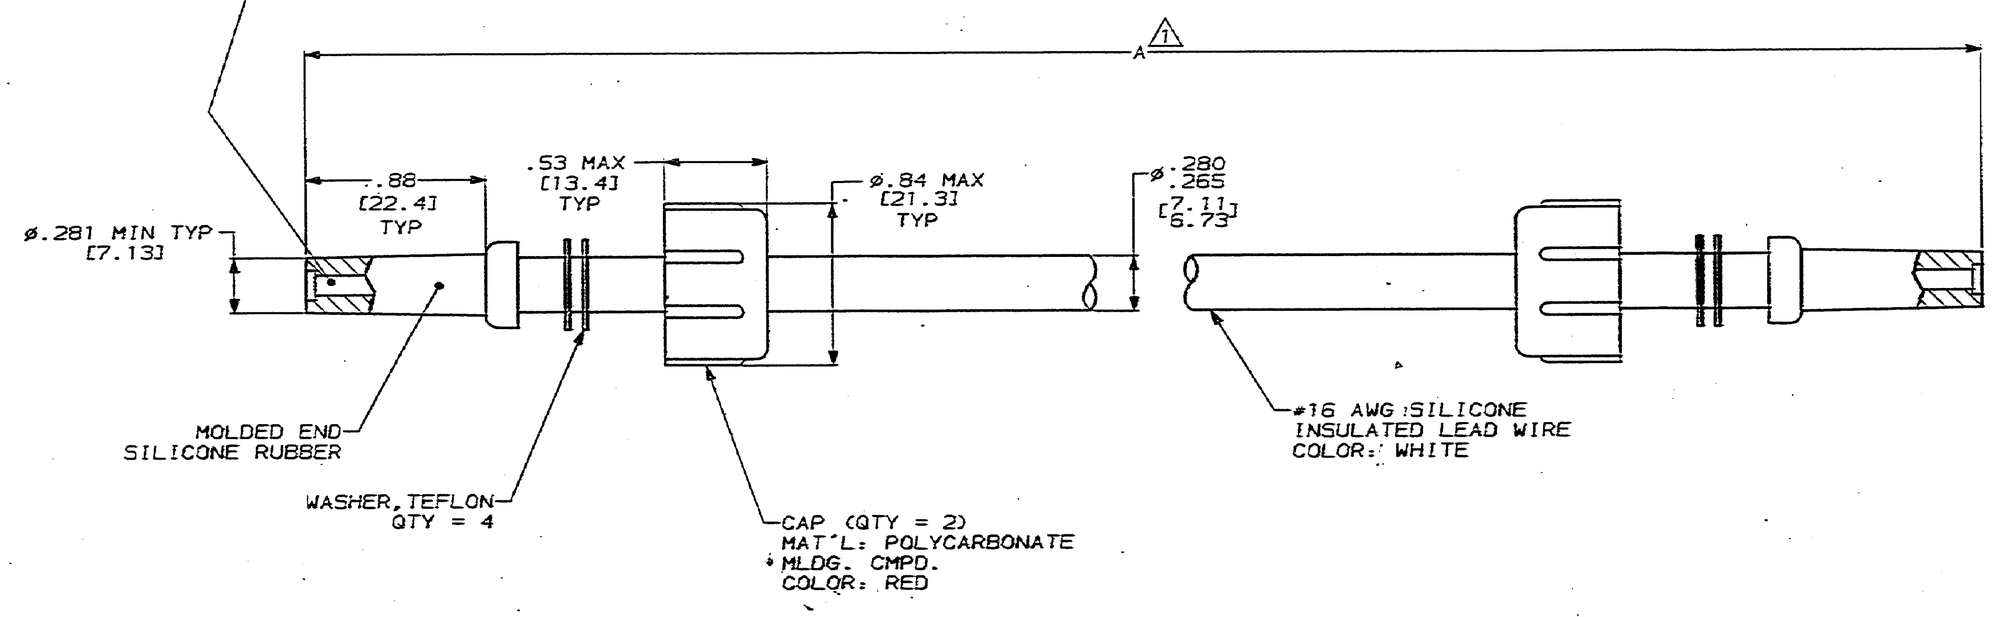


OLERANCE OF LEAD LENGTH:
P TO 24 INCHES [609.6] = ±.12 [±3.0]
4 INCHES [609.6] & UP = ±1%

ARKED PER MIL-STD-130.

O MATE WITH AMP LGH-1
ECEPTACLE WITH .88 [22.4] BARREL DEPTH.

PERATING VOLTAGE: 20 KVDC AT 0 TO 70,000 FEET, -55°C TO 125°C.

IN LEAD LENGTH IS 5 INCHES.

| | | |
|---|---|---|
| DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES [mm] TOLERANCES ON : 2 PLC DEC ± .02 [0.5] 3 PLC DEC ± - ANGLES ± - | DR 9-13-91 C.C.THOMAS | AMP |
| | CHK 9-23-91 S.GLADFELTER | |
| | APPD 9-23-91 S.GLADFELTER | NAME LEAD AS |
| MATERIAL SEE CALLOUTS | APPD 9-23-91 C.THOMAS | DOUBLE |
| | PRODUCT SPEC - | |
| FINISH - | APPLICATION SPEC - | SIZE D / CAGE CODE 00779 |
| | WEIGHT - | SCALE 2:1 |

AMP INCORPORATED
Harrisburg, Pa. 17105

'Y, LGH-1,
OLDED END

NO
830126
SHEET 1 OF 1

TOMER DRAWING