
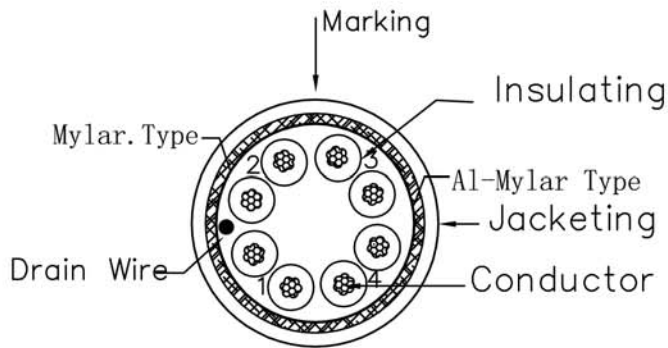


DATE	REV	DESCRIPTION	BY	CHKD

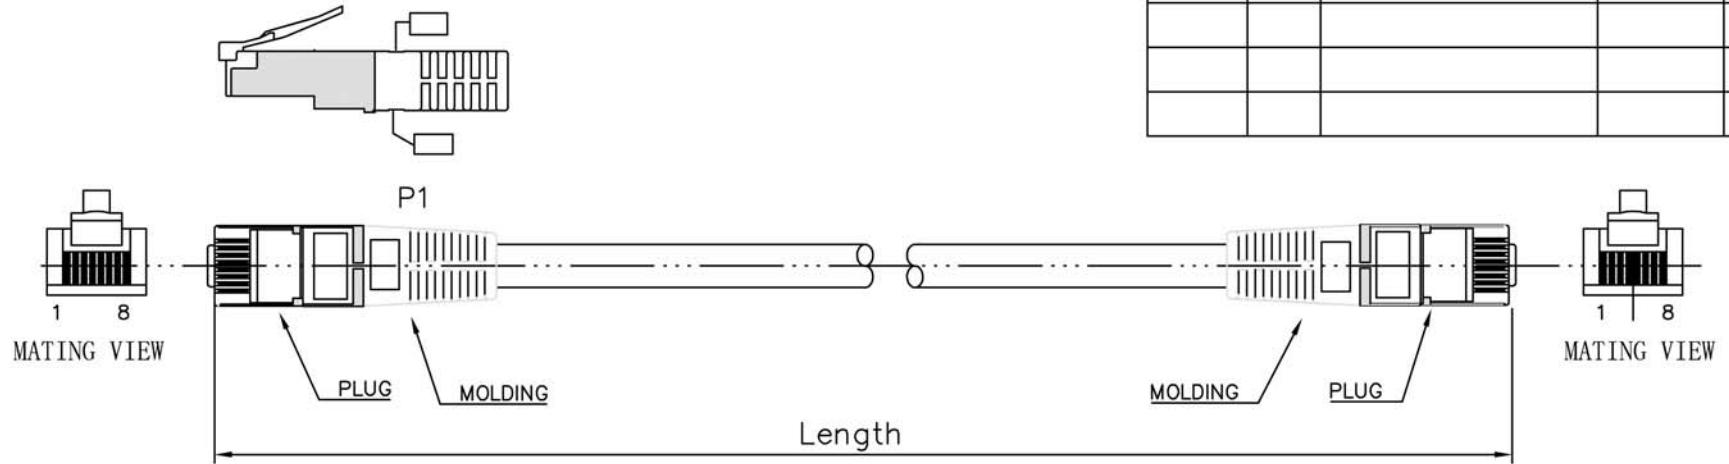


Lead	<1000ppm
Cadmium	<100ppm
Mercury	<1000ppm
Chromium	<1000ppm
PBB	<1000ppm
PBDE	<1000ppm

Material:ROHS compliant from OCT.2004

PA/R	PINOUT		
	P1(T568B)	WIRE	P2(T568B)
1	1	WHT/ORG	1
	2	ORG	2
2	3	WHT/GRN	3
	6	GRN	6
3	4	BLU	4
	5	WHT/BLU	5
4	7	WHT/BRN	7
	8	BRN	8

Conductor	Bare Copper 26AWG 7/0.16±0.015mm
Insulation	Thickness:MIN at any point:0.15mm MAX AVG:0.25mm Diameter:0.92±0.06mm
Jacketing	PVC Thickness:MIN at any point:0.50mm MAX AVG:0.60mm Diameter:5.6±0.2mm

WIRE	CAT. 5E FTP STR
PLUG	YUS-06
Length	XXX

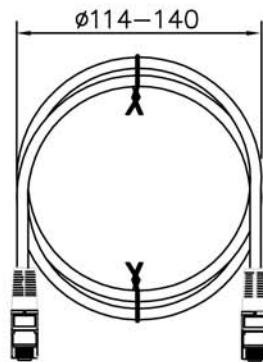

Cable Length Tolerance	
0.5m~2.0m :	+1.0/-1.0cm
3.0m~5.0m :	+1.0/-2.0cm
6.0m~10.0m :	+8.0/-2.0cm
11.0m~20.0m :	+13.0/-2.0cm
above 20.0m :	+18.0/-2.0cm

3RD

## ASSMANN ELECTRONIC INC

DRAW.NO	YUS-06	ITEM	A-MCSP-800XXX/X-R		
DEPARTMENT	R&D	DRAW	Peace Jing	DATE	2006/03/17
SCALE		CHECKER		DATE	
UNIT	MM	APPROVAL		DATE	