


**NOTE:**

- CABLE:**  
 UL2725 80°C 30V [26AWG(1/0.404)\*2F  
 +AL/MY+DRAIN WIRE(1/0.32)\*2]TIN  
 INS:FOAM-PE OD:φ1.1±0.05mm  
 PVC JACKET OD:φ(2.2±0.1)\*(7.8±0.2)mm COLOR:RED (PANTONE 200C)  
 PRINT: 2725 E209329 R AWM 80°C 30V VW-1 Serial ATA 26AWG LIAN FENG (BLACK WORD)  
 IMPEDANCE: 100±5 OHM (SUPPLIER: LIAN FENG)
- CONNECTOR:**  
 2-1 MATERIAL:  
 HOUSING: HIGH TEMPERATURE POLYESTER & GLASS FIBER UL 94V-0  
 TERMINAL: COPPER ALLOY  
 2-1 PLATING:  
 CONTACT AREA: 15u" GOLD PLATED
- HOOD: MOLDED TYPE, PVC 45P, COLOR:BLACK(NK-K01)**
- CABLE ASS'Y ELECTRICAL TEST:**  
 4-1 100% OPEN SHORT & MIS WIRE TEST  
 4-2 CONTACT RESISTANCE 2 OHM MAX  
 4-3 INSULATION RESISTANCE 20M OHM MIN
- PACKING: SEE P-0039 REV.C PACKING DRAWING (BINDING SIZE MUST BE SMALLER THAN BLISTER)**

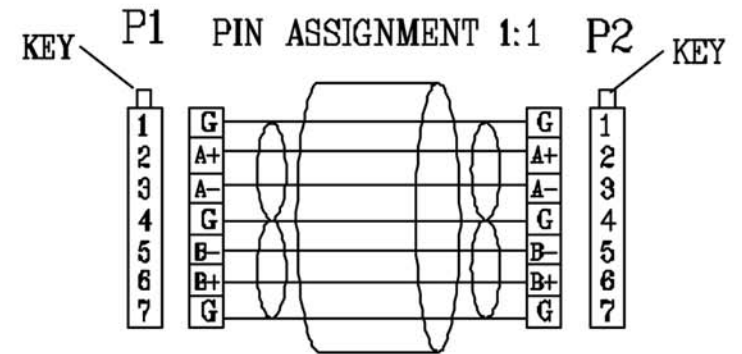

ITEM NO	<b>AK-SATA-XXXDL-R</b>
TITLE	Serial ATA, 2X Signal, Receptacle, LE, 1 Straight, 1 Down, Left Angle

**ASSMANN**  
Electronics, Inc.

1840 W. Drake Drive, Suite 101 - Tempe, AZ 85283  
 Toll Free: 1-877-277-6266 Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED  
 © Copyright 2008 by Assmann Electronic Components  
 All International Rights Reserved