


ROHS-COMPLIANT ⚠

LTR	REV.	DESCRIPTION	DATE
⚠	B	ECN # D51024-7 ADD ROHS	10/24/05

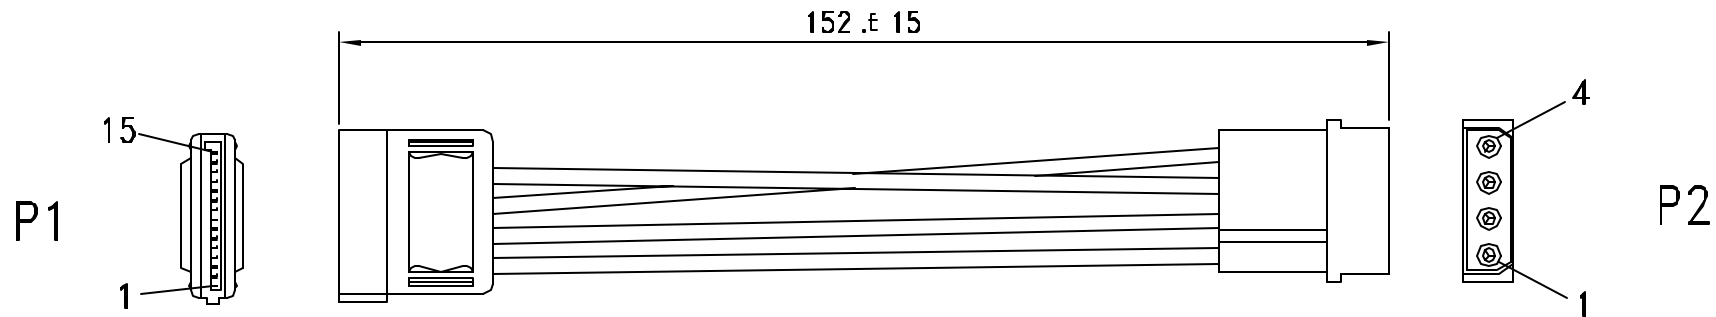

NOTE:

1. HOOK UP WIRE : UL1007 18AWG COLOR:YELLOW, BLACK, RED
2. CONNECTOR :
 P1 : 15 PIN SATA SOCKET SOLDER TYPE GOLD PLATED 15u" CONTACT
 P2 : 4 PIN MATE LOCK MALE .

HOUSING: JWT P/N: C5081H0-4P
 TERMINAL: JWT P/N: C5081T0B-2 .

- 3.HOOD: P1: MOLDED TYPE, PVC 45P, COLOR:BLACK(NK-K01)
- 4.ELECTRICAL TEST: <1>100% OPEN SHORT & MIS WIRE TEST.
 <2>CONTACT RESISTANCE 3 Ohms MAX
 <3>INSULATION RESISTANCE 20M Ohms MIN

- 5.PACKING: SEE P-0039 REV.C PACKING DRAWING
 (BINDING SIZE MUST BE SMALLER THAN BLISTER)
 EAN CODE: 4016032129653

- 6.BLISTER SIZE: DB VP2

P1	P2
1, 2, 3 <u>YELLOW</u>	1
4, 5, 6 <u>BLACK</u>	2
7, 8, 9 <u>RED</u>	4
10, 11, 12 <u>BLACK</u>	3

Tolerance Inch M/M			ASSMANN Electronics, Inc.	
.X	.015	.30		
.XX	.010	.10		
.XXX	.005	.05	Title	
Draw			SERIAL ATA POWER SUPPLY CABLE	
FANNIE 10/24/05			AK-SATA-PC015	
Check			App'd	
Engr			Scale NONE	Units m/m
			Third Angle Projection	⊕
			Dwg No. 150-0328	REV: B Sheet 1/1