

## TC74VHC14F, TC74VHC14FN, TC74VHC14FT, TC74VHC14FK

### Hex Schmitt Inverter

The TC74VHC14 is an advanced high speed CMOS SCHMITT INVERTER fabricated with silicon gate C<sup>2</sup>MOS technology.

It achieves the high speed operation similar to equivalent Bipolar Schottky TTL while maintaining the CMOS low power dissipation.

Pin configuration and function are the same as the TC74VHC04 but the inputs have hysteresis and with its schmitt trigger function, the TC74VHC14 can be used as a line receivers which will receive slow input signals.


An input protection circuit ensures that 0 to 5.5 V can be applied to the input pins without regard to the supply voltage. This device can be used to interface 5 V to 3 V systems and two supply systems such as battery back up. This circuit prevents device destruction due to mismatched supply and input voltages.

### Features


- High speed:  $t_{pd} = 5.5 \text{ ns (typ.)}$  at  $V_{CC} = 5 \text{ V}$
- Low power dissipation:  $I_{CC} = 2 \mu\text{A (max)}$  at  $T_a = 25^\circ\text{C}$
- Power down protection is provided on all inputs.
- Balanced propagation delays:  $t_{pLH} \approx t_{pHL}$
- Wide operating voltage range:  $V_{CC (opr)} = 2 \text{ V to } 5.5 \text{ V}$
- Low noise:  $V_{OLP} = 0.8 \text{ V (max)}$
- Pin and function compatible with 74ALS14

Note: xxxFN (JEDEC SOP) is not available in Japan.

TC74VHC14F




SOP14-P-300-1.27A




SOP14-P-300-1.27

TC74VHC14FN




SOL14-P-150-1.27

TC74VHC14FT



TSSOP14-P-0044-0.65A


TC74VHC14FK




VSSOP14-P-0030-0.50

|                      |   |               |
|----------------------|---|---------------|
| Weight               |   |               |
| SOP14-P-300-1.27A    | : | 0.18 g (typ.) |
| SOP14-P-300-1.27     | : | 0.18 g (typ.) |
| SOL14-P-150-1.27     | : | 0.12 g (typ.) |
| TSSOP14-P-0044-0.65A | : | 0.06 g (typ.) |
| VSSOP14-P-0030-0.50  | : | 0.02 g (typ.) |

## Pin Assignment

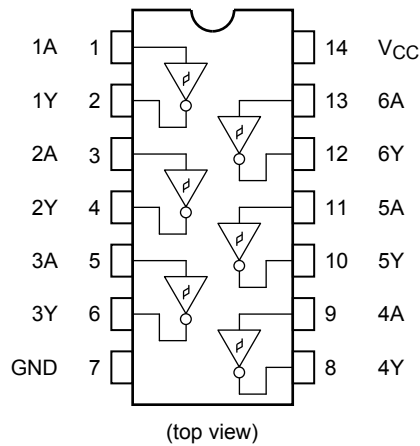


## IEC Logic Symbol

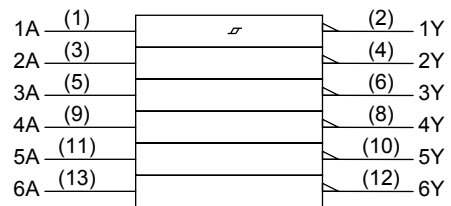

## Truth Table

| A | Y |
|---|---|
| L | H |
| H | L |

## System Diagram, Waveform

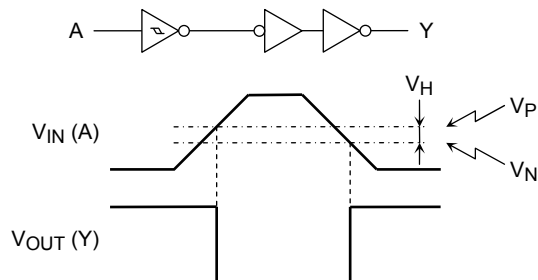

## Absolute Maximum Ratings (Note)

| Characteristics             | Symbol    | Rating                 | Unit        |
|-----------------------------|-----------|------------------------|-------------|
| Supply voltage range        | $V_{CC}$  | -0.5 to 7.0            | V           |
| DC input voltage            | $V_{IN}$  | -0.5 to 7.0            | V           |
| DC output voltage           | $V_{OUT}$ | -0.5 to $V_{CC} + 0.5$ | V           |
| Input diode current         | $I_{IK}$  | -20                    | mA          |
| Output diode current        | $I_{OK}$  | $\pm 20$               | mA          |
| DC output current           | $I_{OUT}$ | $\pm 25$               | mA          |
| DC $V_{CC}$ /ground current | $I_{CC}$  | $\pm 50$               | mA          |
| Power dissipation           | $P_D$     | 180                    | mW          |
| Storage temperature         | $T_{stg}$ | -65 to 150             | $^{\circ}C$ |

Note: Exceeding any of the absolute maximum ratings, even briefly, lead to deterioration in IC performance or even destruction.

## Recommended Operating Conditions (Note)

| Characteristics       | Symbol    | Rating        | Unit |
|-----------------------|-----------|---------------|------|
| Supply voltage        | $V_{CC}$  | 2.0 to 5.5    | V    |
| Input voltage         | $V_{IN}$  | 0 to 5.5      | V    |
| Output voltage        | $V_{OUT}$ | 0 to $V_{CC}$ | V    |
| Operating temperature | $T_{opr}$ | -40 to 85     | °C   |

Note: The recommended operating conditions are required to ensure the normal operation of the device. Unused inputs must be tied to either  $V_{CC}$  or GND.

## Electrical Characteristics

### DC Characteristics

| Characteristics            | Symbol   | Test Condition                   | $V_{CC}$<br>(V)            | $T_a = 25^\circ\text{C}$ |      |           | $T_a = -40 \text{ to } 85^\circ\text{C}$ |           | Unit          |   |      |
|----------------------------|----------|----------------------------------|----------------------------|--------------------------|------|-----------|--|-----------|---------------|---|------|
|                            |          |                                  |                            | Min                      | Typ. | Max       | Min                                      | Max       |               |   |      |
| Positive threshold voltage | $V_P$    | —                                | 3.0                        | —                        | —    | 2.20      | —  | 2.20      | V             |   |      |
|                            |          |                                  | 4.5                        | —                        | —    | 3.15      | —  | 3.15      |               |   |      |
|                            |          |                                  | 5.5                        | —                        | —    | 3.85      | —  | 3.85      |               |   |      |
| Negative threshold voltage | $V_N$    | —                                | 3.0                        | 0.90                     | —    | —         | 0.90                                     | —         | V             |   |      |
|                            |          |                                  | 4.5                        | 1.35                     | —    | —         | 1.35                                     | —         |               |   |      |
|                            |          |                                  | 5.5                        | 1.65                     | —    | —         | 1.65                                     | —         |               |   |      |
| Hysteresis voltage         | $V_H$    | —                                | 3.0                        | 0.30                     | —    | 1.20      | 0.30                                     | 1.20      | V             |   |      |
|                            |          |                                  | 4.5                        | 0.40                     | —    | 1.40      | 0.40                                     | 1.40      |               |   |      |
|                            |          |                                  | 5.5                        | 0.50                     | —    | 1.60      | 0.50                                     | 1.60      |               |   |      |
| High-level output voltage  | $V_{OH}$ | $V_{IN} = V_{IL}$                | $I_{OH} = -50 \mu\text{A}$ |                          | 2.0  | 1.9       | 2.0                                      | —         | 1.9           | V |      |
|                            |          |                                  | $I_{OH} = -4 \text{ mA}$   |                          | 3.0  | 2.9       | 3.0                                      | —         | 2.9           |   |      |
|                            |          |                                  | $I_{OH} = -8 \text{ mA}$   |                          | 4.5  | 4.4       | 4.5                                      | —         | 4.4           |   |      |
|                            |          |                                  | $I_{OH} = -8 \text{ mA}$   |                          | 3.0  | 2.58      | —  | —         | 2.48          |   | —    |
| Low-level output voltage   | $V_{OL}$ | $V_{IN} = V_{IH}$                | $I_{OL} = 50 \mu\text{A}$  |                          | 2.0  | —         | 0.0                                      | 0.1       | —             | V |      |
|                            |          |                                  | $I_{OL} = 4 \text{ mA}$    |                          | 3.0  | —         | —  | 0.36      | —             |   | 0.44 |
|                            |          |                                  | $I_{OL} = 8 \text{ mA}$    |                          | 4.5  | —         | —  | 0.36      | —             |   | 0.44 |
|                            |          |                                  | $I_{OL} = 8 \text{ mA}$    |                          | 3.0  | —         | —  | 0.36      | —             |   | 0.44 |
| Input leakage current      | $I_{IN}$ | $V_{IN} = 5.5 \text{ V or GND}$  | 0 to 5.5                   | —                        | —    | $\pm 0.1$ | —  | $\pm 1.0$ | $\mu\text{A}$ |   |      |
| Quiescent supply current   | $I_{CC}$ | $V_{IN} = V_{CC} \text{ or GND}$ | 5.5                        | —                        | —    | 2.0       | —  | 20.0      | $\mu\text{A}$ |   |      |

## AC Characteristics (input: $t_r = t_f = 3 \text{ ns}$ )

| Characteristics               | Symbol           | Test Condition | Ta = 25°C           |                     |     | Ta = -40 to 85°C |      | Unit |      |     |
|-------------------------------|------------------|----------------|---------------------|---------------------|-----|------------------|------|------|------|-----|
|                               |                  |                | V <sub>CC</sub> (V) | C <sub>L</sub> (pF) | Min | Typ.             | Max  |      | Min  | Max |
| Propagation delay time        | t <sub>pLH</sub> | —              | 3.3 ± 0.3           | 15                  | —   | 8.3              | 12.8 | 1.0  | 15.0 | ns  |
|                               |                  |                |                     | 50                  | —   | 10.8             | 16.3 | 1.0  | 18.5 |     |
|                               | 5.0 ± 0.5        |                | 15                  | —                   | 5.5 | 8.6              | 1.0  | 10.0 |      |     |
|                               |                  |                | 50                  | —                   | 7.0 | 10.6             | 1.0  | 12.0 |      |     |
| Input capacitance             | C <sub>IN</sub>  | —              | —                   | 4                   | 10  | —                | 10   | pF   |      |     |
| Power dissipation capacitance | C <sub>PD</sub>  | (Note)         | —                   | 21                  | —   | —                | —    | pF   |      |     |

Note: C<sub>PD</sub> is defined as the value of the internal equivalent capacitance which is calculated from the operating current consumption without load.


Average operating current can be obtained by the equation:

$$I_{CC(\text{opr})} = C_{PD} \cdot V_{CC} \cdot f_{IN} + I_{CC}/6 \text{ (per gate)}$$

## Noise Characteristics (input: $t_r = t_f = 3 \text{ ns}$ )

| Characteristics                              | Symbol           | Test Condition         | Ta = 25°C           |      |       | Unit |
|--|------------------|------------------------|---------------------|------|-------|------|
|  |                  |                        | V <sub>CC</sub> (V) | Typ. | Limit |      |
| Quiet output maximum dynamic V <sub>OL</sub> | V <sub>OLP</sub> | C <sub>L</sub> = 50 pF | 5.0                 | 0.4  | 0.8   | V    |
| Quiet output minimum dynamic V <sub>OL</sub> | V <sub>OLV</sub> | C <sub>L</sub> = 50 pF | 5.0                 | -0.4 | -0.8  | V    |
| Minimum high level dynamic input voltage     | V <sub>IHD</sub> | C <sub>L</sub> = 50 pF | 5.0                 | —    | 3.5   | V    |
| Maximum low level dynamic input voltage      | V <sub>ILD</sub> | C <sub>L</sub> = 50 pF | 5.0                 | —    | 1.5   | V    |

## Input Equivalent Circuit

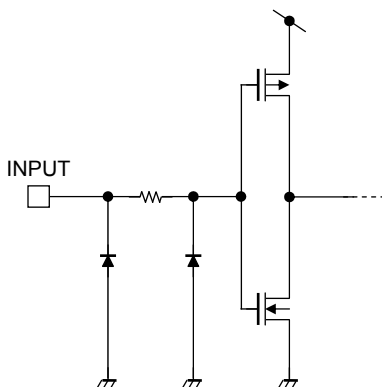

## Package Dimensions

SOP14-P-300-1.27A

Unit: mm







Weight: 0.18 g (typ.)

**Package Dimensions**

SOP14-P-300-1.27

Unit : mm

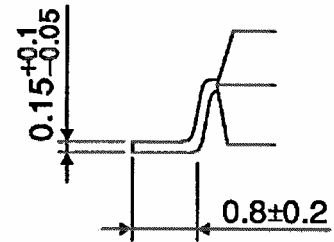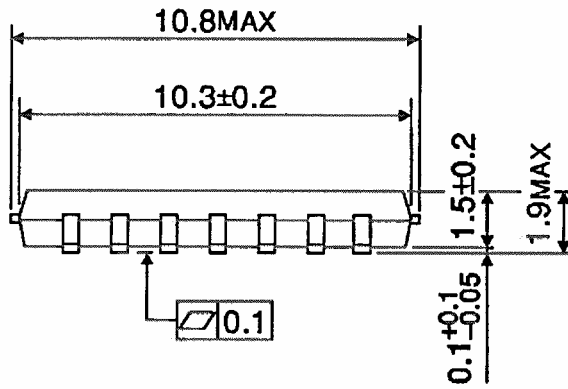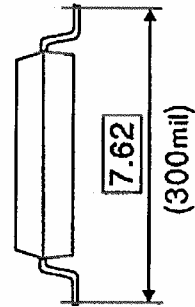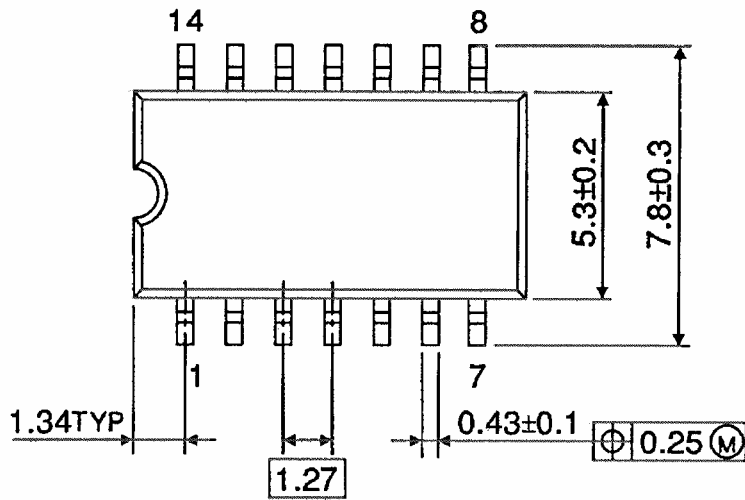

Weight: 0.18 g (typ.)

Package Dimensions (Note)

SOL14-P-150-1.27

Unit : mm



Note: This package is not available in Japan.

Weight: 0.12 g (typ.)

**Package Dimensions**

TSSOP14-P-0044-0.65A

Unit: mm




Weight: 0.06 g (typ.)



**Package Dimensions**

VSSOP14-P-0030-0.50

Unit: mm

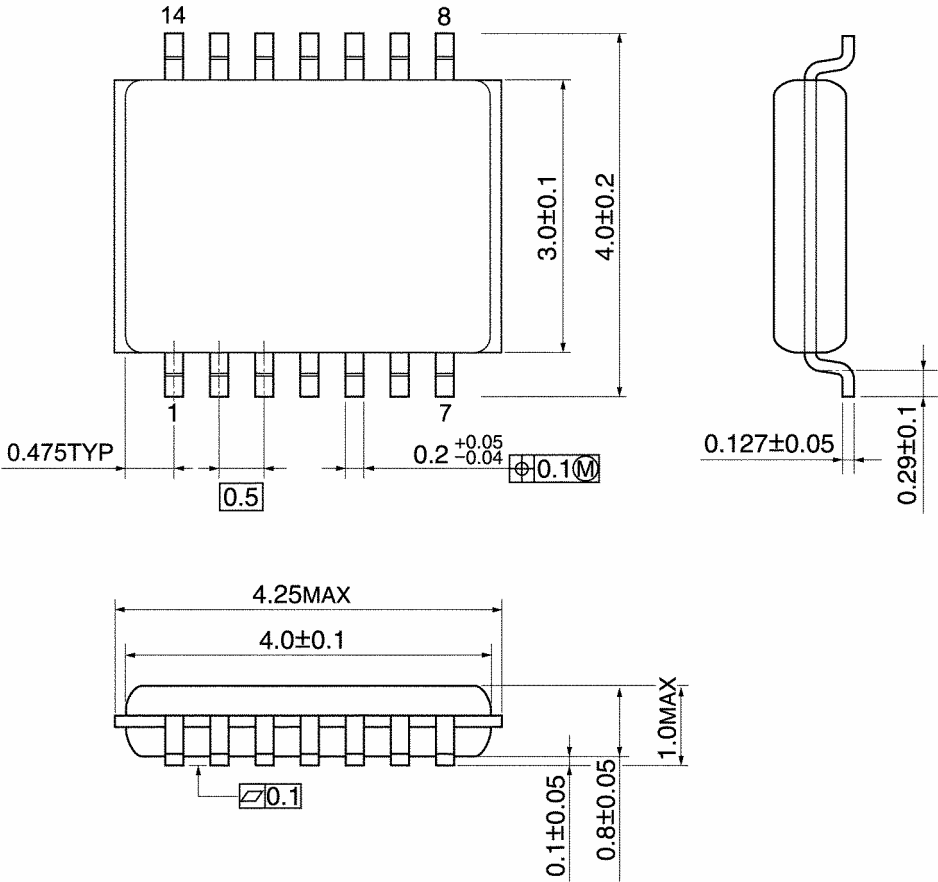

Weight: 0.02 g (typ.)

**Note: Lead (Pb)-Free Packages****SOP14-P-300-1.27A SOL14-P-150-1.27 TSSOP14-P-0044-0.65A VSSOP14-P-0030-0.50****RESTRICTIONS ON PRODUCT USE**

20070701-EN

- The information contained herein is subject to change without notice.
- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.  
In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc.
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The products described in this document shall not be used or embedded to any downstream products of which manufacture, use and/or sale are prohibited under any applicable laws and regulations.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patents or other rights of TOSHIBA or the third parties.
- Please contact your sales representative for product-by-product details in this document regarding RoHS compatibility. Please use these products in this document in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances. Toshiba assumes no liability for damage or losses occurring as a result of noncompliance with applicable laws and regulations.