


# Models 72926 IEC Insulated BNC Male 50 ohm Cable



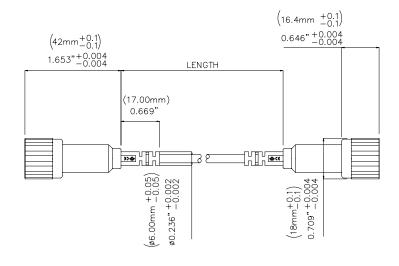

### **Features**

• IEC Insulated BNC Male to BNC Male 50 ohm cable.

#### **Materials**

Connector body: Nickel plated BrassCenter Contact: Gold Plated Brass

• Dielectric: White PTFE

## **Ordering Information**

Model: 72926-C-Length

Available Lengths: 40 inches (-40) or 80 inches (-80)

## **Specifications**

Max Current	3 A Max
Max Voltage	500 V CAT I 150 V CAT III
Cable	50 Ω

**USA:** Sales: 800-490-2361 Technical Support: 800-241-

2060 Fax: 888-403-3360

**Europe:** 31-(0) 40 2675 150 **International**: 425-446-5500

e-mail: technicalsupport@pomonatest.com

Where to Buy: www.pomonaelectronics.com

All dimensions are in inches. Tolerances (except noted):  $.xx = \pm .02$ " (,51 mm),  $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.