
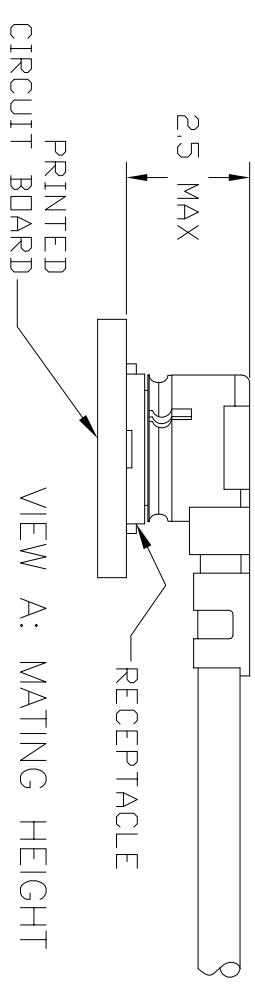


LOC	DIST	REV	DATE	BY	APP'D
HT	OO	P	29APR05	HXF	DF
		0			

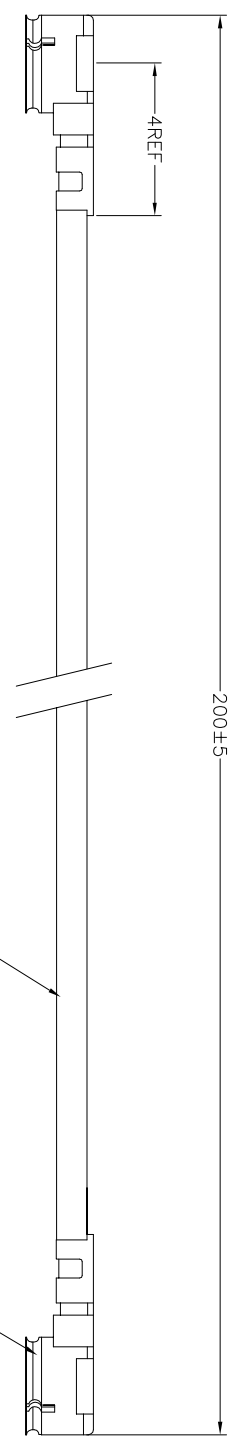

- NOTES:
- HIROSE COMPATIBLE, 2.5MM MATING HEIGHT.
  - 100% ELECTRICAL TESTING FOR CONTINUITY AND SHORTS. HI-POT AT 150 VDC FOR 100ms  
FREQUENCY RANGE: DC TO 6 GHz  
VSWR 1.4:1 MAX
  - PRODUCT RATINGS:  
TEMPERATURE: -40 TO +90 DEG.C  
VOLTAGE: 60 VAC  
CHARACTERISTIC IMPEDANCE: 50 OHMS  
MATING DURABILITY: 30 CYCLES

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIM	QTY	UNIT	DESCRIPTION	ITEM
AR	2	MM	MINIATURE COAXIAL CABLE, 0.80 mm OD	2
PC	1	PC	UMCC TYPE III PLUG	1

APVD	APVD	APVD
29APR05	29APR05	29APR05
Hao Xiangfeng	Fouli Zhou	WILSON
29APR05	29APR05	29APR05

0 PLG	±
1 PLG	±
2 PLG	±
3 PLG	±
4 PLG	±
ANGLES	±
FINISH	±

**tyco**  
**Electronics**

Tyco Electronics Corporation  
KunShan, CHINA 215321

CABLE ASSEMBLY, UMCC TYPE III PLUGS  
ON 0.80mm CABLE

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A4	00779	1750107-2	-