



DESCRIPTION	DATE	DWN	APP'D
	28APR05	HXF	DF

200mm

20mm REF

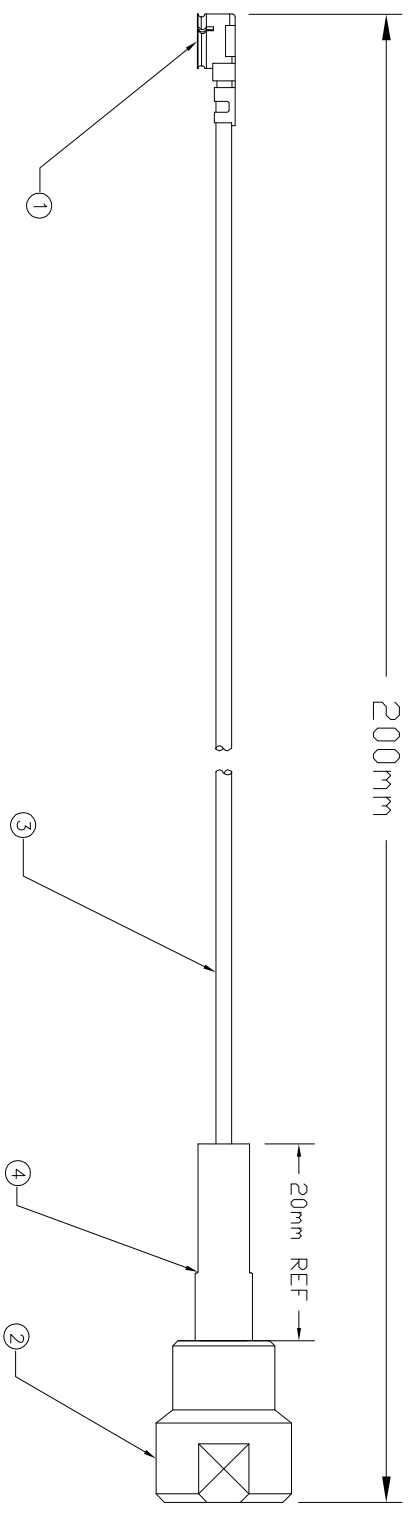

2.5 MAX

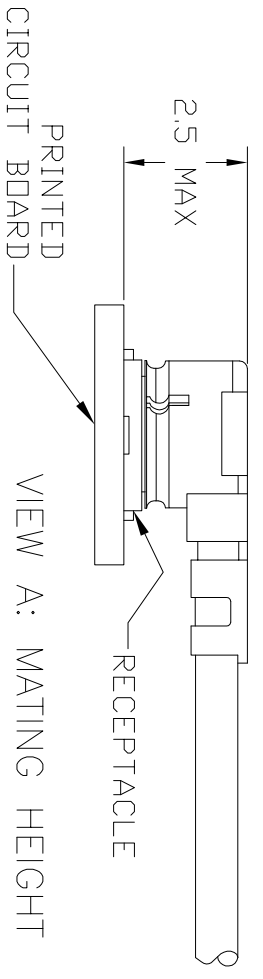

- NOTES:
1. HIROSE COMPATIBLE
 2. 100% ELECTRICAL TESTING FOR: CONTINUITY AND SHORTS, HI-POT AT 150 VDC FOR 100ms FREQUENCY RANGE: DC TO 2 GHz VSWR 1.3:1 MAX
 3. PRODUCT RATINGS:
 TEMPERATURE: -40 TO +90 DEG.C
 VOLTAGE: 60 VAC
 CHARACTERISTIC IMPEDANCE: 50 OHMS
 UMCC MATING DURABILITY: 30 CYCLES
 FME MATING DURABILITY: 500 CYCLES

QTY	UNIT	DESCRIPTION	ITEM
1	PC	TUBING, HEAT SHRINK	4
1	MM	MINIATURE COAX CABLE, 1.37mm OD	3
1	PC	FME PLUG FOR 1.37 OD CABLE	2
1	PC	UMCC TYPE III PLUG	1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: MM	TOLERANCES UNLESS OTHERWISE SPECIFIED:
0. PLC	±
1. PLC	±
2. PLC	±
3. PLC	±
4. PLC	±
ANGLES	±
FINISH	-

DWN	APP'D	PRODUCT SPEC	APPLICATION SPEC	WEIGHT
Hao, Xiangfeng	DENVER WILSON			
28APR05	13JUN05			
Chk: Paul Zhou				

tyco
Electronics
 Tyco Electronics Corporation
 KunShan, CHINA 215321

CABLE ASSY, UMCC TYPE III PLUG TO FME PLUG ON 1.37mm CABL

SIZE	DWG CODE	DRAWING NO	RESTRICTED TO
A4	00779	1750110-2	