
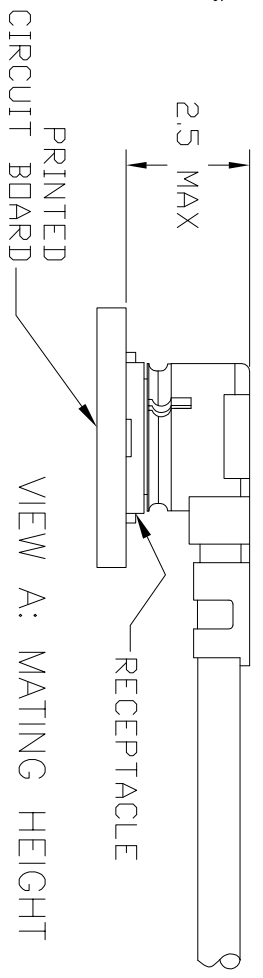


DATE	DWN	APP'D
28APR05	HXF	DF

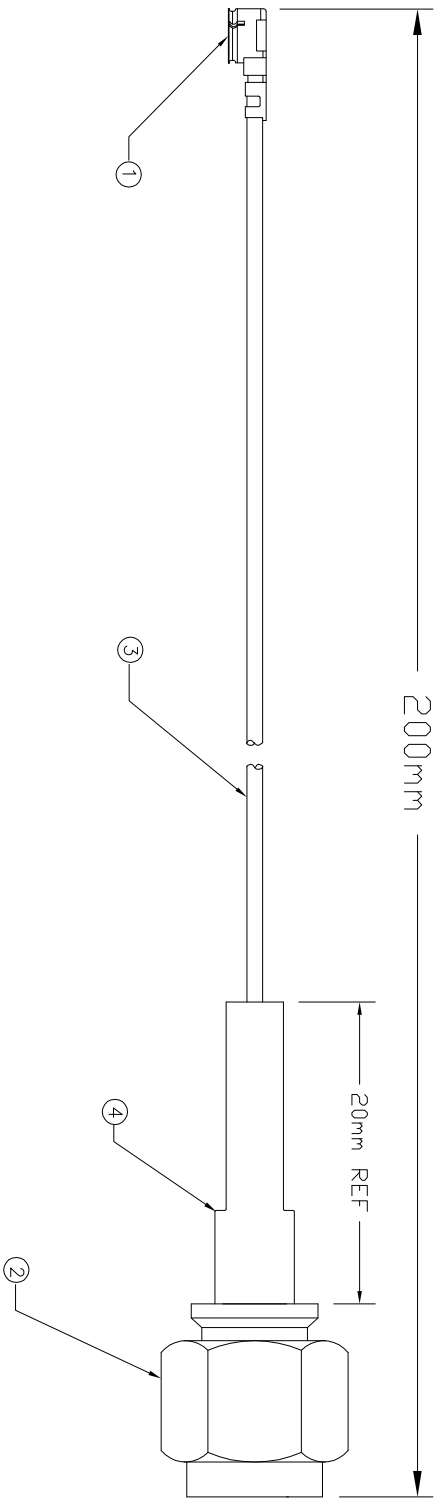

- NOTES:
- HIROSE COMPATIBLE
  - 100% ELECTRICAL TESTING FOR: CONTINUITY AND SHORTS, HI-POT AT 150 VDC FOR 100ms  
 FREQUENCY RANGE: DC TO 6 GHz  
 VSWR 1.4:1 MAX
  - PRODUCT RATINGS:  
 TEMPERATURE: -40 TO +90 DEG.C  
 VOLTAGE: 60 VAC  
 CHARACTERISTIC IMPEDANCE: 50 OHMS  
 UMCC MATING DURABILITY: 30 CYCLES  
 SMA MATING DURABILITY: 500 CYCLES

QTY	UNIT	DESCRIPTION	ITEM
1	PC	TUBING, HEAT SHRINK	4
1	MM	MINIATURE COAX CABLE, 1.37mm OD	3
1	PC	SMA PLUG FOR 1.37 OD CABLE	2
1	PC	UMCC TYPE III PLUG	1

THIS DRAWING IS A CONTROLLED DOCUMENT.  
 DIMENSIONS: MM  
 TOLERANCES UNLESS OTHERWISE SPECIFIED:  
 0. PLC ±  
 1. PLC ±  
 2. PLC ±  
 3. PLC ±  
 4. PLC ±  
 ANGLES ±  
 FINISH ±

DWN Hao Xiangfeng 28APR05  
 CHK Paul Zhou 13JUN05  
 APP'D DENVER WILSON  
 PRODUCT SPEC  
 APPLICATION SPEC  
 WEIGHT  
 MATERIAL

tyco Electronics  
 Tyco Electronics Corporation  
 KunShan, CHINA 215321  
 NAME  
 CABLE ASSY, UMCC TYPE III PLUG TO  
 SMA PLUG ON 1.37mm CABLE

SIZE A4  
 DATE CODE 00779  
 DRAWING NO. 1750110-4  
 SCALE 1:1  
 SHEET 1 OF 1  
 REV 0  
 RESTRICTED TO