
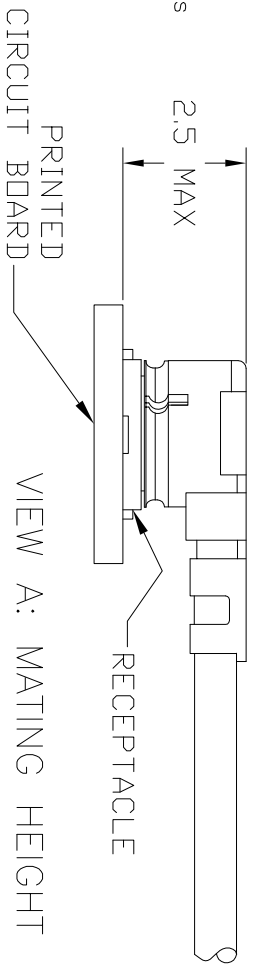


REVISIONS	
DESCRIPTION	DATE

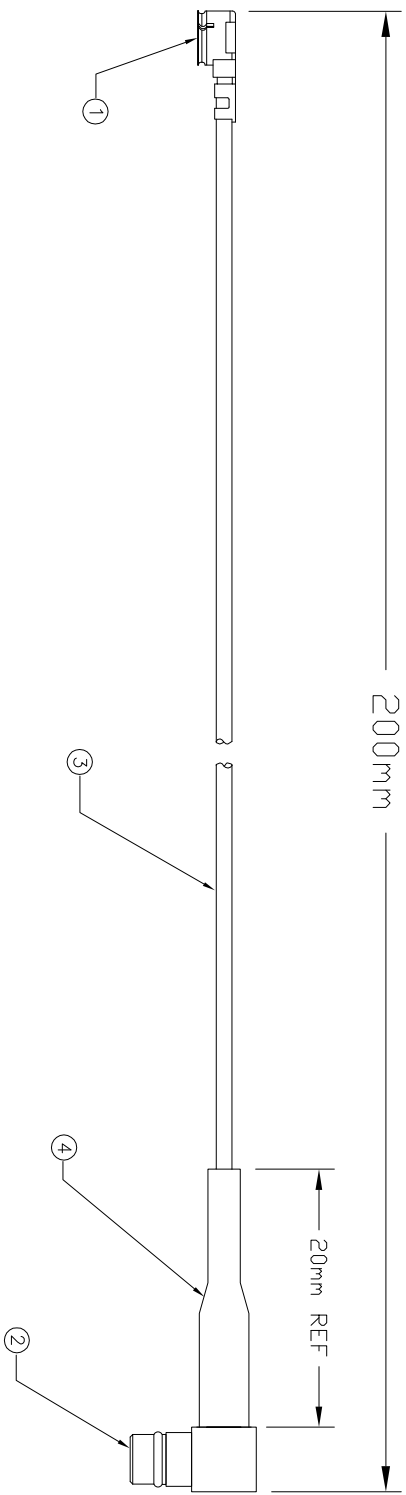

- NOTES:
1. HIROSE COMPATIBLE
 2. 100% ELECTRICAL TESTING FOR: CONTINUITY AND SHORTS. HI-POT AT 150 VDC FOR 100ms
FREQUENCY RANGE: DC TO 6 GHz
VSWR 1.4:1 MAX
 3. PRODUCT RATINGS:
TEMPERATURE: -40 TO +90 DEG.C
VOLTAGE: 60 VAC
CHARACTERISTIC IMPEDANCE: 50 OHMS
UMCC MATING DURABILITY: 50 CYCLES
MMCX MATING DURABILITY: 500 CYCLES

QTY	UNIT	DESCRIPTION	ITEM
1	PC	TUBING, HEAT SHRINK	4
1	MM	MINIATURE COAX CABLE, 1.37mm OD	3
1	PC	MMCX R/A PLUG FOR 1.37 OD CABLE	2
1	PC	UMCC TYPE III PLUG	1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN: Hao, Xiangfeng
 CHK: Paul Zhou
 APVD: DENVER WILSON
 PRODUCT SPEC: 13JUN05
 NAME: **tyco** Electronics
 Tyco Electronics Corporation
 KunShan, CHINA 215321

DIMENSIONS: MM

TOLERANCES UNLESS OTHERWISE SPECIFIED:	FINISH
0 PLC	
1 PLC	±
2 PLC	±
3 PLC	±
4 PLC	±
ANGLES	±

APPLICATION SPEC: ---
 WEIGHT: ---

SIZE: A4
 CAGE CODE: 00779
 DRAWING NO: 1-1750110-0
 SCALE: 1:1
 SHEET: 1 of 1
 RESTRICTED TO: ---