



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION .19
 (C) COPYRIGHT 19 BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD		
0		PPR PER 97-7927-029-01	1/18/98	SSG	SS		
	A	REV PER 0520-0037-99	8/25/99	JCB	FM		

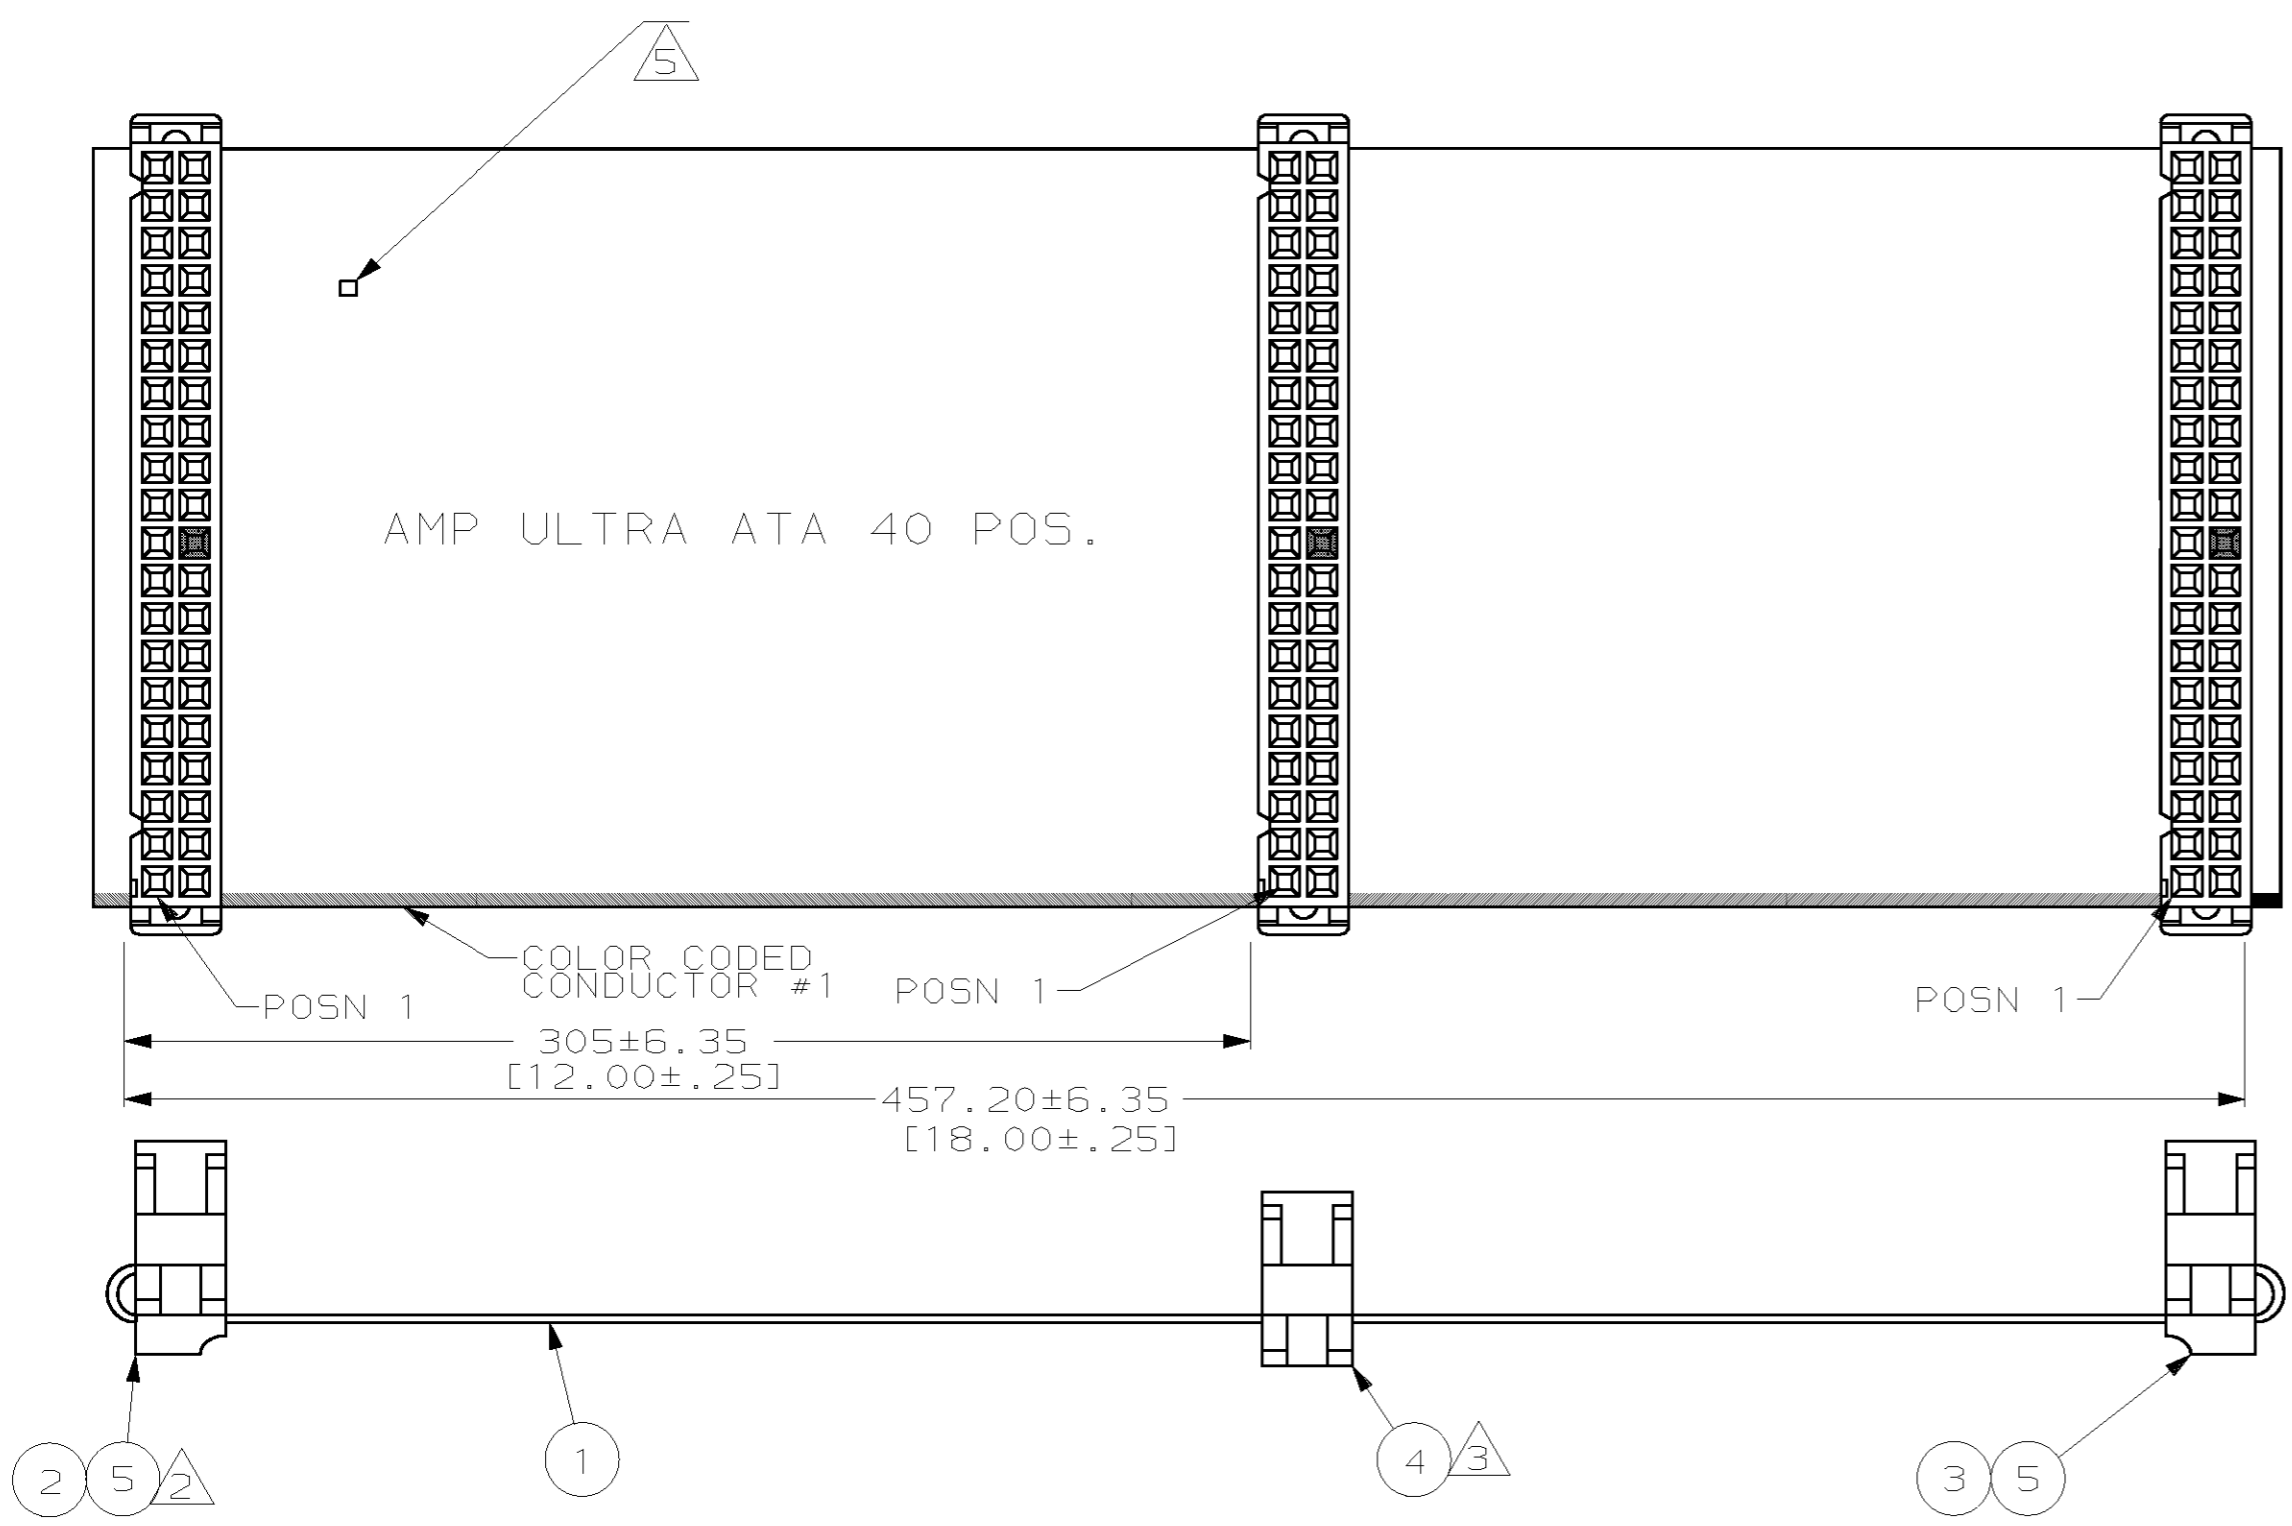

- CONNECTOR POSITIONS 2, 19, 22, 24, 26, 30, & 40 GROUNDED REF.
- POSITION 34 GROUNDED, REF.
- POSITION 28 OPEN, REF.
- MOLDED IN KEY PLUG AT POSN 20, ALL CONNECTIONS, REF.
- CABLE CONDUCTOR 68, CONNECTOR POSITION 34 PUNCHED OUT AT MOTHER BOARD END OF CABLE.

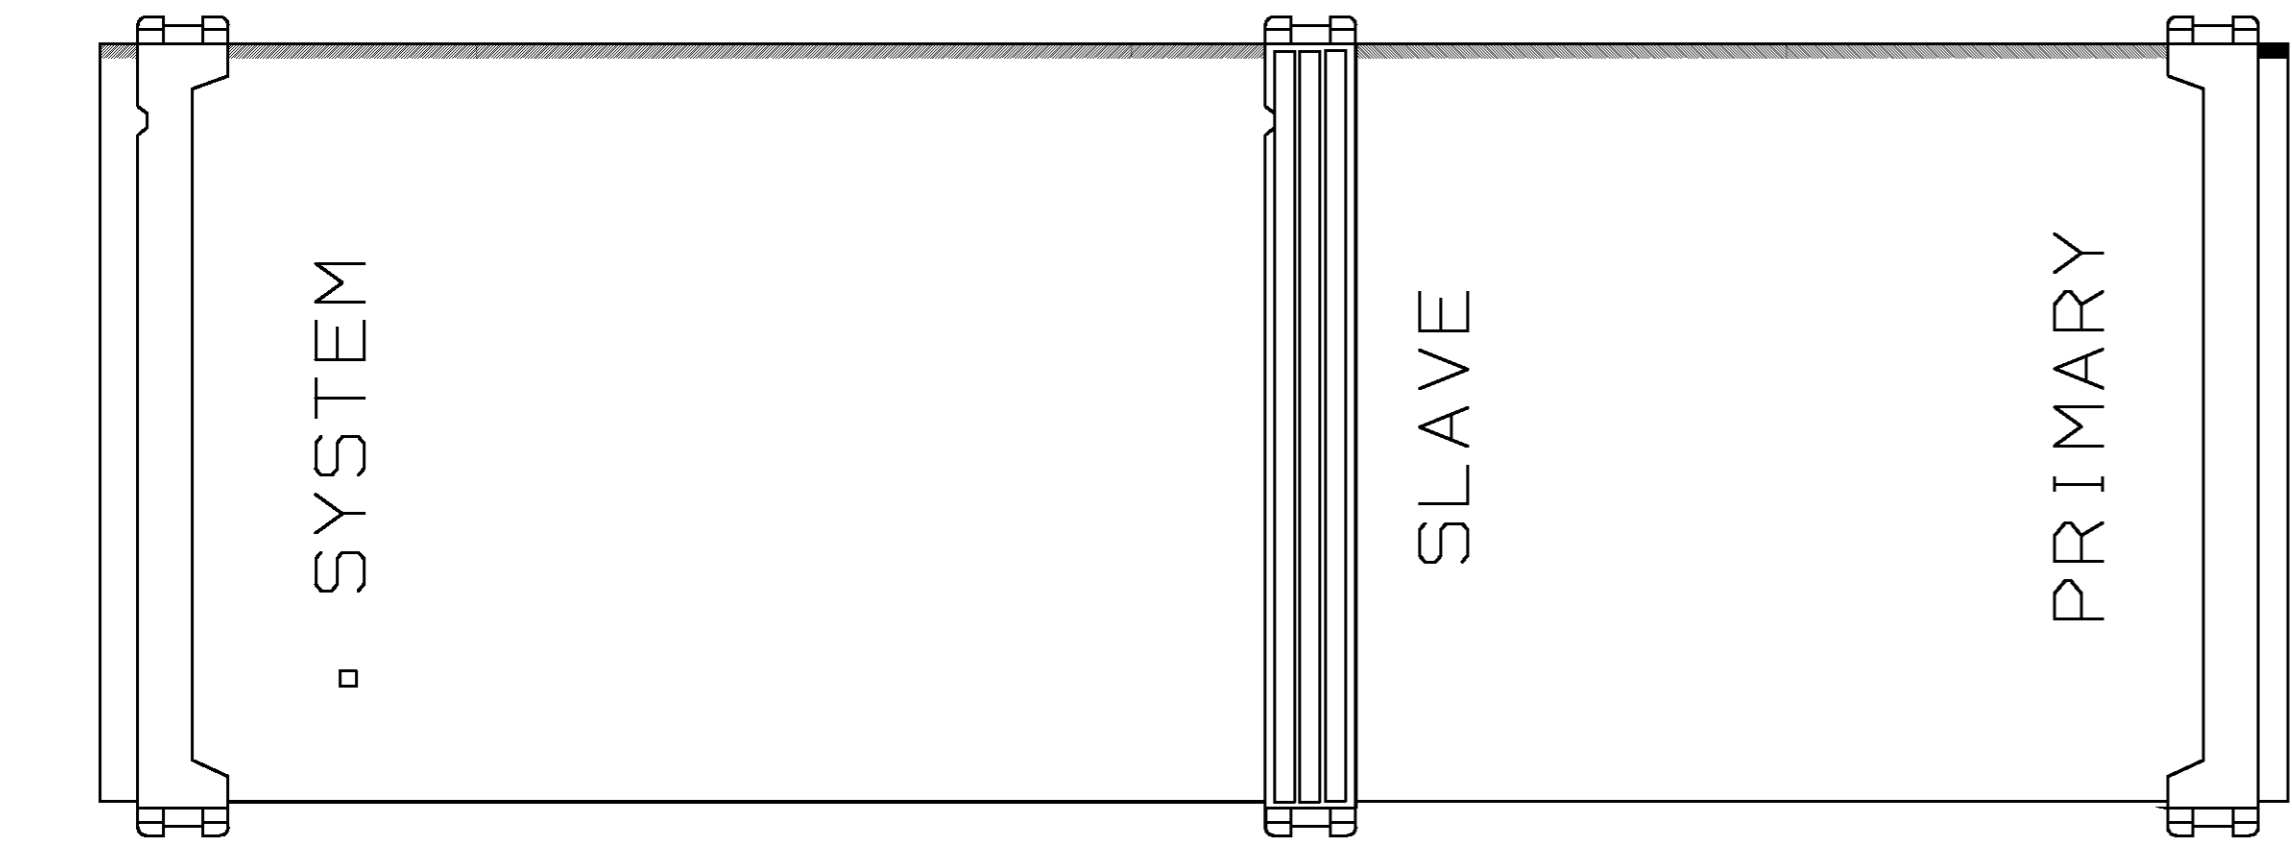

QTY	PC	DESCRIPTION	ITEM NO.
1	PC	STRAIN RELIEF	5
1	PC	RECPT ASSY 40 POS, (SLAVE) GREY	4
1	PC	RECPT ASSY, 40 POS (PRIMARY) BLACK	3
1	PC	RECPT ASSY, 40 POS (SYSTEM BOARD) BLUE	2
A/R	IN	80 CABLE COND, .025¢, 30 AWG, SOLID RBN	1
-1	U/M	DESCRIPTION	ITEM NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S.S. GOULDEN 1/15/98	AMP Incorporated	
DIMENSIONS: MM [INCHES]		CHK S. SHORTZ 3/12/98	Harrisburg, PA 17105-3608	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD T. BARNES 3/12/98	NAME	
0 PLC ±		PRODUCT SPEC		
1 PLC ±		CABLE ASSY 40 POS ULTRA ATA		
2 PLC ±		APPLICATION SPEC		
3 PLC ±		SIZE A2	CAGE CODE 00779	DRAWING NO 319965
4 PLC ±		RESTRICTED TO		
ANGLES ±		CUSTOMER DRAWING		
FINISH -		SCALE N/A	SHEET 1 OF 1	REV A