


LOW QUIESCENT CURRENT VOLTAGE REGULATOR

- ADJUSTABLE OUTPUT VOLTAGE FROM 0.8V to $V_I - V_d$
- INTERNAL REFERENCE VOLTAGE ACCURACY $\pm 2\%$ AT 25°C
- OUTPUT CURRENT CAPABILITY: 1A MINIMUM
- VERY LOW QUIESCENT CURRENT: MAX 3mA OVER TEMPERATURE RANGE
- MAXIMUM DROPOUT 1V (@ $I_O=1A$)
- STABLE ONLY WITH LOW ESR CERAMIC CAPACITORS
- THERMAL SHUTDOWN PROTECTION WITH HYSTERESIS
- OVER CURRENT PROTECTION
- OPERATING JUNCTION TEMPERATURE RANGE: FROM 0 TO 125°C

DESCRIPTION

The ST1L04 is a low drop adjustable linear voltage regulator capable to supply up to 1A output current.

The output voltage can be as low as 0.8V. The quiescent current is well controlled and maintained below 3mA over the whole allowed

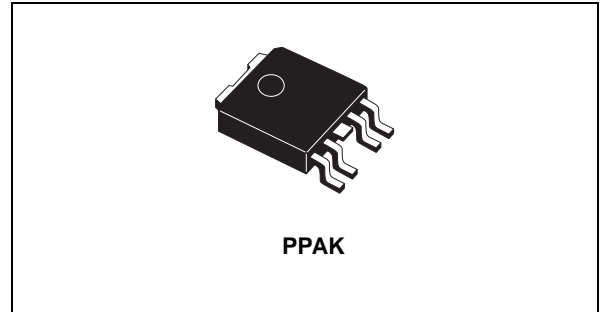

junction temperature range. The ST1L04 is stable only with low ESR output ceramic capacitors. Internal protection circuitry includes thermal protection with hysteresis and over current limiting.

The ST1L04 is especially suitable for applications requiring low voltage outputs from low voltage inputs. Typical application for this product are, notebook PCs, low voltage ASIC, VID power supplies and low cost post regulation for 3.3V output voltage switching regulators.

Figure 1: Schematic Diagram

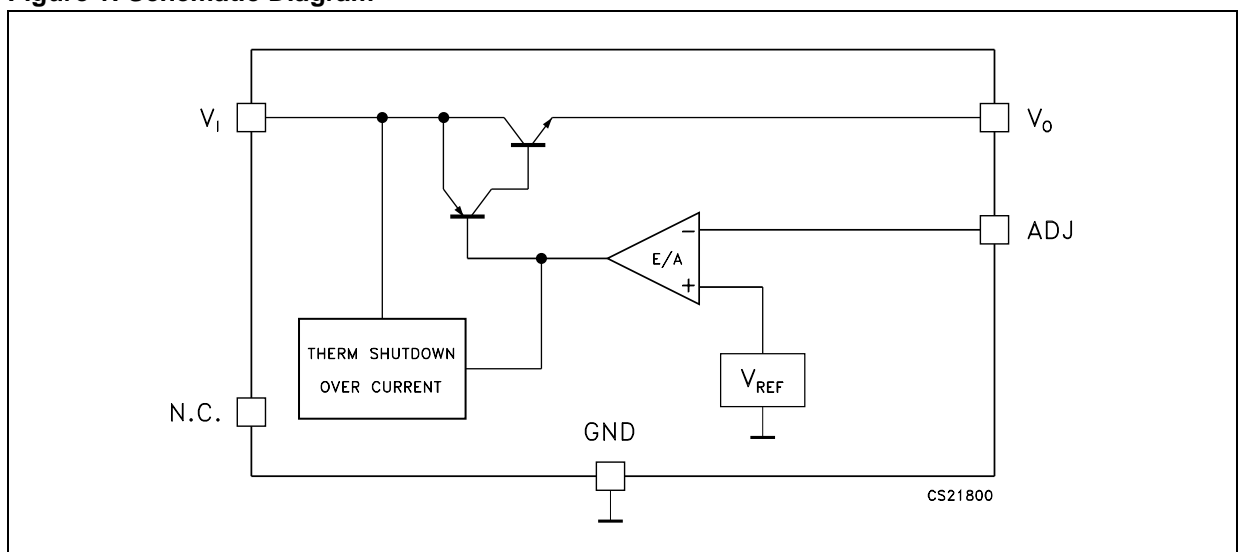


Table 1: Order Codes

| TYPE | PPAK |
|--------|----------|
| ST1L04 | ST1L04PT |

Figure 2: Pin Connection (top view)

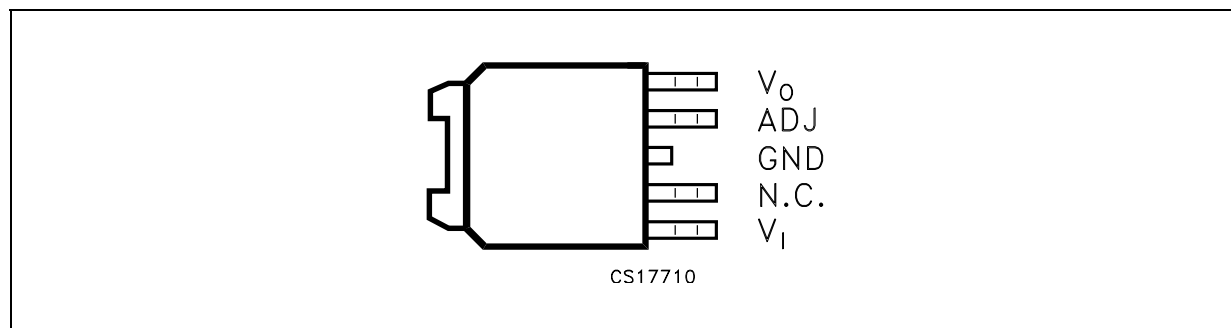


Table 2: Pin Description

| PIN N° | NAME | FUNCTION |
|--------|----------------|--|
| 1 | V _I | Supply voltage input pin. Bypass with a ceramic capacitor to GND |
| 2 | N.C. | Not connected. |
| 3 | GND | Ground. The exposed metallic pad of the package is connected to GND. |
| 4 | ADJ | Adjust voltage pin. External resistor divider connection. |
| 5 | V _O | Output voltage pin. Bypass with a ceramic capacitor to GND |

Table 3: Absolute Maximum Ratings


| Symbol | Parameter | Value | Unit |
|------------------|--------------------------------------|--------------------|------|
| V _I | DC Supply Voltage | from GND-0.3 to 10 | V |
| P _{tot} | Power Dissipation | internally limited | W |
| I _O | Output Current | internally limited | A |
| T _{op} | Operating Junction Temperature Range | 0 to +125 | °C |
| T _{stg} | Storage Temperature Range | -40 to +150 | °C |

Absolute Maximum Ratings are those values beyond which damage to the device may occur. Functional operation under these condition is not implied.

Table 4: Thermal Data

| Symbol | Parameter | PPAK | Unit |
|-----------------------|-------------------------------------|------|------|
| R _{thj-case} | Thermal Resistance Junction-case | 8 | °C/W |
| R _{thj-amb} | Thermal Resistance Junction-ambient | 100 | °C/W |

Figure 3: Typical Application Schematic

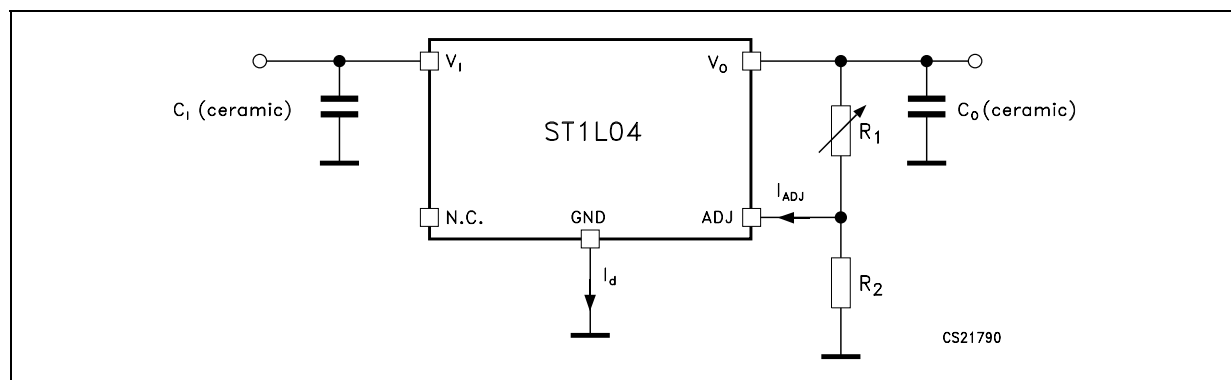

NOTE: The adjustable output voltage is set by a resistor divider connected between V_O and GND with its centre tap connected to ADJ. The voltage divider resistor are: R1 connected between V_O and ADJ and R2 connected between ADJ and GND. V_O is determined by V_{REF} , R1, R2, I_{ADJ} , as follows:

$$V_O = V_{REF}(1 + R1/R2) + I_{ADJ}R1$$

Since I_{ADJ} is very small and stable it can be ignored and the output voltage can be simply calculated as follows:

$$V_O = V_{REF}(1 + R1/R2)$$

Table 5: Electrical Characteristics (refer to the typical application schematic, V_{IN} =from 2.9 to 5.5V, I_O = from 10mA to 1A, C_{IN} =4.7 μ F, C_{OUT} =4.7 μ F, T_j = 0 to 125 $^{\circ}$ C, unless otherwise specified). Typical values are intended at T_j =25 $^{\circ}$ C unless otherwise specified

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|------------------|--|---|---------------------|-------|-------|--------------------|
| V_I | Operating Input Voltage | | 2.8 | | | V |
| I_d | Quiescent Current | | | | 3 | mA |
| V_{REF} | Reference Voltage | $T_j = 25^{\circ}\text{C}$ | 0.784 | 0.8 | 0.816 | V |
| | | | 0.776 | 0.8 | 0.824 | |
| ΔV_O | Line Regulation | $I_O = 10\text{mA}$ | | | 0.8 | % |
| ΔV_O | Load Regulation | $V_I = 3.3\text{V}$ | | | 0.8 | % |
| I_{ADJ} | Adjustment Current | $I_O = 10\text{mA}$ | | | 1 | μA |
| $I_{\Delta ADJ}$ | Adjustment Current change | | | | 200 | nA |
| I_{Omin} | Minimum Output Current for regulation | | | | 100 | μA |
| I_O | Output Current Limit | | 1 | | 1.4 | A |
| V_d | Dropout Voltage (see note 1 and note 2) | $I_O = 1\text{A}$, $V_O = \text{from } 1.8 \text{ to } 3.3\text{V}$ | | | 1 | V |
| SVR | Supply Voltage Rejection (see note 2) | $V_I = 3.3 \pm 0.5\text{V}$, $I_O = 10\text{mA}$, $T_j = 25^{\circ}\text{C}$ | $f = 120\text{Hz}$ | 50 | | dB |
| | | | $f = 100\text{kHz}$ | 20 | | |
| C_O | Ceramic Output capacitor value | | 2.2 | | | μF |
| C_{ESR} | Output Capacitor ESR value | | | | 200 | m Ω |
| eN | Output Noise Voltage (see note 2) | B = from 10Hz to 10kHz, $V_I = 3.3\text{V}$, $I_O = 10\text{mA}$, $T_j = 25^{\circ}\text{C}$ | | 0.003 | | % V_O |
| T_{SH} | Thermal shutdown trip point (see note 2) | $V_I = 3.3\text{V}$ | | 165 | | $^{\circ}\text{C}$ |
| T_{HY} | Thermal Shutdown hysteresis (see note 2) | $V_I = 3.3\text{V}$ | | 5 | | $^{\circ}\text{C}$ |

NOTE 1: This parameter is the minimum input to output differential voltage required to maintain 1% regulation with respect to the V_O nominal value. For V_O between 0.8V and 1.8V included, the V_d value is overridden by the minimum operating input voltage.

NOTE 2: Guaranteed by design. Not tested in production.

TYPICAL CHARACTERISTICS

Figure 4: Output Voltage vs Temperature

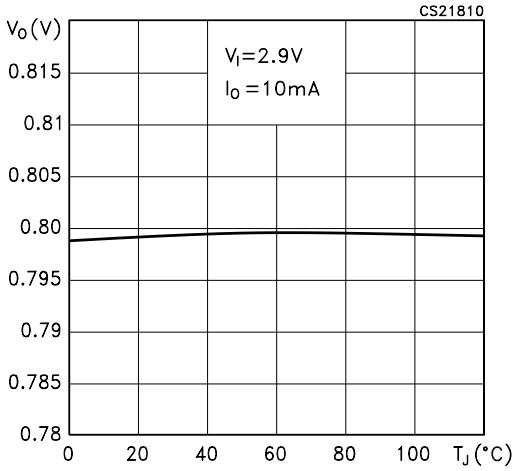


Figure 5: Output Voltage vs Temperature

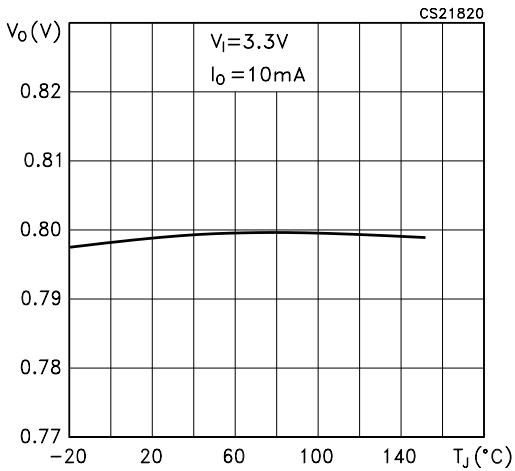


Figure 6: Line Regulation vs Temperature

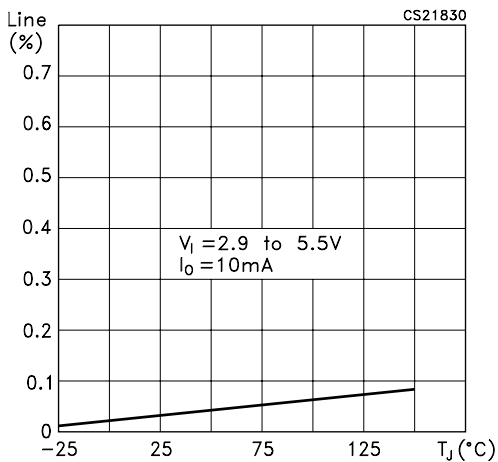


Figure 7: Load Regulation vs Temperature

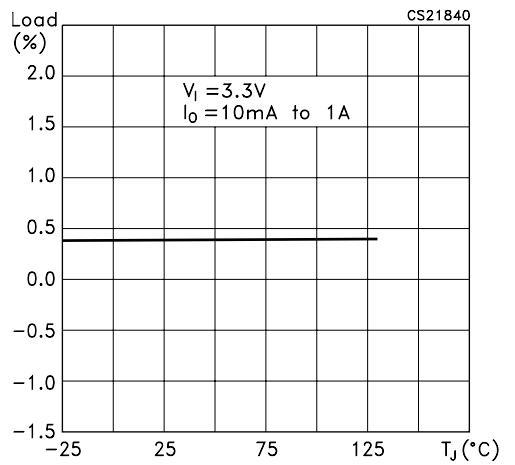


Figure 8: Quiescent Current vs Temperature

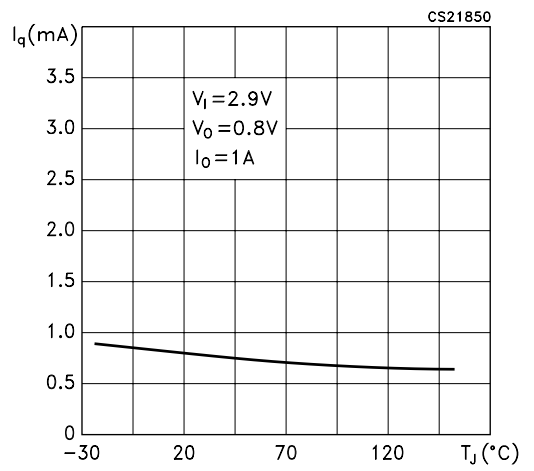


Figure 9: Quiescent Current vs Temperature

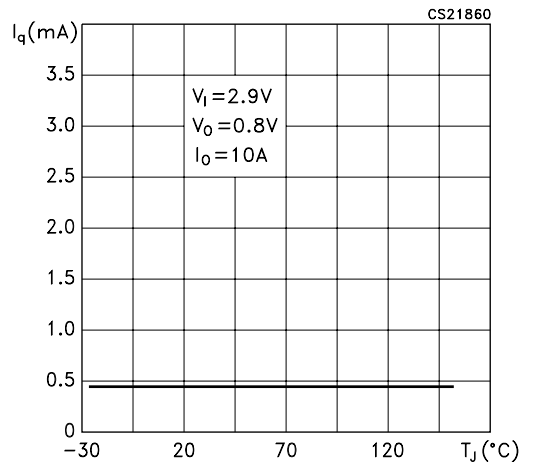


Figure 10: Quiescent Current vs Output Current

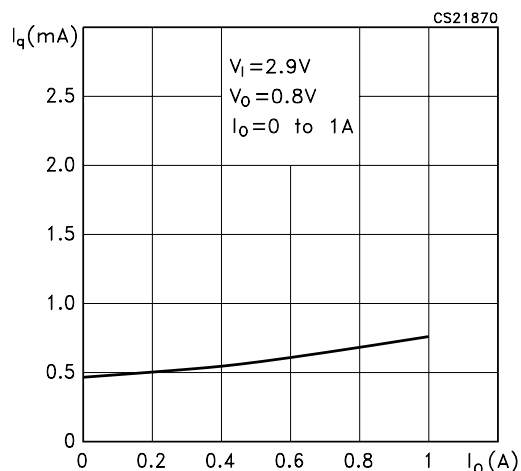


Figure 11: Quiescent Current vs Input Voltage

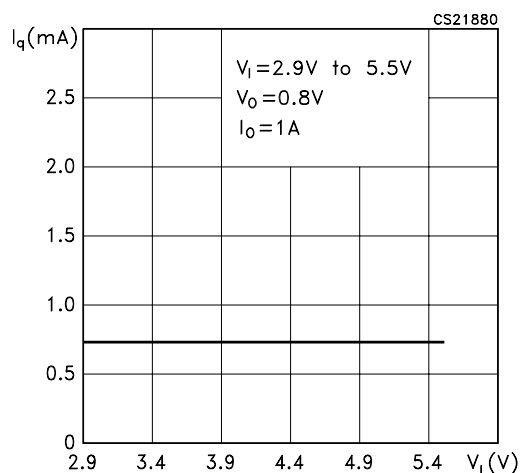


Figure 12: Dropout Voltage vs Temperature

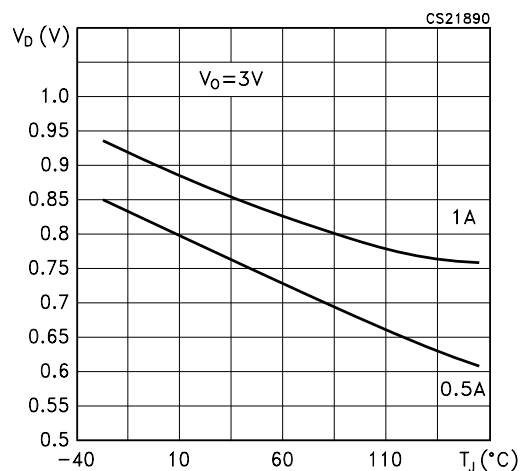


Figure 13: Dropout Voltage vs Output Current

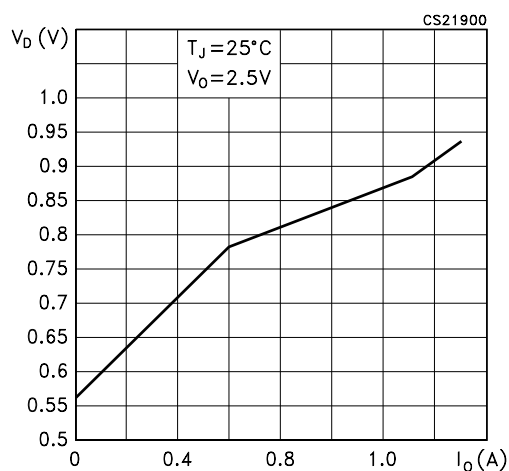


Figure 14: Supply Ripple Rejection vs Temperature

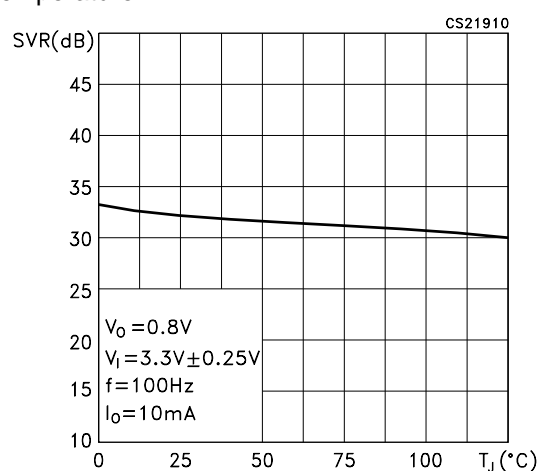


Figure 15: Supply Ripple Rejection vs Temperature

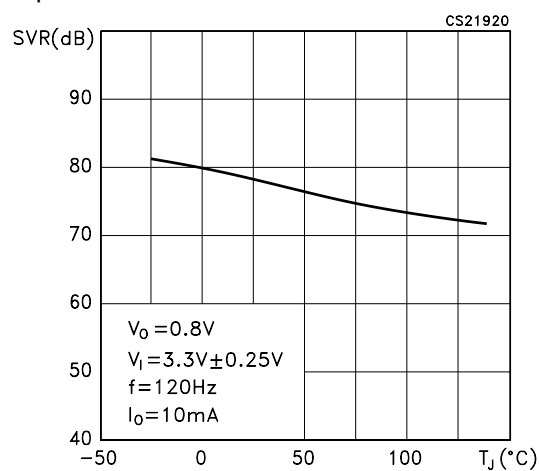


Figure 16: Supply Ripple Rejection vs Output Current

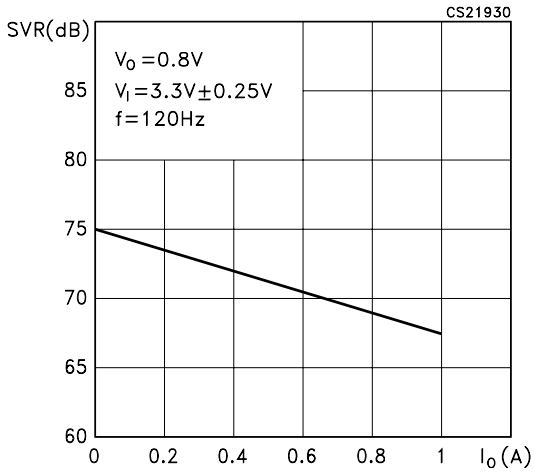


Figure 17: Supply Ripple Rejection vs Frequency

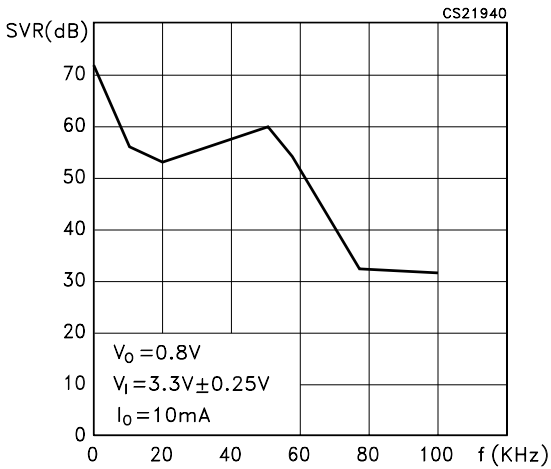


Figure 18: Adjustment Current vs Temperature

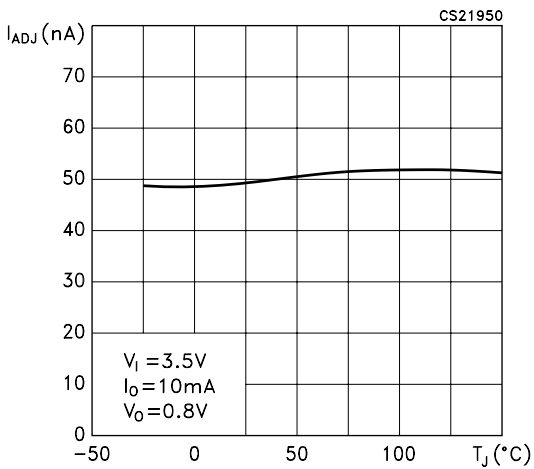


Figure 19: Adjustment Current change vs Temperature

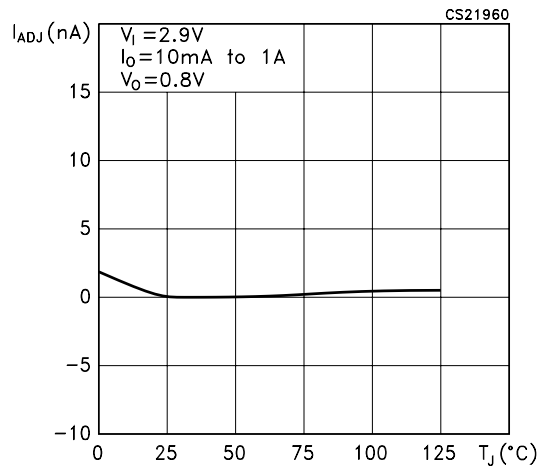


Figure 20: Minimum Output Current for Regulation vs Temperature

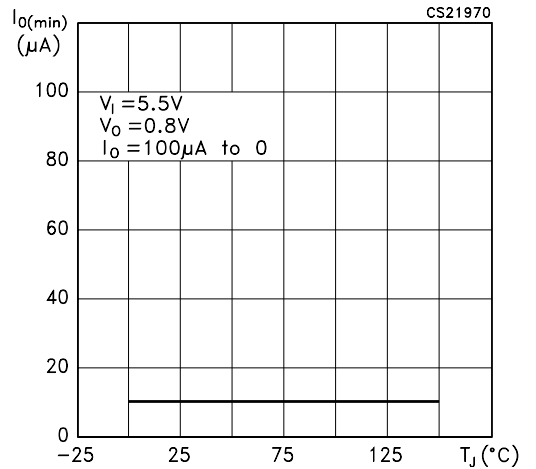


Figure 21: Minimum Output Current for Regulation vs Temperature



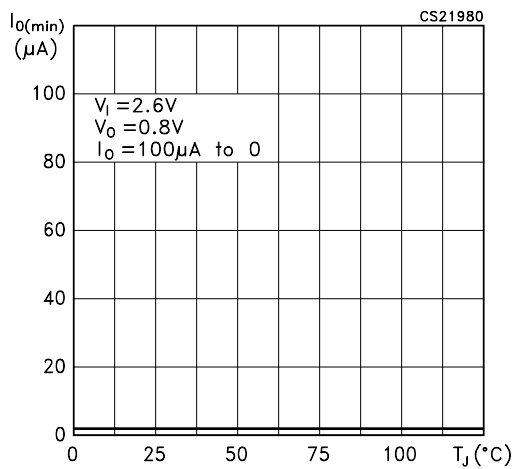


Figure 22: Load Transient

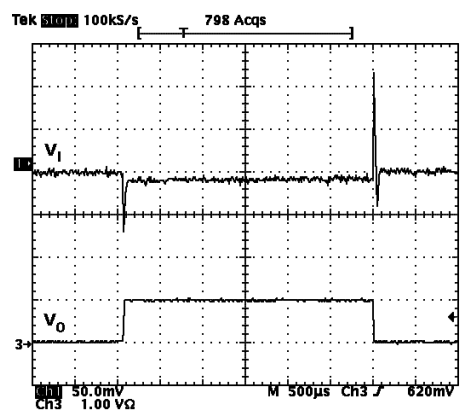

$V_I=4V$, $I_O=10mA$ to $1A$, $C_O=4.7\mu F$, $C_I=4.7\mu F$, $T_J=25^\circ C$


Figure 23: Line Transient

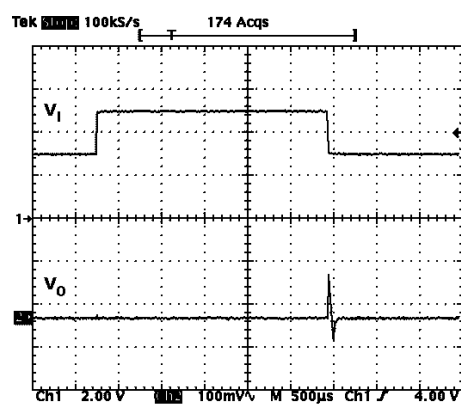

$V_I=3V$ to $5V$, $I_O=250mA$, NO C_I , $T_J=25^\circ C$, $t_{RISE}=t_{FALL}=3\mu s$

PPAK MECHANICAL DATA

| DIM. | mm. | | | inch | | |
|------|------|------|------|-------|-------|-------|
| | MIN. | TYP. | MAX. | MIN. | TYP. | MAX. |
| A | 2.2 | | 2.4 | 0.086 | | 0.094 |
| A1 | 0.9 | | 1.1 | 0.035 | | 0.043 |
| A2 | 0.03 | | 0.23 | 0.001 | | 0.009 |
| B | 0.4 | | 0.6 | 0.015 | | 0.023 |
| B2 | 5.2 | | 5.4 | 0.204 | | 0.212 |
| C | 0.45 | | 0.6 | 0.017 | | 0.023 |
| C2 | 0.48 | | 0.6 | 0.019 | | 0.023 |
| D | 6 | | 6.2 | 0.236 | | 0.244 |
| D1 | | 5.1 | | | 0.201 | |
| E | 6.4 | | 6.6 | 0.252 | | 0.260 |
| E1 | | 4.7 | | | 0.185 | |
| e | | 1.27 | | | 0.050 | |
| G | 4.9 | | 5.25 | 0.193 | | 0.206 |
| G1 | 2.38 | | 2.7 | 0.093 | | 0.106 |
| H | 9.35 | | 10.1 | 0.368 | | 0.397 |
| L2 | | 0.8 | 1 | | 0.031 | 0.039 |
| L4 | 0.6 | | 1 | 0.023 | | 0.039 |
| L5 | 1 | | | 0.039 | | |
| L6 | | 2.8 | | | 0.110 | |

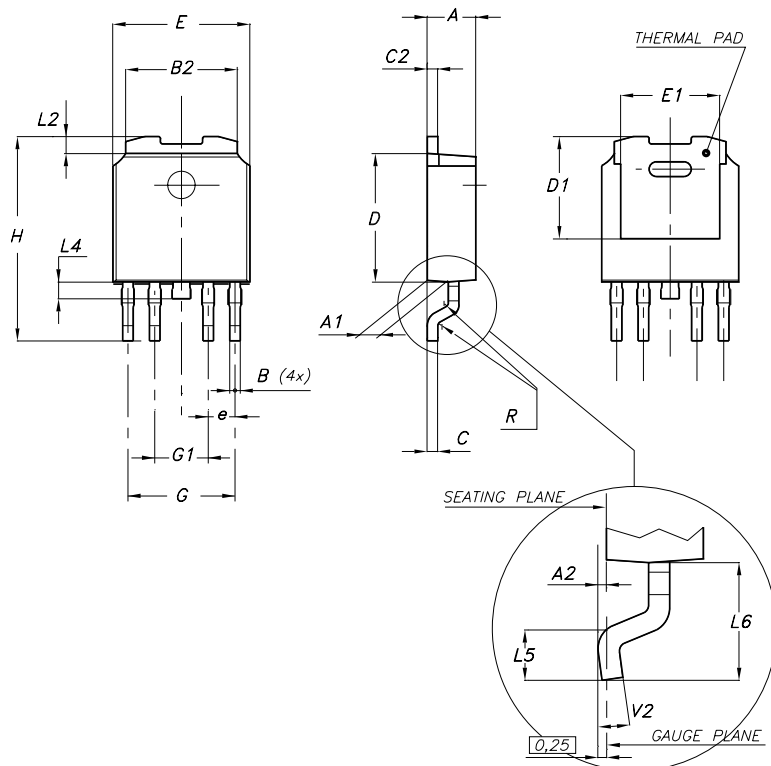

0078180-E

Tape & Reel DPAK-PPAK MECHANICAL DATA

| DIM. | mm. | | | inch | | |
|------|-------|-------|-------|-------|-------|--------|
| | MIN. | TYP | MAX. | MIN. | TYP. | MAX. |
| A | | | 330 | | | 12.992 |
| C | 12.8 | 13.0 | 13.2 | 0.504 | 0.512 | 0.519 |
| D | 20.2 | | | 0.795 | | |
| N | 60 | | | 2.362 | | |
| T | | | 22.4 | | | 0.882 |
| Ao | 6.80 | 6.90 | 7.00 | 0.268 | 0.272 | 0.276 |
| Bo | 10.40 | 10.50 | 10.60 | 0.409 | 0.413 | 0.417 |
| Ko | 2.55 | 2.65 | 2.75 | 0.100 | 0.104 | 0.105 |
| Po | 3.9 | 4.0 | 4.1 | 0.153 | 0.157 | 0.161 |
| P | 7.9 | 8.0 | 8.1 | 0.311 | 0.315 | 0.319 |

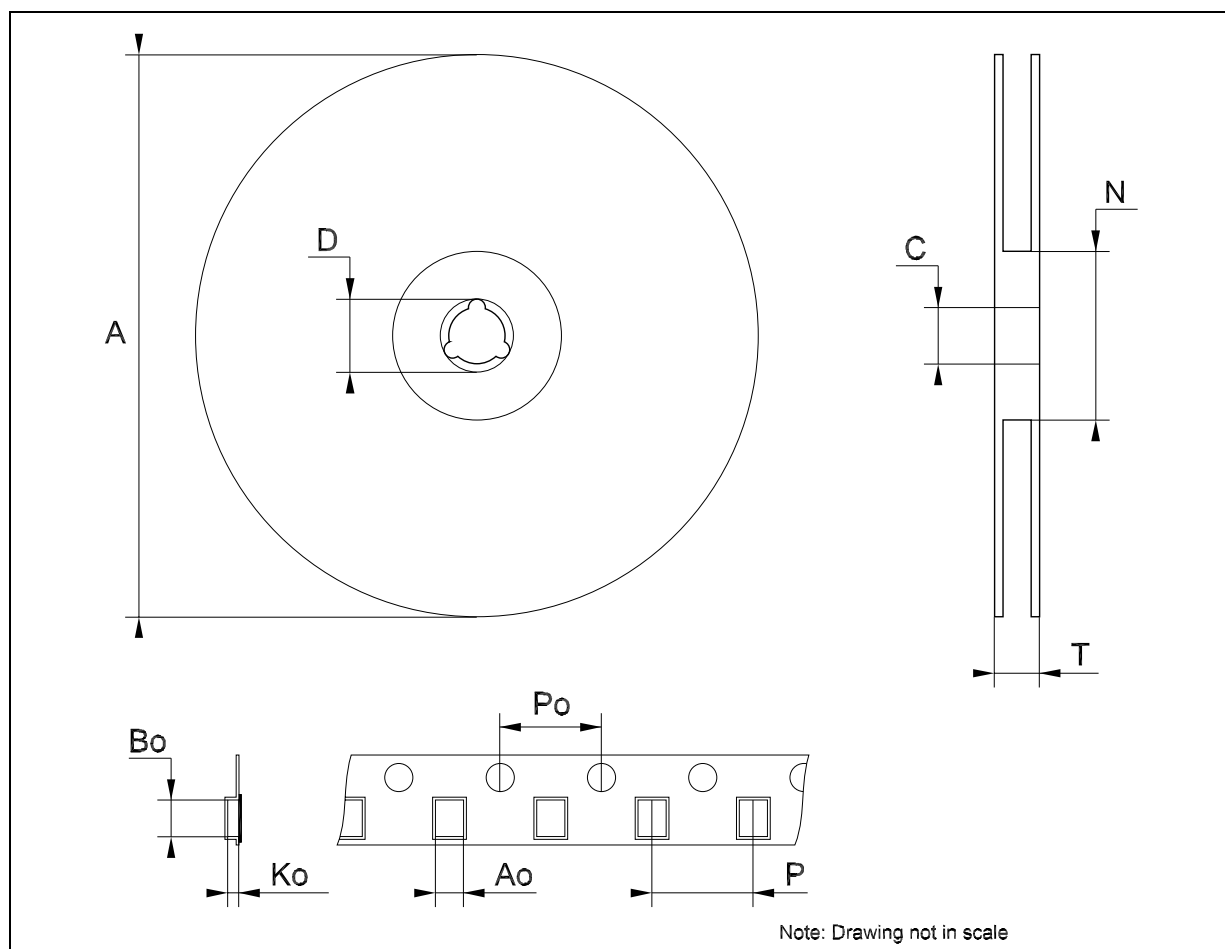


Table 6: Revision History

| Date | Revision | Description of Changes |
|-------------|-----------------|-------------------------------|
| 10-Feb-2005 | 1 | First Release. |

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics

All other names are the property of their respective owners

© 2005 STMicroelectronics - All Rights Reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com