


- △ CONTACTS DESIGNED FOR 28 AWG STRANDED OR 26, 28, & 30 AWG SOLID WIRE.
- △ AMP TRADEMARK LOCATED IN APPROX AREA SHOWN.
- △ STANDOFFS: POSN B (2) STANDOFFS AS SHOWN. POSN 14-20 (3) STANDOFFS, (1) CENTERED BETWEEN (2) SHOWN.
- △ .000100-.000200 BRIGHT TIN LEAD OVER .0000050 NICKEL ON ENTIRE CONTACT.
- △ HEIGHT AFTER TERMINATION IS .253 REF.
- △ INDICATES NO 1 POSITION.

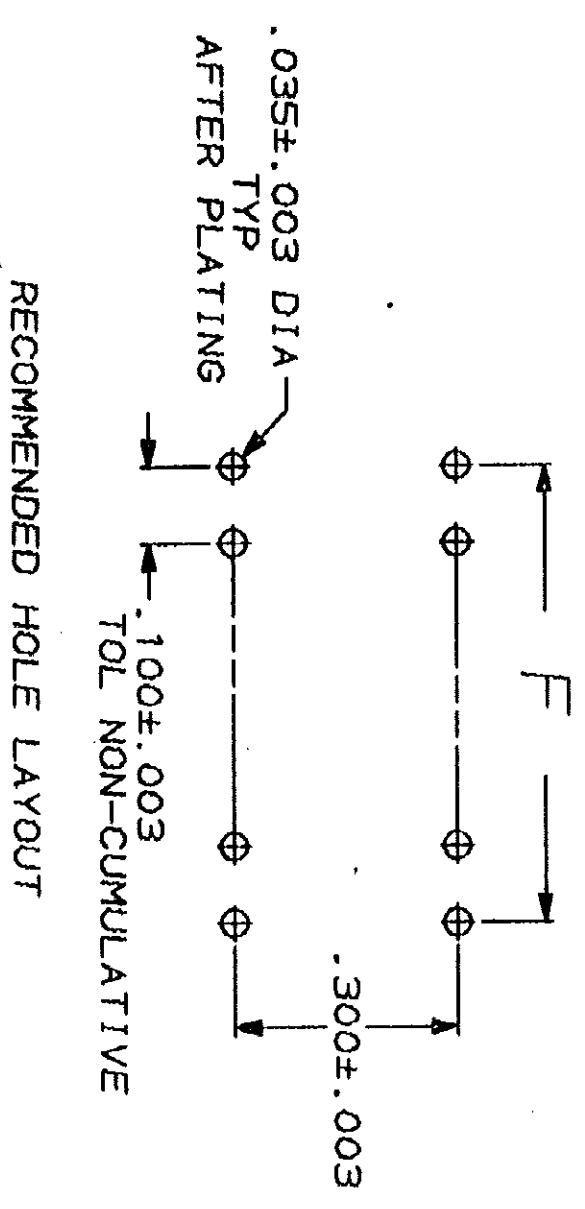

900	9	1.088	.900	.950	19	20	746613-5
.800	8	.988	.800	.850	17	18	-4
.700	7	.888	.700	.750	15	16	-3
.600	6	.788	.600	.650	13	14	-2
.500	5	.688	.500	.550	11	12	-1
.400	4	.588	.400	.450	9	10	-1
.300	3	.488	.300	.350	7	8	-1
	F	E	D	C	B	A	NO OF POSN

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE IN INCHES

DR: H. E. ZEIGER 1-10-86
 CHK: J. PEACHEY 1-9-86
 APPD: M. SCULLY 1-10-86
 APPD: D. WERTMAN 1-10-86

MATERIAL: HOLED PARTS, 94V-0 RATED THERMOPLASTIC, COLOR: BLACK
 CONTACTS: PHOS BRONZE

FINISH: CONTACTS: △

DR: AMP INCORPORATED, Philadelphia, Pa. 19105

NAME: AMP
 KIT, AMP-LATCH DIP PLUG,
 PREASSEMBLED .100 X .300 CENTERS,
 FULL TIN PLATED CONTACTS

SIZE: F3CH NO: 00779 DRAWING NO: 746613
 SCALE: NTS SHEET: - OF -

LOC	DIST	REV	ZONE	LTR	DESCRIPTION	DATE	APPD
AR	39	F			REVISED & REDRAWN ECN-0957		
		D			REV PER ECN 1297	1-3-86	JP SW
		D1			REVISED ECN-GF-1577	2-3-86	
		E			REVSD/ECN GF-1706	01-88	
		F			REV PER ECN CF1823	4-25-88	