


**Electrical test:**  
 1. 100% short, open, miswire test  
 2. Conduct resistance: 2 Ohm(max)  
 3. Insulation resistance: 10Mohm(min)  
 4. dielectric test: DC 300V

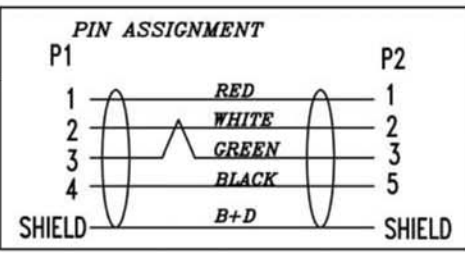

Part Number  
**AK669M-X-R**

**Lenght**  
 1 1Meter  
 2 2Meters

13	PACKING TAPE COLOR YELLOW L=2200mm			1/100	
12	TRANSPARENT ADHESIVE TAPE L=2600mm			1/100	
11	CARTON 5 LAYER 40*30*20CM K=K GLUE TYPE			1/100	
10	WATERPROOF BAG (14+15)*24" T=0.04mm			1/100	
9	PE BAG 230*300*0.04mm PRINT BLACK"MADE IN CHINA"+10PCS			1/10	
8	PE BAG 100*200*0.04mm PRINT BLACK"MADE IN CHINA"	1	PCS		
7	ROHS LABEL 35*22mm WHITE/BOTTOM TEXT/BLACK		112/100		
6	INNER MODEL LDPE	4	g		
5	OUTER MODEL PVC 45P COLOR BLACK(CS-001)	9	g		
4	ROUND TIN OD.8mm	0.4	g		
3	USB MINI USB5P/M SOLDER TYPE PLASTIC BLACK	1	P2		
2	USB MINI USB5P/F SOLDER TYPE PLASTIC BLACK	1	P1		
1	USB UL2725 28AW*1P+28AW*2C+AL/MY+D+B0D3.8mm BLACK(CS-001)	01	1	2000mm	
<b>NO.</b>	<b>PART NO.</b>	<b>DESCRIPTION</b>	<b>VENDER</b>	<b>QTY</b>	<b>UNIT/REF</b>

REV	REV./NO.	DESCRIPTION	DATE
		<b>ASSMANN</b> Electronics, Inc.	<b>TITLE:</b> MIN USB5P/F TO MIN USB5P/M CABLE 1000mm Version 1.1
<b>DRAW</b>		<b>DWN NO.</b>	<b>REV</b>
<b>JE</b>			<b>A</b>
<b>CONFIRM</b>		<b>CUS. P/N:</b>	<b>REV</b>
<b>DIRECTOR</b>			
<b>CONFIRM</b>		<b>CUS.</b>	X013
<b>MANAGER</b>			
<b>APPROVAL</b>			
<b>SL</b>		<b>SHEET</b> 1 <b>to</b> 1	

**ROHS**