


DATE BY REVISION

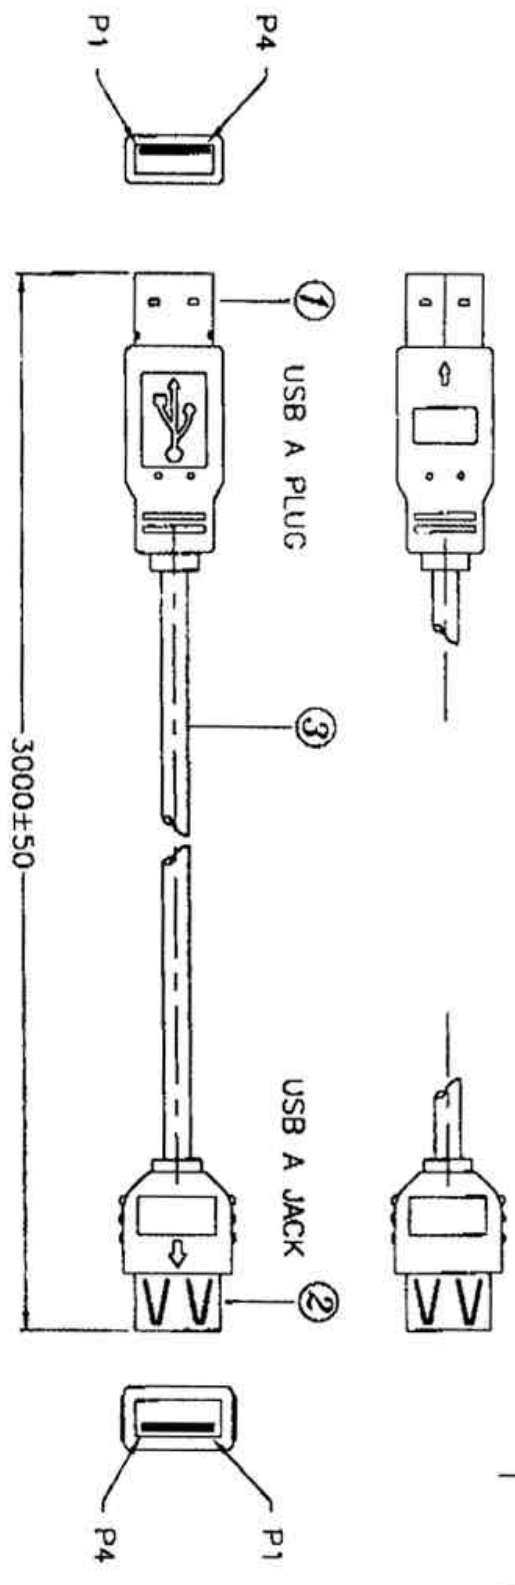


MAT'L:
 1. CABLE: UL2725, #28X1P (INSULATION: PE) + #28X2C (INSULATION: SR - PVC)
 + AL / MY + BRAID, TINNED COPPER, O.D.: 4.7
 2. CONNECTOR: USB A PLUG
 USB A JACK

NOTE:
 1. TOTAL LENGTH: 3000±50mm
 2. COLOR: BEIGE
 3. MOLDED TYPE

准子出圖
 88.5.-7
 工程 部

CONFIGURATION:
 USB A PLUG USB A JACK

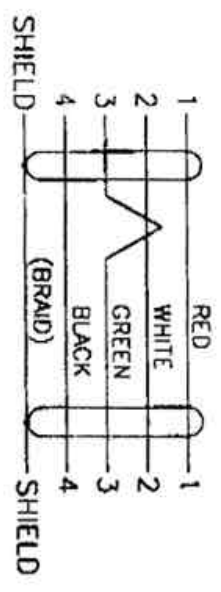

PN# AK669-30

DATE	7 MAY, 1999	PARTS NO	U/B 0028 M
UNIT	MM	DRAWN NO	000452
SCALE			

TITLE: Universal Serial Bus Cable
 USB A PLUG-USB A JACK

NO.	DESCRIPTION	QTY
③	UL2725, #28X1P + #28X2C + AL / MY + 8, O.D.: 4.7	3M
②	USB A JACK	1
①	USB A PLUG	1

Y.C.C 5/7
 CHECK APPRO
 ASSMANN ELECTRONICS, INC.