


CONFIGURATION:

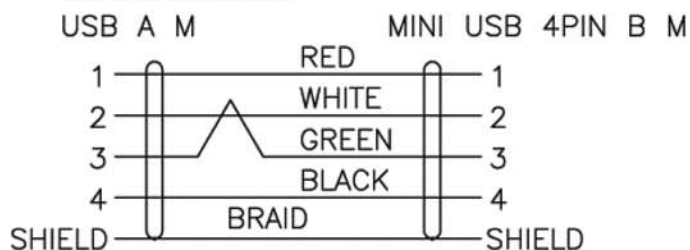

ITEM NO	L
AK670M-1-R	1000±30MM
AK670M-2-R	2000±50MM
AK670M-3-R	3000±50MM
AK670M-5-R	5000±50MM

④	OUTER MOLD:45P PVC COLOR:BLACK(CS-001)
③	CONNECTOR:MINI USB 4P B PLUG SOLDER TYPE 3U"
②	CONNECTOR:USB A MALE SOLDER TYPE 3U" INSULATION:WHITE
①	CABLE:UL20276,28AWG*1P+28AWG*2C+AL/MY+SPIRAL,O.D:3.8MM PVC JACKET COLOR:BLACK(CS-001)
NO.	DESCRIPTION

ELECTRECAL TEST:

- 1.100% SHORT, OPEN, MISWIRE TEST
- 2.CONDUCT RESISTANCE: X Ohm (MAX.)
(0<L<3M:X=2; 3M≤L<10M:X=5; 10M≤L:X=10)
- 3.INSULATION RESISTANCE: 10M Ohm (MIN.)
- 4.DIELECTRIC TEST: AC 300V



ITEM NO	AK670M-X-R (Version 1.1) AK670M/2-X-R (Version 2.0)
TITLE	USB Mini Cable 1.1 & 2.0, USB A Male to USB B Mini (4pin)

ASSMANN
Electronics, Inc.

1840 W. Drake Drive, Suite 101 – Tempe, AZ 85283
Toll Free: 1-877-277-6266 Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED
© Copyright 2008 by Assmann Electronic Components
All International Rights Reserved