
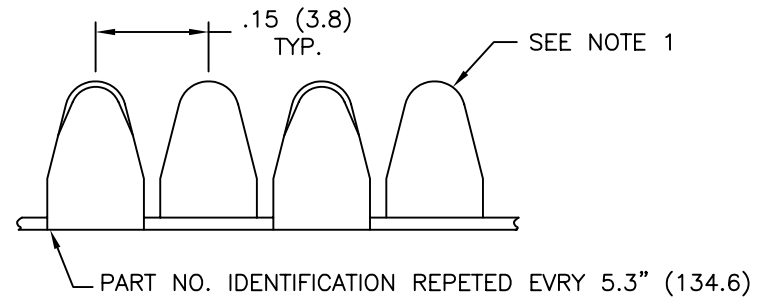


PART NO.	DIM "W"	"T" APPLICATION THICKNESS
MCG-1E	.14 (3.6)	.025-.036 (0.64-.091)
MCG-2E		.037-.055 (0.93-1.40)
MCG-3E		.056-.074 (1.42-1.80)
MCG-4E	.18 (4.6)	.075-.093 (1.91-2.36)
MCG-6E		.113-.134 (1.87-3.40)

NOTES

- MATERIAL: 304 STAINLESS STEEL.
FINISH: EPOXY.
COLOR: GREEN.
- TABER ABRASION RESISTANCE: 1KG LOAD, C17 WHEEL (ASTM D 4060) 8 mg LOSS AFTER 5000 CYCLES
- DIELECTRIC STRENGTH: 1000 VOLTS @ 60 HZ.
- HEAT CONTINUOUS: 285°F (140°C).
- SALT SPRAY TESTING: PER ASTM B117. MIL-STD-202, METHOD 301-1000 HOURS.
- FLAMMABILITY: UL94-VO YELLOW CARD NO. E113553 NZMT2.
- RANDOM VIBRATION: MIL-STD-1344 METHOD 2005.1, TEST CONDITIONS VI LETTER J. DURATION 8 HOURS LONGITUDINAL AND 8 HOURS PERPENDICULAR. rms G 41.7
- FITS ANY TWO AXIS CONTOUR.
- PACKAGING: 100 FT REEL. 25 FT WITH SHEARS, AVAILABLE BY SPECIAL ORDER ONLY. TO ORDER, ADD SUFFIX "-PK" TO PART NO.
- CUTTING TOOL: TO ASSURE A BURR FREE CUT ORDER SHEARS NO. MCGS-1

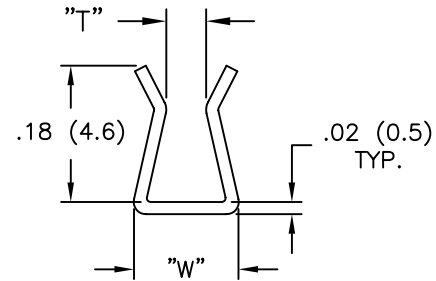

US PATENTS 4,769,966, 5,343,669, 6,300,568

G	SEE ECN #529 FOR CHANGES	SM 11.20.02	TITLE: METAL CONTINUOUS GROMMET				DWG IN IN (MM)	FINAL	PRINT TYPE
F	SEE ECN #517 FOR CHANGES	SM 11.12.02							
E	STAMPING AND NOTES ADDED.	J.L. 1.20.99	TOLERANCES UNLESS NOTED				PART #	SEE TABLE	CA
D	DIM "T" CHANGED TO .025 WAS .020	J.L. 2.9.98	.XX=±.010						
C	CHART DIM'S CHANGED PER PART	JB 07.10.96	.XXX=±.005				FILE # MCG-XE		
B	MCGGF DETAIL ADDED	PB 05.17.95	FRAC=±1/64				DWN: P.B.		
A	25 FT. PACK WITH SHEARS PART NO. ADDED TO TABLE	PB 083094	ANG=±1'				APP:		
REV	DESCRIPTION	ENGR DATE	RE: RICHCO, INC.				DT: 05-02-94 DT:		
			RICHCO INC.				PO BOX 804238, CHICAGO, 60680		
							(773) 539-4060		