




| PART NO. | WIRES ACCOMMODATED | APPROX. WIRE SIZE | MOUNTING HOLES | | C | D | E | F MAX. PANEL THICKNESS |
|----------|--------------------------------|-------------------------|----------------|--------------|--------------|--------------|-------------|---------------------------|
| | | | A | B | | | | |
| SRB-D-3 | SP-1, SPT-1 #18/2 | .120 X .220 (3.1 X 5.6) | .437 (11.10) | .395 (10.03) | .460 (11.68) | .410 (10.41) | .160 (4.06) | .062 (1.57) |
| SRB-F-2 | SP-1, SPT-1 #18/2 | .11 X .21 (2.8 X 5.3) | .375 (9.53) | .345 (8.76) | .425 (10.80) | .410 (10.41) | .155 (3.94) | .062 (1.57) |
| | XT (CLOCKWIRE) #18/2 | .09 X .18 (2.3 X 4.6) | | | | | | |
| SRB-F-4 | SP-2, SPT-2 #16/2 HPN #16/2 | .161 X .30 (4.1 X 7.6) | .515 (13.08) | .465 (11.81) | .570 (14.98) | .500 (12.70) | .171 (4.34) | .100 (2.54) |
| | SP-2, SPT-2 #18/2 HPN #18/2 | .15 X .28 (3.8 X 7.1) | | | | | | |
| SRB-F-5 | HPN #16/3 | .16 X .37 (4.1 X 9.4) | .562 (14.27) | .530 (13.46) | .610 (15.49) | .600 (15.24) | .240 (6.10) | .130 (3.30) |
| | SPT-2 #18/3 | .15 X .34 (3.8 X 8.6) | | | | | | |
| | SPT-3 #16/2 | .20 X .37 (5.1 X 9.4) | | | | | | |
| SRB-F-7 | SPT-3 #18/2 | .18 X 3.5 (4.6 X 8.9) | .500 (12.70) | .456 (11.58) | .545 (13.84) | .401 (10.20) | .142 (3.60) | .071 (1.80) |
| | SPT-1 #18/3 | .19 X .30 (3.0 X 7.6) | | | | | | |
| | SPT-2 & HPN #18/2 | .15 X .28 (3.8 X 7.1) | | | | | | |
| SRB-R-5 | SPT-2 & HPN #16/2 | .16 X .30 (4.1 X 7.6) | .500 (12.70) | .465 (11.81) | .560 (14.22) | .430 (10.92) | .165 (4.19) | .100 (2.54) |
| | SV, SVT #18/2 | .250 (6.43) | | | | | | |
| | SV, SVT #18/3 | .265 (6.73) | | | | | | |
| | HPD #16/2 | .290 (7.37) | | | | | | |
| SRB-R-6 | HPD #18/2 | .270 (6.86) | .656 (16.66) | .570 (14.48) | .730 (18.54) | .680 (17.27) | .275 (6.99) | .125 (3.18) |
| | SJ, SJT, SJO #16/2 | .325 (8.26) | | | | | | |
| | SJ, SJT, SJO #18/2 | .300 (7.62) | | | | | | |
| | SJ, SJT, SJO #16/3 | .355 (9.02) | | | | | | |
| | SJ, SJT, SJO #18/3 | .330 (8.38) | .687 (17.45) | | | | | |


MOUNTING HOLES



BUSHING DIMENSIONS

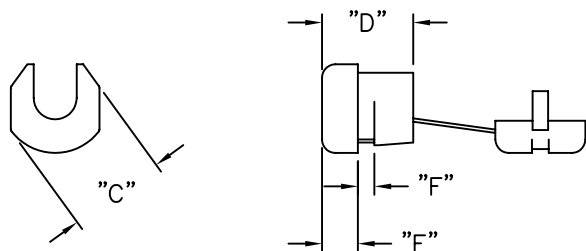

KEY-CONTOUR STYLE

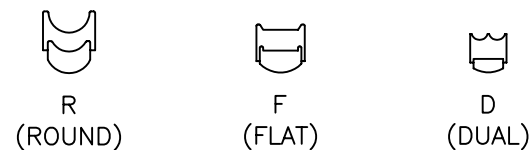

- NOTES:
 1. MATERIAL: NYLON 6/6 (RMS-01).
 2. COLOR: BLACK.

| | | | | |
|---|--|---------------------------|------------------|-------|
| TITLE: STRAIN RELIEF BUSHINGS | | | DWG IN IN (MM) | |
| TOLERANCES UNLESS NOTED .XX=±.010 .XXX=±.005 FRAC=±1/64 ANG=±1° | FILE # SRB MAT'L: SEE NOTES | DWN: R.S. DT: 12-08-93 | APP: DT: | FINAL |
| RE: RICHCO, INC. | RICHCO INC. PO BOX 804238, CHICAGO, 60680 (773) 539-4060 | PART # SEE TABLE | PRINT TYPE CA | |

| | | |
|-----|---|-------------|
| B | REM. "PART STAMPING" COLUMN, CHANGED FILE NO. | SM 01.08.02 |
| A | UL and CSA note removed | JL 12.9.99 |
| REV | DESCRIPTION | ENGR DATE |