




**Tripp Lite**  
1111 West 35th Street  
Chicago, IL 60609 USA  
Telephone: +(773) 869 1234  
E-mail: [saleshelp@tripplite.com](mailto:saleshelp@tripplite.com)

## Model #: OMNI300NAFTA

### OmniSmart UPS System - NAFTA assembled version of OMNISMART300PNP

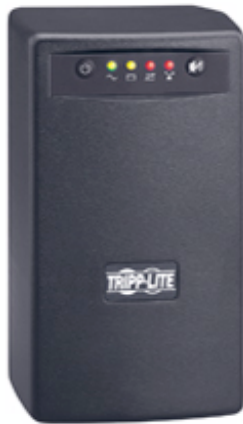

#### Highlights

- 300VA line interactive tower UPS
- Maintains 120V nominal output over an input range of 75 to 147V
- Workstation optimized features include USB port and single line TEL / DSL line surge suppression
- Input: NEMA 5-15P (120V 15A) / Output: 3 NEMA 5-15R (120V)
- 2 year product warranty / \$200,000 Ultimate Lifetime Insurance (USA, Puerto Rico & Canada only)

#### Description

Tripp Lite's OMNI300NAFTA line-interactive UPS system offers voltage regulation, surge suppression and long-lasting battery support for personal computers, internetworking equipment and other sensitive electronics. Large internal battery supports entry level PC systems for up to 30 min. during power failures so that connected equipment can be shutdown without data loss. Automatic voltage regulation (AVR) circuits regulate brownouts as low as 75V and overvoltages as high as 147V to normal 120V levels without consuming battery power. Offers complete desktop power protection in an attractive black upright tower configuration. Includes 3 battery-supported outlets with full AC surge suppression. HID-compliant USB port enables optional unattended system shutdown without data loss in case of extended power failure; USB cable included. HID-compliant USB port also enables direct integration with built-in power management and auto-shutdown features of Windows and MAC OS X. PowerAlert Software available via free download from [www.tripplite.com](http://www.tripplite.com). Built-in dataline protection jacks offer protection on a single dialup tel/DSL line. Built-in audible alarm and 4 front panel LEDs indicate line power status, battery power status, battery low/replace status and voltage regulator operation. 300VA/180W power-handling ability supports entry-level PCs, network workstations, point-of-sale equipment, small business phone systems, audio/video equipment and home theater systems. Offers 10.5 min. battery runtime with a full load of 300VA/180W and 27 min. with a half load of 150VA/90W. Supports battery replacement via built-in access panel. 2-year warranty; \$200,000 connected equipment insurance (USA & Canada only).

#### Applications

Entry-level PCs, networked workstations, point-of-sale equipment, small business phone systems, audio/video equipment and home theater systems. Ideal for sensitive electronic applications in areas where brownouts and overvoltages are common.

#### Package Includes

- OMNI300NAFTA UPS System
- USB and telephone interconnection cables
- Instruction manual with warranty information

#### Features

- OMNI300NAFTA line-interactive UPS system offers automatic voltage regulation and battery support, plus complete AC and tel/DSL line surge suppression
- Supports entry-level PC systems for up to 30 min. during power failures to enable a safe system shutdown

Supports a full load of 300VA/180W for 10.5 min. and a half load of 150VA/90W for 27 min.

Automatic voltage regulation (AVR) circuits correct brownouts as low as 75V and overvoltages as high as 147V back to normal 120V levels without consuming battery power

Attractive black tower configuration

Includes 3 battery-supported AC outlets

Built-in HID-compliant USB port and PowerAlert UPS power management software (available via free download at [tripplite.com](http://tripplite.com)) and cabling provide monitoring of in-depth site power conditions, full UPS status and fault warnings, and output load level

HID-compliant USB port also enables direct integration with built-in power management and auto-shutdown features of Windows and MAC OS X

Supports Tripp Lite's WatchDog Service Monitoring/Rebooting Software (part # WATCHDOGSW)

Built-in dataline suppression jacks protect a single dialup tel/DSL line

Built-in audible alarm and 4 front panel LEDs indicate UPS system and line power status

350VA/180W power-handling ability supports a variety of computer, internetworking, telecom and consumer electronics equipment

Supports battery replacement via built-in access panel

Compatible with 120V/60Hz applications for USA, Canada, Mexico and more

2-year warranty

\$200,000 connected equipment insurance (USA & Canada only)

## Specifications

SYSTEM OVERVIEW	
Voltage compatibility	120VAC
Frequency compatibility	60Hz
OUTPUT	
Output VA	300
Output watts	180
Output nominal voltage	120VAC
Output voltage regulation	LINE MODE: Sine wave line voltage 120V (-18%/+8%), BATTERY MODE: PWM sine wave output 115V +/-5%
Output frequency regulation	LINE MODE: Passes line frequency of 60Hz +/-10% BATTERY MODE: Inverter output regulated to 60Hz +/-0.5Hz
Outlet quantity / type	3 NEMA 5-15R
INPUT	
Maximum input amps	2.1A
Input connection type	NEMA 5-15P right angle
Input cord length	6 ft., 16 gauge
Recommended electrical service	15A 120V
BATTERY	
Full load runtime	10.5 min. (300VA)
Half load runtime	27 min. (150VA)
DC system voltage	12V DC
Typical battery lifespan	3-6 years, depending on usage
Battery recharge rate	2-4 hours to 90%
Replacement Battery Cartridge	RBC51
VOLTAGE REGULATION	
Voltage regulation description	Automatic voltage regulation (AVR) circuits maintain clean, regulated computer-grade 120V nominal output, without using battery power, during brownouts to 75V and overvoltages to 147V

<b>Overvoltage correction</b>	Input voltages between 128-147VAC are reduced by 12%
<b>Direct pass through</b>	Input voltages between 108-127VAC are passed on to connected equipment unchanged
<b>Brownout correction</b>	Input voltages between 93-107VAC are boosted by 14%
<b>Severe brownout correction</b>	Input voltages between 75-92VAC are boosted by 30%
<b>LEDS ALARMS &amp; SWITCHES</b>	
<b>Front panel LEDs</b>	4 front panel LEDs indicate line power status, battery power status, battery low/replace status and voltage regulation operation
<b>Alarms</b>	Audible alarm with 15-sec. delay sounds to indicate loss of utility power. Alarm can be silenced by pressing front panel alarm cancel button. Once silenced, alarm will re-sound when approximately 2 min. runtime remain.
<b>Switches</b>	Includes 2 front panel switches - one main on/off power switch and one dual function alarm cancel/self test button
<b>SURGE / NOISE SUPPRESSION</b>	
<b>AC surge suppression</b>	480 joules
<b>AC suppression response time</b>	Instantaneous
<b>Dataline suppression</b>	Tel/DSL
<b>EMI / RFI AC noise suppression</b>	Yes
<b>PHYSICAL</b>	
<b>Shipping weight (lbs)</b>	15
<b>Shipping weight (kg)</b>	6.8
<b>Shipping Dimensions (HWD/in)</b>	12.25 x 10 x 8.5
<b>Shipping Dimensions (HWD/cm)</b>	31.1 x 25.4 x 21.6
<b>Unit weight (lbs)</b>	13.5
<b>Unit weight (kg)</b>	6.1
<b>Unit Dimensions (HWD/in)</b>	8.5 x 5 x 6.5
<b>Unit Dimensions (HWD/cm)</b>	21.6 x 12.7 x 16.5
<b>Material of construction</b>	PVC
<b>Form factors supported</b>	Tower
<b>Cooling method</b>	Convection
<b>Battery Access</b>	Battery access door allows user replacement of UPS batteries
<b>ENVIRONMENTAL</b>	
<b>Operating Temperature</b>	+32 to +104 degrees Fahrenheit / 0 to +40 degrees Celsius
<b>Storage Temperature</b>	+5 to +122 degrees Fahrenheit / -15 to +50 degrees Celsius
<b>Relative Humidity</b>	0 to 95%, non-condensing
<b>COMMUNICATIONS</b>	
<b>Network monitoring port</b>	USB (HID)
<b>Software and cabling included</b>	USB cabling included; PowerAlert Software available for free download at <a href="http://www.tripplite.com">www.tripplite.com</a>

<b>WatchDog compatibility</b>	Compatible with Tripp Lite's Watchdog system service to restore operation to locked equipment through soft reboot of application/OS or hard power off/on reboot of connected equipment"ideal for unattended kiosk applications
<b>LINE / BATTERY TRANSFER</b>	
<b>Transfer time from line power to battery mode</b>	2-4 milliseconds
<b>Low voltage transfer to battery power</b>	Switches to battery power as line voltage decreases to 75V or less. Resets back to line power mode as line voltage increases to 79V or higher.
<b>High voltage transfer to battery power</b>	Switches to battery power as line voltage increases to 147V or higher. Resets back to line power mode as line voltage decreases to 143V or less.
<b>CERTIFICATIONS</b>	
<b>Certifications</b>	Tested to UL1778 (USA), CSA C22.2 No. 107.3 (Canada), Class B (emissions), NOM (Mexico), FCC Part 68 / Industry Canada (telecommunications), RoHS Compliant
<b>WARRANTY</b>	
<b>Product warranty</b>	2 years
<b>Connected equipment insurance (USA and Canada Only)</b>	\$200,000 connected equipment insurance (USA & Canada only)
<b>Optional coverage</b>	3-5 year warranties, plus next-day and on-site warranty coverage available. Contact Tripp Lite for additional information.
<b>SPECIAL FEATURES</b>	
<b>Cold Start</b>	Inverter can be cold started to enable temporary AC output during a power failure
<b>Appearance</b>	Tower format; attractive all-black color scheme

More information, including related products, owner's manuals, and additional technical specifications, can be found online at [www.tripplite.com/products/model.cfm?txtModelID=3528](http://www.tripplite.com/products/model.cfm?txtModelID=3528).