


# MicroOLED

## $\mu$ OLED-96-PROP USERS MANUAL

**Embedded Propeller OLED Display Module**  
tiny development module with integrated micro-SD card support

Revision 1.0

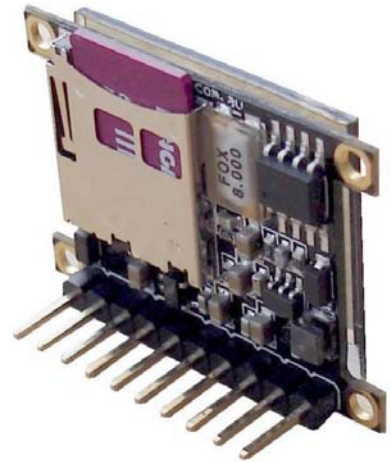

**4D Systems**



**μOLED-96-PROP**

### **PROPRIETARY INFORMATION**

The information contained in this document is the property of [4D Systems Pty. Ltd.](#), and may be the subject of patents pending or granted, and must not be copied or disclosed without prior written permission. It should not be used for commercial purposes without prior agreement in writing.

[4D Systems Pty. Ltd.](#) Endeavours to ensure that the information in this document is correct and fairly stated but does not accept liability for any error or omission. The development of [4D Systems](#) products and services is continuous and published information may not be up to date. It is important to check the current position with [4D Systems](#).

Contact details are available from the company web site at [www.4dsystems.com.au](http://www.4dsystems.com.au)

All trademarks recognised and acknowledged.

Copyright [4D Systems Pty. Ltd.](#) 2000-2007

### **DISCLAIMER OF WARRANTIES & LIMITATION OF LIABILITY**

4D Systems Pty. Ltd. makes no warranty, either express or implied with respect to any product, and specifically disclaims all other warranties, including, without limitation, warranties for merchantability, non-infringement and fitness for any particular purpose. 4d systems' sole obligation and liability for product defects shall be, at 4d systems' option, to replace such defective product or refund to buyer the amount paid by buyer therefore. In no event shall 4D Systems' liability exceed the buyer's purchase price.

The foregoing remedy shall be subject to buyer's written notification of defect and return of the defective product within ninety (90) days of purchase. The foregoing remedy does not apply to products that have been subjected to misuse (including without limitation static discharge), neglect, accident or modification, or to products that have been soldered or altered during assembly, or are otherwise not capable of being tested, or if damage occurs as a result of the failure of buyer to follow specific instructions.

In no event shall 4D Systems be liable to the buyer or to any third party for any indirect, incidental, special, consequential, punitive or exemplary damages (including without limitation lost profits, lost savings, or loss of business opportunity) arising out of or relating to any product or service provided or to be provided by 4D Systems, or the use or inability to use the same, even if 4D Systems has been advised of the possibility of such damages.



**μOLED-96-PROP**




## Table of contents

<b>1.</b>	<b>Introduction</b>	<b>4</b>
<b>2.</b>	<b>Features</b>	<b>5</b>
<b>3.</b>	<b>User Interface Pin Description</b>	<b>6</b>
<b>4.</b>	<b>Circuit Diagram</b>	<b>7</b>
<b>5.</b>	<b>Display Graphics Drivers Object Code</b>	<b>9</b>
<b>6.</b>	<b>USB-Serial Interface</b>	<b>10</b>
<b>7.</b>	<b>Mechanical Details</b>	<b>11</b>
<b>8.</b>	<b>Related Products</b>	<b>12</b>
<b>15.</b>	<b>Appendix</b>	<b>13</b>
	<b>15.1 Help and Other Information</b>	<b>13</b>

# 1 Introduction

The **μOLED-96-PROP** is an extremely compact and a cost effective ready to go 'drop in' embedded display module that will deliver 'stand-alone' functionality to your project. The module represents a unique combination of a powerful micro controller, the Propeller chip from Parallax Inc, a 0.96" 96x64 pixel 65K full colour OLED display and a micro-SD memory card socket capable of supporting up to 2GB of storage; all in an incredibly tiny 27mm X 23mm package. The module is designed to provide your projects with integrated functionality right out of the box.


The **μOLED-96-PROP** allows you to leverage the extensive library of Propeller Objects already written, to make the module into a complete project in record time. The **μOLED-96-PROP** is supplied with a prototype SPIN Object that handles the display initialization and provides sample Methods for low-level graphics functions. It is intended as a shell, into which, you can further program and develop the functionality that you need for your project design.

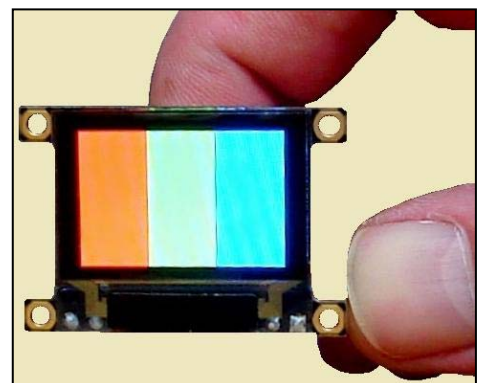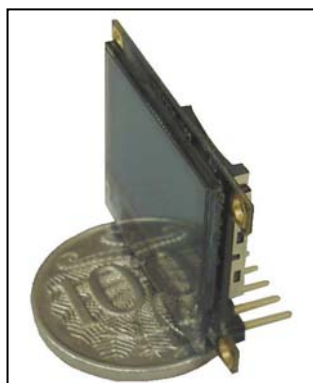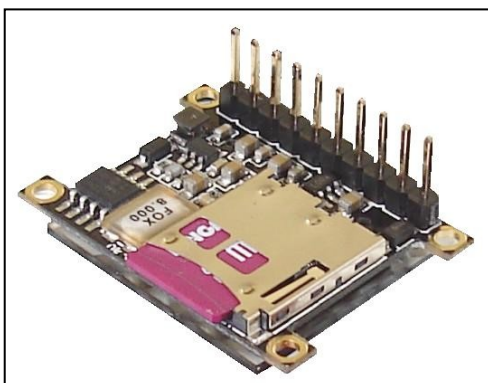

## 2 Features

The **μOLED-96-PROP** module is aimed at being integrated into a variety of different applications facilitating the designer to quickly and cost effectively complete a product and thus reduce 'time to market'. The module can also be used as a tiny development environment to explore the features of the Propeller chip and the OLED display technology.

- Propeller chip based design.
- 96 x 64 pixel resolution, 256 or 65K true to life colour OLED screen.
- 0.96" size diagonal OLED display. Module Size: 32.7 x 23 x 5.2mm.
- No backlighting with near 180° viewing angle.
- Low power design. Voltage supply from 3.3V to 6.3V external DC source.
- Simple 5 pin interface provides the programming interface and power to the Propeller chip, the OLED display and the μSD memory card.
- Four General Purpose Propeller I/O pins (plus dedicated Rx and Tx) available for interfacing additional devices.
- A single straight 10 pin male header provides access to power, programming interface and I/O pins.
- Application boards can be piggy-backed via the 10 pin header for an overall very small and low profile design.
- Onboard micro-SD (**μSD**) memory card adaptor can be used for storing Propeller programs, icons, images, animations, movie clips as well as data logging. 64Mb to 2Gig μSD memory cards can be purchased separately.
- Optional USB to Serial interface via the 4D micro-USB, **μUSB-MB5** or **μUSB-CE5** modules.
- Compatible with the Propeller Tool IDE for programming and user application development.
- Direct control of display functions using SPIN or Propeller Assembler code.

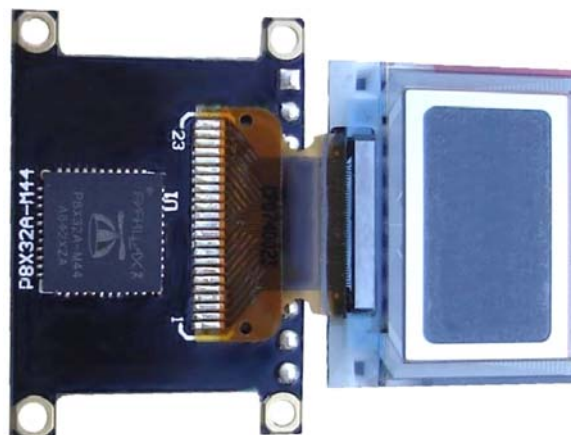


### 3 User Interface Pin Description

PIN	FUNCTION	DESCRIPTION
1	VCC	3.3 Volts to 6.3 Volts Supply Input.
2	Tx	Serial Transmit Pin (Data Out).
3	Rx	Serial Receive Pin (Data In).
4	GND	Ground.
5	Res	Module and Propeller RESET signal. Active Low.
6	3.3V	Regulated 3.3 Volts output.
7	P21	General Purpose Propeller I/O signal, P21.
8	P20	General Purpose Propeller I/O signal, P20.
9	P19	General Purpose Propeller I/O signal, P19.
10	P18	General Purpose Propeller I/O signal, P18.


These 5 pins match the same pins on the micro-USB modules, **μUSB-MB5** or **μUSB-CE5** for easy USB-Serial connectivity.


#### BACK VIEW

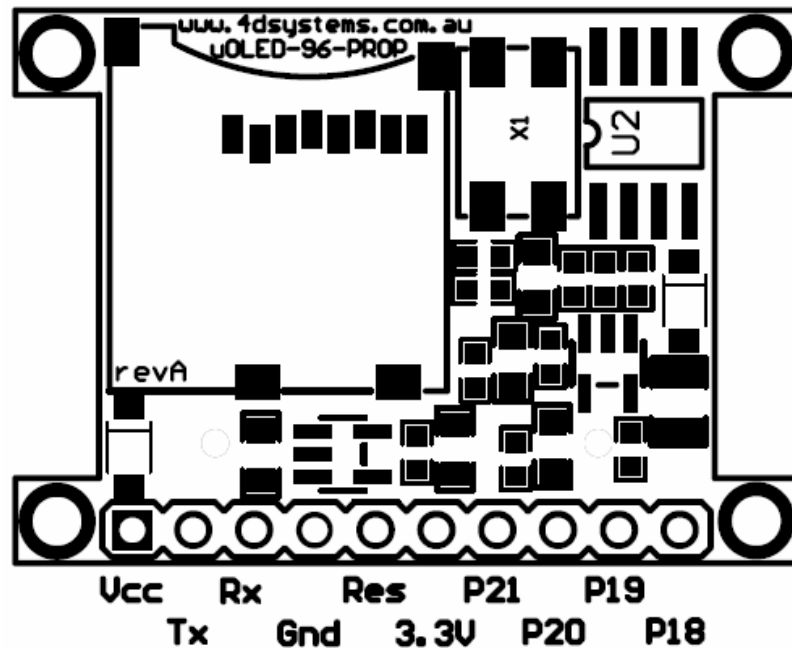

## 4 Circuit Diagram

The circuit diagram of the **μOLED-96-PROP** is shown below. Please note the dedicated signals of the Propeller chip used for controlling and interfacing to the OLED display.

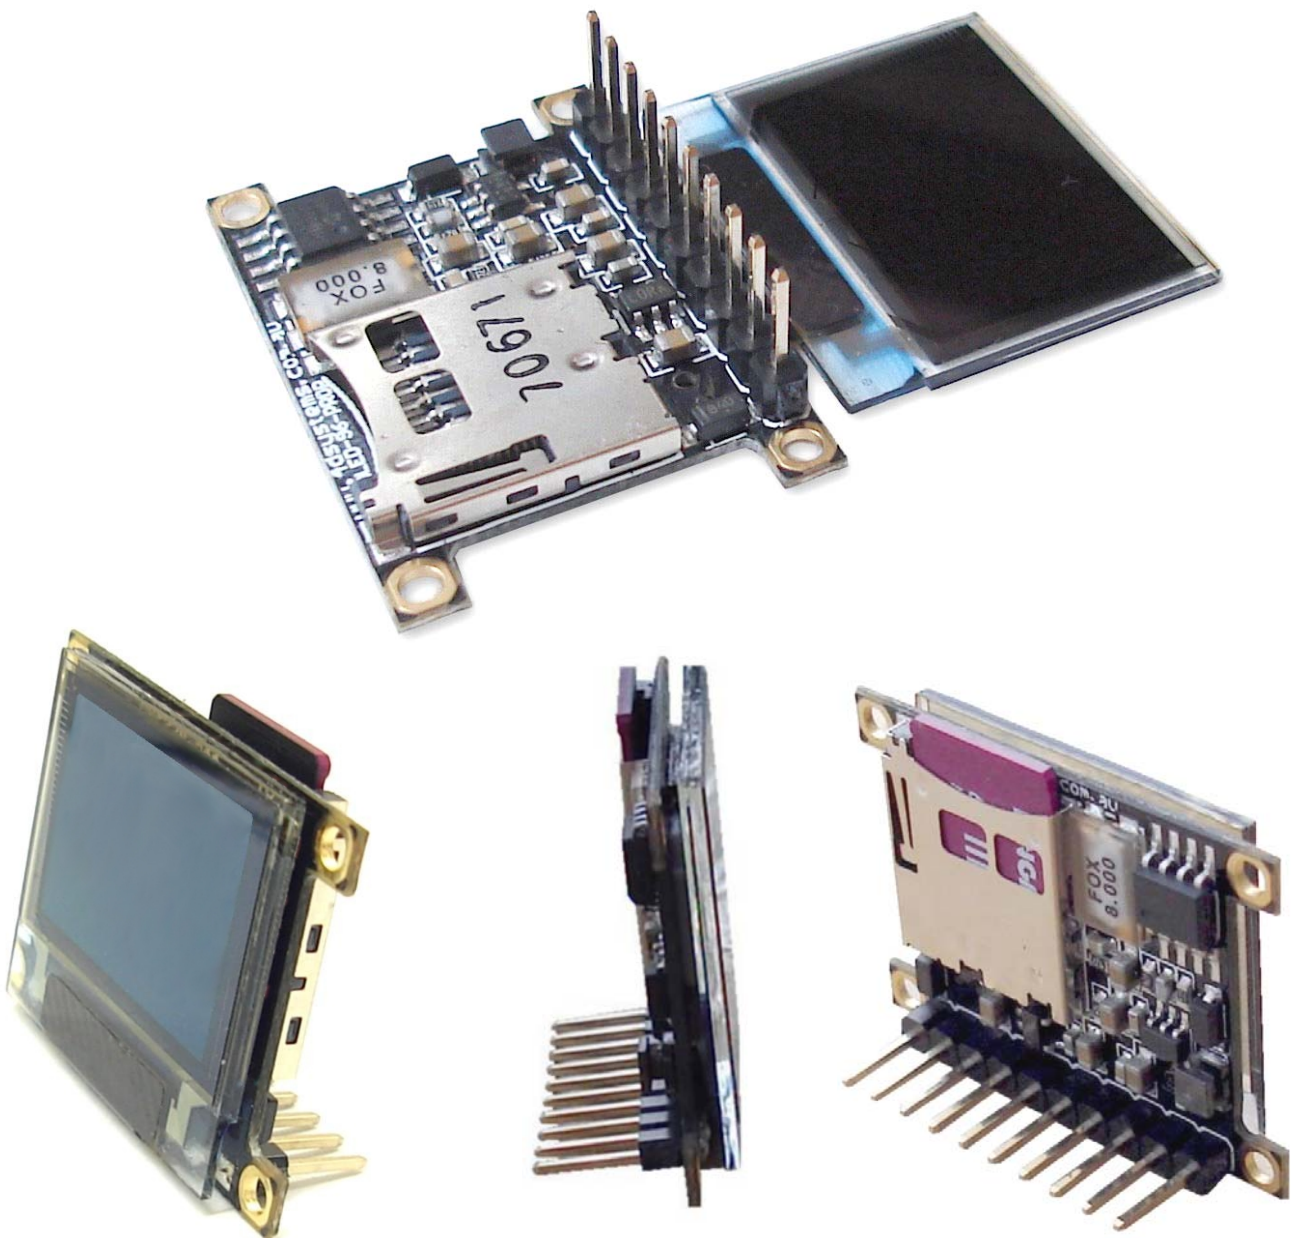

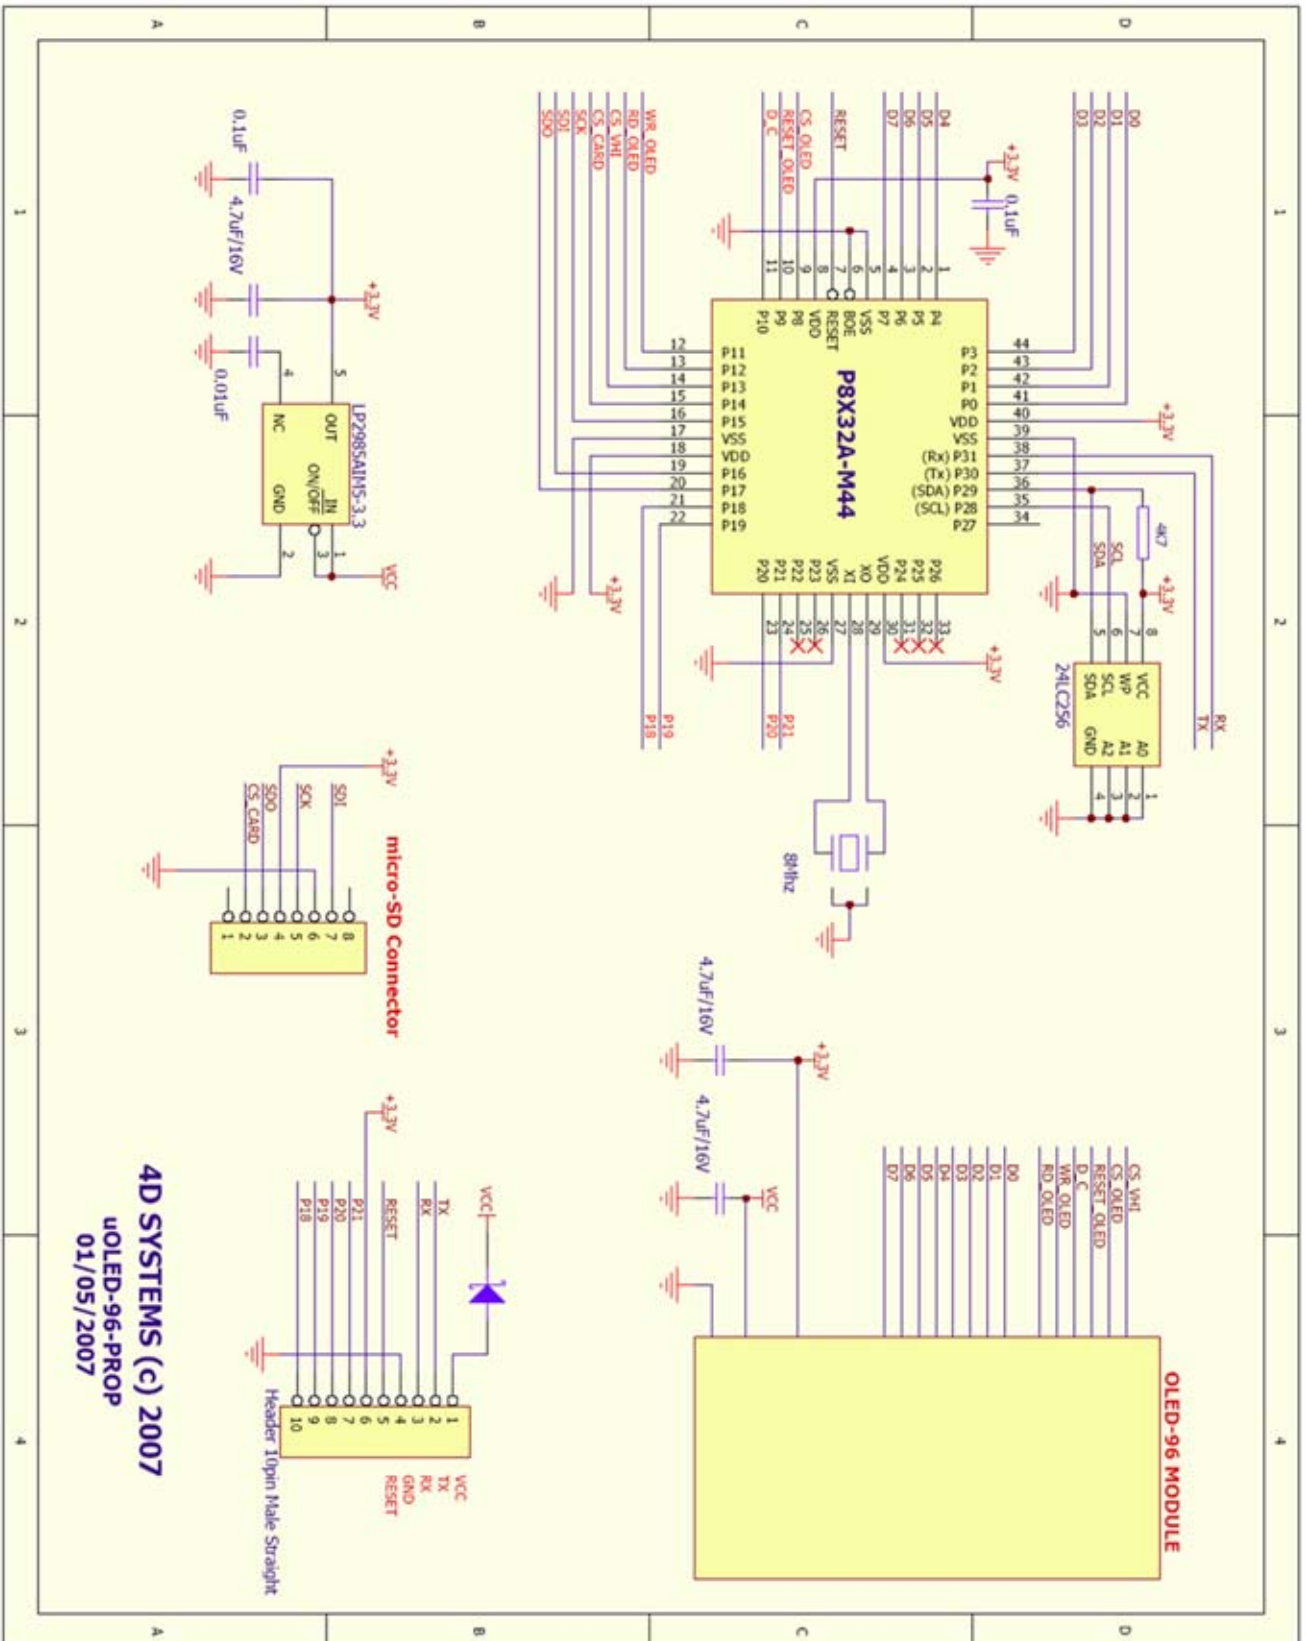





**μOLED-96-PROP**


## 5 Display Graphics Drivers - Object Code

The **μOLED-96-PROP** is supplied with “**uOLED-96-Prop.spin**” which is a prototype SPIN Object, a Propeller microcontroller code, that handles the display initialization and provides sample Methods for low-level graphics functions. It is intended as a shell, into which, you can further program and develop the functionality that you need for your project design.


Each method is also documented and explained in clear detail to help with further code development. Please visit [www.4dsystems.com.au/downloads/micro-OLED/uOLED-96-PROP/](http://www.4dsystems.com.au/downloads/micro-OLED/uOLED-96-PROP/) for the latest Object code drivers.

## 6 USB-Serial Interface



The **μOLED-96-PROP** module needs to be interfaced to a PC from time to time for uploading the Propeller chip with user application code. Using a standard USB cable and any one of the 4D Systems micro-USB modules (**μUSB-MB5** or **μUSB-CE5**) as shown below, a PC to **μOLED-96-PROP** connection can be achieved simply. The micro-USB module (optional extra), simply connects to the **μOLED-96-PROP** module and captures the USB data and converts it into serial TTL data. The micro-USB modules and drivers are available from your local 4D distributor. This is an optional extra product and is not included with the module.

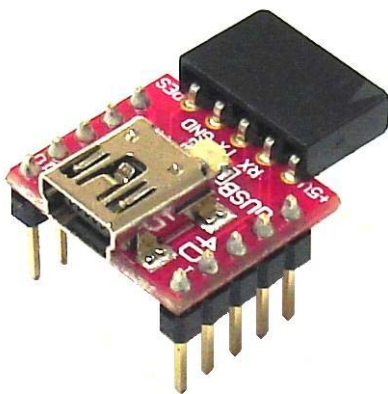


**μUSB-MB5**

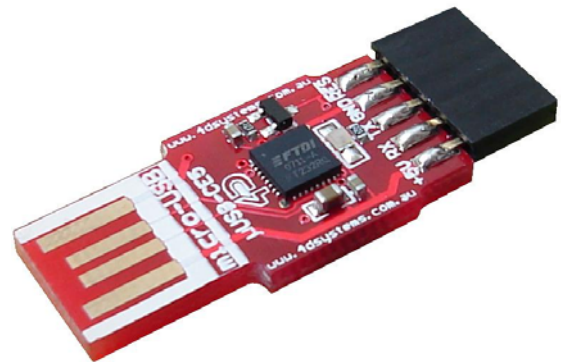

**μUSB-CE5**

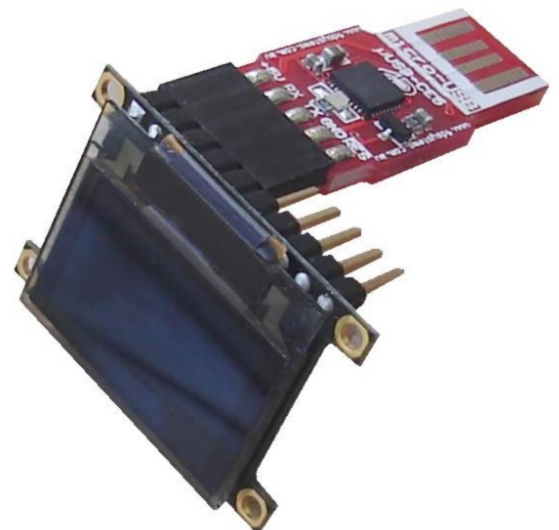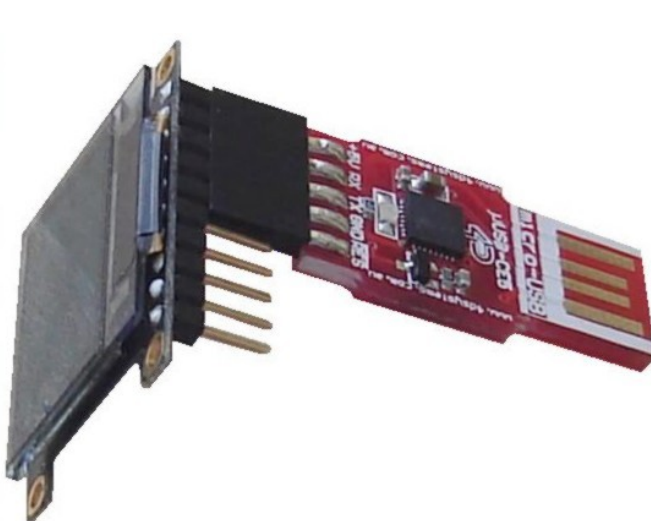

## 7 Mechanical Details

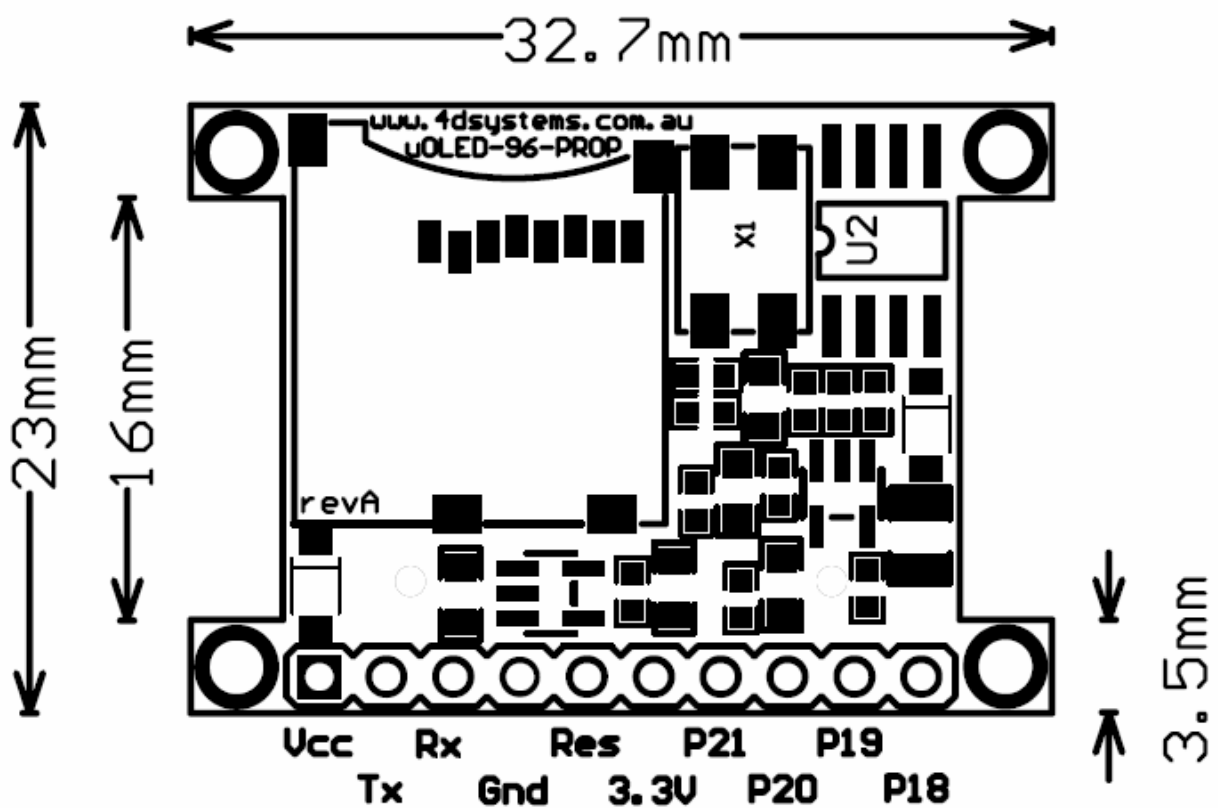

**BACK VIEW**

The μOLED-96-PROP module dimensions are 32.7mm x 23mm x 5.2mm.

## 8 Related Products

- **μUSB-MB5**

- micro-USB module, USB to Serial Bridge, CP2102 Chipset
- Standard USB miniB connector
- 10 pin header provides the following signals:
  - 5V, 3.3V, GND, Tx, Rx, Suspend,
  - DTR, CTS, RTS, GND
- 5 Volts supply @ 500mA, 3.3 Volts supply @ 100mA
- Additional flow control signals, DTR, CTS, RTS
- [www.4dsystems.com.au/downloads/micro-USB/uUSB-MB5/](http://www.4dsystems.com.au/downloads/micro-USB/uUSB-MB5/)



- **μUSB-CE5**

- micro-USB module, USB to Serial Bridge, FTDI Chipset
- Plugs directly into USB port
- 5 pin header provides the following signals:
  - 5V, Rx, Tx, GND, Reset
- 5 Volts supply @ 500mA
- [www.4dsystems.com.au/downloads/micro-USB/uUSB-CE5/](http://www.4dsystems.com.au/downloads/micro-USB/uUSB-CE5/)



- **Software Utility Tools (free download)**

- The Propeller Tool Software, a PC based IDE environment for developing SPIN and Propeller Assembler code can be downloaded from the Parallax website: [www.parallax.com](http://www.parallax.com)
- The Propeller Object Exchange contains many source code objects for the Propeller microcontroller. They are created and submitted by Propeller customers as well as Parallax engineers for use by everyone in the community. <http://obex.parallax.com/>



**μOLED-96-PROP**

## 9 Appendix

### 9.1 Help and Other Information:

- Assistance with latest information and downloads visit the 4D Systems products web-page of your local distributor or visit the 4D Systems website.
- Questions and technical support please visit the discussion forum at 4D website [www.4dsystems.com.au](http://www.4dsystems.com.au)
- All related product information can be downloaded from [www.4dsystems.com.au/downloads/micro-OLED/uOLED-96-PROP/](http://www.4dsystems.com.au/downloads/micro-OLED/uOLED-96-PROP/)