

PART NO.	NOMINAL SLEEVE LENGTH "A" REF.	INNER TUBE DIAMETER MIN. "B"	NOMINAL ROD DIAMETER "C"	RECOVERED DIAMETER "D" REF.	FIGURE NO.
*OFSP-10-25	.98 (25.0)	.06 (1.5)	.04 (1.0)	.09 (2.4)	1
*OFSP-10-30	1.18 (30.0)				
*OFSP-10-35	1.38 (35.0)				
*OFSP-10-40	1.57 (40.0)				
*OFSP-10-45	1.77 (45.0)				
*OFSP-10-61	2.40 (61.0)	.06 (1.5)	.06 (1.5)	.11 (2.8)	
*OFSP-15-40	1.57 (40.0)				
*OFSP-15-61	2.40 (61.0)	.02 (0.5)	.03 (0.8)	.06 (1.6)	
OFSP-08-25	.98 (25.0)				
OFSP-08-40	1.57 (40.0)	.14 X .04 (3.6 X 1.0)	.16 X .07 (4.0 X 1.8)	.20 X .12 (5.0 X 3.0)	
**ROFSP-40-40	1.57 (40.0)				

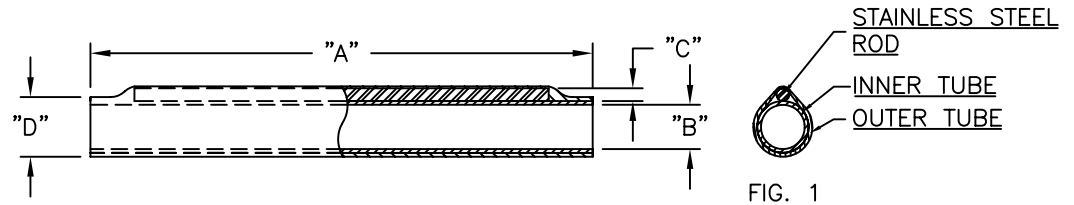


FIG. 1

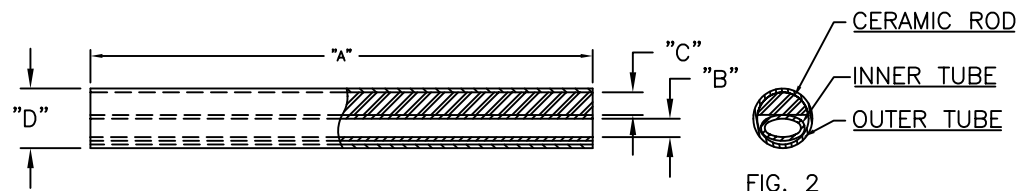


FIG. 2

NOTE:

- MATERIAL:**
 OUTER TUBE: HEATSHRINK 3:1 RATIO CROSS-LINKED MODIFIED POLYOLEFIN (RMS-225).
 INNER TUBE: MODIFIED PE COPOLYMER ADHESIVE (RMS-226).
 ROD: STAINLESS SPRING STEEL (RMS-227).
 COLOR: CLEAR.
- *BLACK (BLK), BROWN (BRN), GREEN (GRN), BLUE (BLU), LIGHT BLUE (LBL), YELLOW (YEL), RED (RED), PINK (PNK), ORANGE (ORG), VIOLET (VIO), GRAY (GRY) AND WHITE (WHT), AVAILABLE BY SPECIAL ORDER ONLY.
 TO ORDER, ADD COLOR SUFFIX TO PART NO.
- **MATERIAL:
 OUTER TUBE: HEATSHRINK 3:1 RATIO CROSS-LINKED MODIFIED POLYOLEFIN (RMS-225).
 INNER TUBE: MODIFIED PE COPOLYMER ADHESIVE (RMS-226).
 ROD: CERAMIC (RMS-170).
 COLOR: CLEAR.

TITLE: OPTICAL FIBER SPLICE PROTECTOR					DWG IN IN (MM)	
TOLERANCES UNLESS NOTED .XX=±.010 .XXX=±.005 FRAC=±1/64 ANG=±1°	FILE # OFSP	DWN: S.M.	APP:	FINAL		
	MAT'L: SEE NOTES	DT: 05/02/02	DT:	PART #		PRINT TYPE
	RE: RICHCO, INC.	RICHCO INC. PO BOX 804238, CHICAGO, 60680 (773) 539-4060		SEE TABLE		CA

REV	DESCRIPTION	ENGR DATE
D	SEE ECN #1319 FOR CHANGES	SK 04.19.07
C	FILE NO. WAS (R)OFSP	SM 05.14.02
B	CORRECTED PART NOS. FROM "-12" TO "-10"	SM 05.09.02
A	COMPLETELY REDRAWN AND ADDED NEW PART NO.'S	SM 05.02.02