



REV.	DESCRIPTION/ECO NO.	DATE
	RELEASE & CANCEL	1/3/03
	BXA-12553/KIT & BXA-12553/INV	

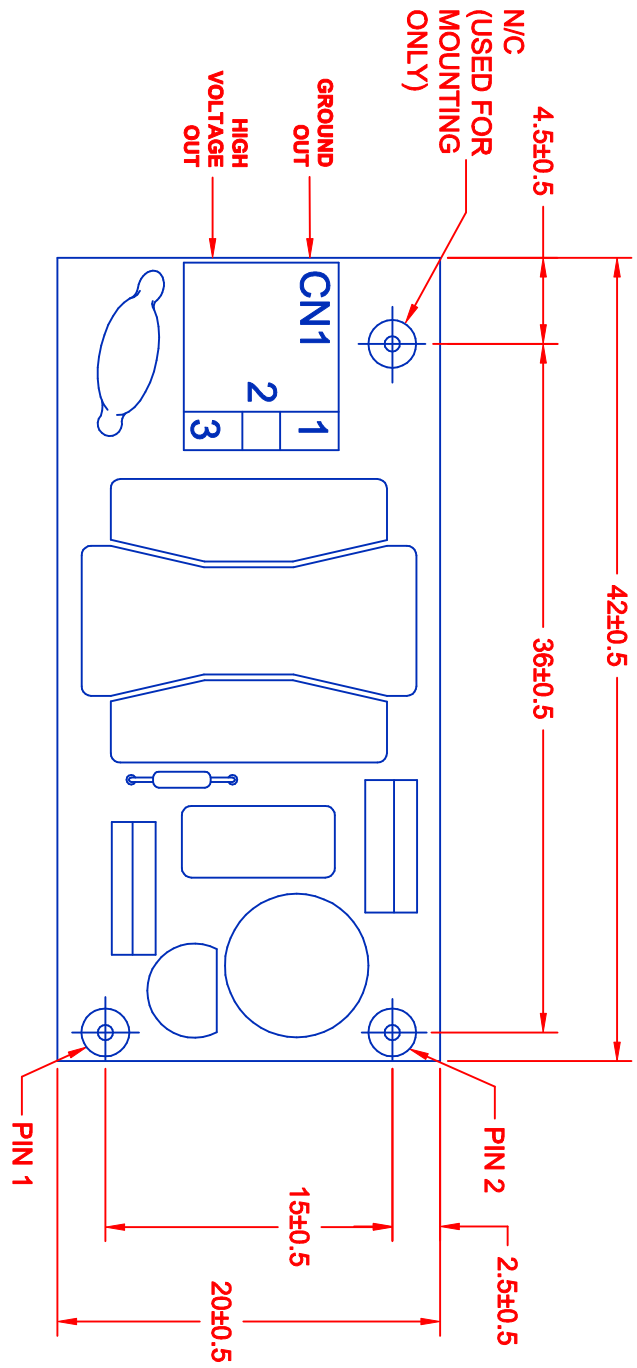

NOTE:
 MATING CONNECTOR IS NOT INCLUDED WITH INVERTER.
 JKL WIRE HARNESS PART NO. BXC-10566 CAN BE ORDERED SEPARATELY.

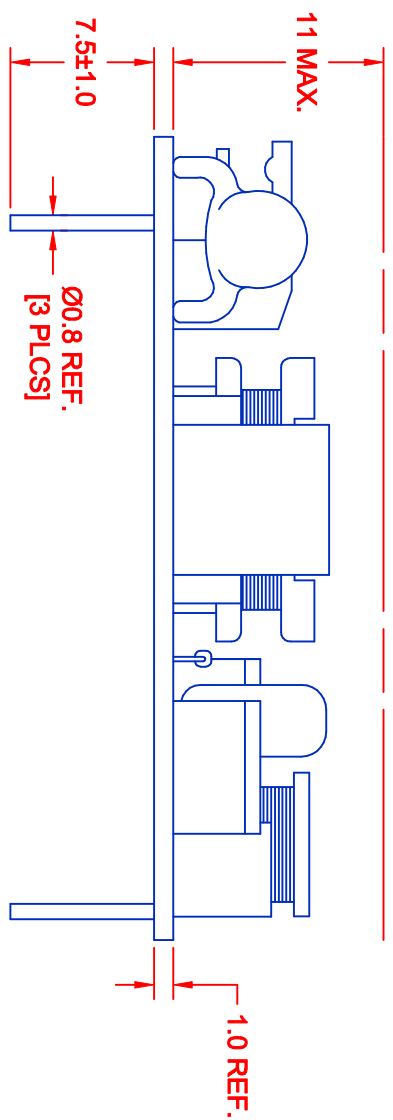

CN1 PIN #	TO LAMP
1	OUT GROUND
2	N/C
3	HIGH V

BOARD PIN #	INPUT
1	+V (V in)
2	V (GND)

CHARACTERISTICS	MIN	TYP	MAX
INPUT VOLTAGE: (vdc)	10.8	12.0	13.2
INPUT CURRENT: (mA)	----	180	250
OUTPUT VOLTAGE: (Vrms)	600	700	800
OUTPUT CURRENT (marms)	4.0	5.5	7.0
OUTPUT FREQUENCY: (kHz)	10	25	40
OPERATING TEMP: (CELSIUS)	0	25	50

METRIC DIMENSIONS ARE IN MILLIMETERS TOLERANCE UNLESS OTHERWISE SPECIFIED
 1 PL +/- 0.3
 2 PL +/- 0

THIRD ANGLE PROJECTION

JKL COMPONENTS CORPORATION

CCFL POWER SUPPLY

DRAWN BY L. WENGSTROM F.D. 1/3/03 DATE 1/3/03

APPR'D BY DATE

SCALE **A** SIZE **55335** FCQM NO. **55335** DRAWING NO. **BXA-12553**

MANUAL REVISIONS NOT PERMITTED

RELEASED DATE 1/3/03

REVISION DATE

REV. NO. SHEET OF