


REV.	DESCRIPTION/ECO NO.	DATE
	RELEASE AND CANCEL	2/7/03
	BXA503/KIT & BXA-503/INV	
A	OUTPUT CURRENT TO SINGLE	9/21/06

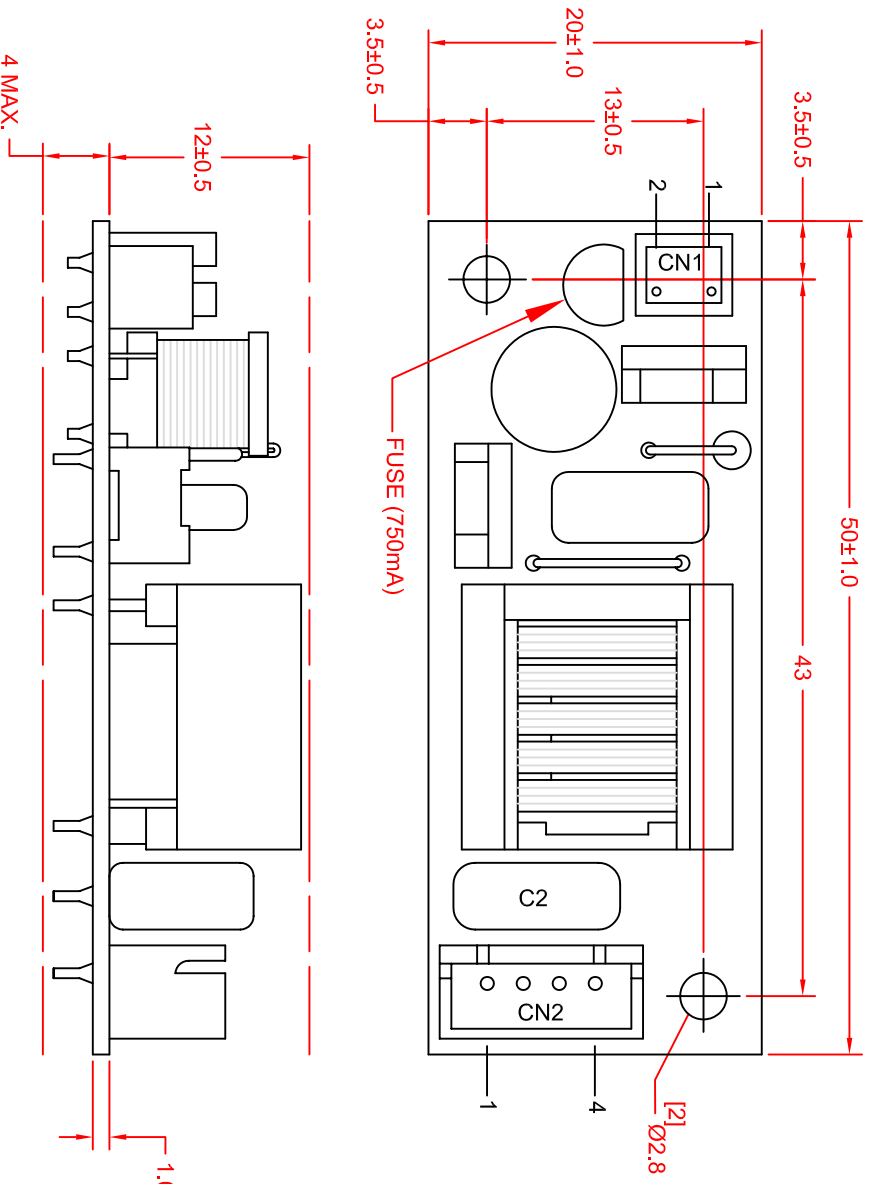

NO.	PIN NUMBER	JKL MATING WIRE HARNESS
CN1	1 INPUT (GND)	BXC-10574
	2 INPUT (+V)	
CN2	1 OUTPUT (HV/1)	BXC-10585
	2 NO CONNECTION	
	3	
	4 OUT LAMP (GND)	

OPERATING SPECIFICATIONS

CHARACTERISTICS	MIN	TYP	MAX
INPUT VOLTAGE: (vdc)	5.0	6.0	7.0
INPUT CURRENT: (mA)	150	350	700
OUTPUT VOLTAGE: (Vrms)	700	1200	1450
OUTPUT CURRENT: (mA)	3.0	5.0	6.5
OUTPUT FREQUENCY: (KHz)	30	35	40
OPERATING TEMP: (CELSIUS)	-	25	-

NOTE:  
MATING CONNECTORS ARE NOT INCLUDED WITH INVERTER.  
JKL WIRE HARNESS BXC-10574 AND BXC-10585 CAN BE ORDERED SEPARATELY.

<p><b>METRIC</b></p>		<p>DIMENSIONS ARE IN MILLIMETERS</p> <p>TOLERANCE UNLESS OTHERWISE SPECIFIED</p> <p>1 PL +/- 0.3</p> <p>2 PL +/-</p> <p>ANGLE +/- 0</p>	
<p>THIRD ANGLE PROJECTION</p>	<p>THIRD ANGLE PROJECTION</p>	<p>DRAWN BY L. WENGSTROM</p> <p>APP'D BY E.D.</p> <p>DATE 9/21/06</p>	<p>DATE 9/21/06</p>
<p>TITLE</p> <p><b>JKL COMPONENTS CORPORATION</b></p> <p>CCFL SINGLE OUTPUT INVERTER</p>		<p>SIZE <b>A</b></p> <p>FSCM NO. <b>55335</b></p>	<p>DRAWING NO. <b>BXA-503</b></p>
<p>MANUAL REVISIONS NOT PERMITTED</p>		<p>SCALE NONE</p>	<p>RELEASED DATE 2/7/03</p>
<p>- CAD DRAWING -</p>		<p>REV. NO. <b>A</b></p>	<p>REVISION DATE 9/21/06</p>
<p>REVISIONS NOT PERMITTED</p>		<p>REV. NO. <b>A</b></p>	<p>SHEET OF</p>