



Designed specifically for world market applications, the B-series utilizes the hydraulic magnetic principle which provides precise operation and performance even when exposed to extremely hot and/or cold application environments.

Typical applications include power supplies, medical equipment, office equipment, control panels and marine equipment. In addition, these breakers meet CSA Standard 22.2 No. 100 for the Generator & Welder markets.

1-6 poles, 0.02 - 50 amps, up to 277 VAC or 80 VDC, with choice of time delays, terminals and actuator colors.

Agency Certifications

UL Recognized

UL Standard 1077



Component Recognition Program as Protectors Supplementary (Guide CCN/QVNU2, File E75596)

UL Standard 508



Switches, Industrial Control (Guide CCN/NRNT2, File E148683)

UL Standard 1500



Protectors, Supplementary for Marine Electrical & Fuel Systems (Guide PEQZ2, File E75596) Ignition Protection

UL Listed

UL Standard 489



Circuit Breakers, Molded Case, (Guide DIVQ, File E189195)

UL Standard 489A



Communications Equipment (Guide CCN/DITT, File E189195)

CSA Accepted



Component Supplementary Protector under Class 3215 30, File 047848 0 000 CSA Standard C22.2 No. 235

TUV Certified



EN60934, under License No. R72040875

VDE Certified



EN60934, VDE 0642 under File No. 10537

Electrical

Table A: Lists UL Recognized & CSA Certified configurations and performance capabilities as a Component Supplementary Protector.

| B -SERIES TABLE A: COMPONENT SUPPLEMENTARY PROTECTORS | | | | | | | | | | |
|---|-------------|-----------|-------------------|-------------------|----------------------|-------------------------------|---------------------|-------------------|---------------|--------------------|
| CIRCUIT CONFIGURATION | VOLTAGE | | | CURRENT RATING | | SHORT CIRCUIT CAPACITY (AMPS) | | APPLICATION CODES | | CONSTRUCTION NOTES |
| | MAX. RATING | FREQUENCY | PHASE | FULL LOAD AMPS | GENERAL PURPOSE AMPS | UL/CSA | | UL | CSA | |
| | | | | | | WITH BACKUP FUSE | WITHOUT BACKUP FUSE | | | |
| SERIES | 65 | DC | --- | 31 - 50 | --- | --- | 7500 | TC1,2, OL1,U1 | TC1,2, OL1,U1 | |
| | 80 | DC | --- | 0.02 - 30 | --- | --- | 7500 | TC1,2, OL1,U1 | TC1,2, OL1,U1 | |
| | | | | --- | 31 - 50 | --- | 7500 | TC1,2, OL0,U1 | TC1,2, OL0,U1 | |
| | 125 | 50 / 60 | 1 | 1 - 50 | --- | --- | 2000 | TC1, OL1,U2 | TC1, OL1,U2 | |
| | 125 | 50 / 60 | 1 ⁴ | 1 - 50 | --- | --- | 1000 | TC1, OL1,U2 | TC3, OL1,U3 | |
| | 125 / 250 | 50 / 60 | 1 ³ | 0.02 - 30 | --- | --- | 3000 | TC1,2, OL1,U1 | TC1,2, OL1,U1 | |
| | 250 | 50 / 60 | 1 | 0.02 - 30 | --- | --- | 1500 | TC1, OL0,U2 | TC1, OL0,U2 | Single Pole Break |
| | | | | 0.02 - 30 | --- | --- | 3000 | TC1, OL1,U2 | TC1, OL1,U2 | Two Pole Break |
| | | | | --- | 31 - 50 | --- | 3000 | TC1,2, OL0,U1 | TC1,2, OL0,U1 | |
| | | | 1 ⁴ | 1 - 50 | --- | 1000 | TC1, OL1,U2 | TC3, OL1,U3 | | |
| 3 | 0.02 - 30 | --- | 5000 ² | --- | TC1,2, OL1,C1 | TC1,2, OL1,C1 | | | | |
| | | | 31 - 50 | --- | 2000 ¹ | --- | TC1,2, OL1,C1 | TC1,2, OL1,C1 | | |
| 277 | 50 / 60 | 1 | 0.02 - 30 | --- | 5000 ¹ | --- | TC1,2, OL1,C1 | TC1,2, OL1,C1 | | |
| DUAL COIL | 65 | DC | --- | 0.02 - 50 | --- | --- | 7500 | TC1,2, OL1,U1 | TC1,2, OL1,U1 | |
| | 80 | DC | --- | 0.02 - 30 | --- | --- | 7500 | TC1,2, OL1,U1 | TC1,2, OL1,U1 | |
| | | | | --- | 31 - 50 | --- | 7500 | TC1,2, OL0,U1 | TC1,2, OL0,U1 | |
| | 125 | 50 / 60 | 1 | 1 - 50 | --- | --- | 2000 | TC1, OL1,U2 | TC1, OL1,U2 | |
| | 125 / 250 | 50 / 60 | 1 ³ | 0.02 - 30 | --- | --- | 3000 | TC1,2, OL1,U1 | TC1,2, OL1,U1 | |
| | 250 | 50 / 60 | 1 | 0.02 - 30 | --- | --- | 1500 | TC1, OL0,U2 | TC1, OL0,U2 | Single Pole Break |
| | | | | 0.02 - 30 | --- | --- | 3000 | TC1, OL1,U2 | TC1, OL1,U2 | Two Pole Break |
| | | | | --- | 31 - 50 | --- | 3000 | TC1,2, OL0,U1 | TC1,2, OL0,U1 | |
| | | | 1 ⁴ | 1 - 50 | --- | 1000 | TC1, OL1,U2 | TC3, OL1,U3 | | |
| | 3 | 0.02 - 30 | --- | 5000 ² | --- | TC1,2, OL1,C1 | TC1,2, OL1,C1 | | | |
| | | | 31 - 50 | --- | 2000 ¹ | --- | TC1,2, OL1,C1 | TC1,2, OL1,C1 | | |
| 277 | 50 / 60 | 1 | 0.02 - 30 | --- | 5000 ¹ | --- | TC1,2, OL1,U1 | TC1,2, OL1,U1 | | |
| SHUNT | 80 | DC | --- | 0.02 - 30 | --- | --- | 7500 | TC1,2, OL1,U1 | TC1,2, OL1,U1 | |
| | 125 / 250 | 50 / 60 | 1 ³ | 0.02 - 30 | --- | --- | 3000 | TC1,2, OL1,U1 | TC1,2, OL1,U1 | |
| | 250 | 50 / 60 | 1 | 0.02 - 30 | --- | --- | 3000 | TC1,2, OL1,U1 | TC1,2, OL1,U1 | |
| | | | | 0.02 - 30 | --- | 5000 ² | --- | TC1,2, OL1,C1 | TC1,2, OL1,C1 | |
| | 277 | 50 / 60 | 1 | 0.02 - 30 | --- | 5000 ¹ | --- | TC1,2, OL1,C1 | TC1,2, OL1,C1 | |
| RELAY | 80 | DC | --- | 0.02 - 30 | --- | --- | 7500 | TC1,2, OL1,U1 | TC1,2, OL1,U1 | |
| | 125 / 250 | 50 / 60 | 1 ³ | 0.02 - 30 | --- | --- | 3000 | TC1,2, OL1,U1 | TC1,2, OL1,U1 | |
| | 250 | 50 / 60 | 1 | 0.02 - 30 | --- | --- | 3000 | TC1,2, OL1,U1 | TC1,2, OL1,U1 | |
| | | | | 0.02 - 30 | --- | 5000 ² | --- | TC1,2, OL1,C1 | TC1,2, OL1,C1 | |
| | 277 | 50 / 60 | 1 | 0.02 - 30 | --- | 5000 ¹ | --- | TC1,2, OL1,C1 | TC1,2, OL1,C1 | |
| SWITCH ONLY | 65 | DC | --- | 0.02 - 50 | --- | --- | --- | --- | --- | |
| | 80 | DC | --- | 0.02 - 30 | --- | --- | --- | --- | --- | |
| | | | | --- | 31 - 50 | --- | --- | --- | --- | |
| | 250 | 50 / 60 | 1 | 0.02 - 30 | --- | --- | --- | --- | --- | |
| 3 | | | | 0.02 - 50 | --- | --- | --- | --- | | |
| 277 | 50 / 60 | 1 | 0.02 - 30 | 31 - 50 | --- | --- | --- | --- | | |

Notes for Table A:

- 1 Requires branch circuit backup with a UL LISTED Type K5 or RK5 fuse (15A minimum) at no more than 4 times the rating of the protector.
- 2 Same as note 1, except that backup fuse is limited to 80A maximum.
- 3 2 pole protector required (with one pole per power line) for: 250/125 VAC, 125/250 VAC and 208Y/120 VAC Power Systems. 1 pole protector required for: 125 VAC, 1Ø Power System.

Electrical

Table B: Lists UL Recognized, CSA, VDE & TUV Certified configurations & performance capabilities as a Component Supplementary Protector.

| B-SERIES TABLE B: COMPONENT SUPPLEMENTARY PROTECTORS | | | | | | | | | | | | | | | | |
|--|-------------|-----------|-----------|----------------|-----------------------------------|-------------------------------|---------------------|------------------------|----------------------|------------------------|----------------------|-------------------|---------------|--------------------|---------------|--|
| CIRCUIT CONFIGURATION | VOLTAGE | | | CURRENT RATING | | SHORT CIRCUIT CAPACITY (AMPS) | | | | | | APPLICATION CODES | | CONSTRUCTION NOTES | | |
| | MAX. RATING | FREQUENCY | PHASE | FULL LOAD AMPS | GENERAL PURPOSE AMPS ¹ | UL/CSA | | VDE | | TUV | | UL | CSA | | | |
| | | | | | | WITH BACKUP FUSE | WITHOUT BACKUP FUSE | (Inc) WITH BACKUP FUSE | (Inc) WITHOUT BACKUP | (Inc) WITH BACKUP FUSE | (Inc) WITHOUT BACKUP | | | | | |
| SERIES | 80 | DC | --- | 0.10 - 30 | --- | --- | 7500 | 3000 | 1500 | 3000 | 1500 | TC1,2, OL1,U1 | TC1,2, OL1,U1 | | | |
| | | | | 31 - 50 | 31 - 50 | --- | 7500 | 3000 | 1500 | 3000 | 1500 | TC1,2, OL0,U1 | TC1,2, OL0,U1 | | | |
| | | | | 0.10 - 30 | --- | --- | 7500 | 3000 | 1500 | 3000 | 1500 | TC1,2, OL1,U1 | TC1,2, OL1,U1 | | | |
| | | | | 31 - 32 | --- | --- | 7500 | 3000 | 1500 | 3000 | 1500 | TC1,2, OL1,U1 | TC1,2, OL1,U1 | | | |
| | | | | 31 - 50 | 31 - 50 | --- | 7500 | 3000 | 1500 | 3000 | 1500 | TC1,2, OL0,U1 | TC1,2, OL0,U1 | | | |
| | | | | 0.10 - 30 | --- | --- | 3000 | 3000 | 1500 | 5000 | 1500 | TC1,2, OL1,U1 | TC1,2, OL1,U1 | | | |
| | 250 | 50 / 60 | 1 | 0.10 - 30 | --- | --- | 3000 | --- | --- | 5000 | 1500 | TC1,2, OL0,U1 | TC1,2, OL0,U1 | | | |
| | | | | 31 - 50 | 31 - 50 | --- | 3000 | --- | --- | 5000 | 1500 | TC1,2, OL0,U1 | TC1,2, OL0,U1 | | | |
| | | | | 31 - 32 | --- | --- | 3000 | 6000 | 1500 | 5000 | 1500 | TC1,2, OL1,U1 | TC1,2, OL1,U1 | | | |
| | | | | 0.10 - 30 | --- | --- | 1500 | 3000 | 1500 | 5000 | 1500 | TC1, OL0,U2 | TC1, OL0,U2 | Single Pole Break | | |
| | | | | 0.10 - 30 | --- | --- | 3000 | 3000 | 1500 | 5000 | 1500 | TC1, OL1,U2 | TC1, OL1,U2 | Two Pole Break | | |
| | | | | 0.10 - 30 | --- | --- | 5000 ³ | --- | 3000 | 1500 | 3000 | 1500 | TC1,2, OL1,C1 | TC1,2, OL1,C1 | | |
| 415 | 50 / 60 | 3 | 0.10 - 30 | --- | --- | 1000 | 3000 | 1500 | 3000 | 1500 | TC1,2, OL1,C1 | TC1,2, OL1,C1 | | | | |
| DUAL COIL | 80 | DC | --- | 0.10 - 30 | --- | --- | 7500 | 3000 | 1500 | 3000 | 1500 | TC1,2, OL1,U1 | TC1,2, OL1,U1 | | | |
| | | | | 0.10 - 30 | --- | --- | 3000 | 3000 | 1500 | 5000 | 1500 | TC1,2, OL1,U1 | TC1,2, OL1,U1 | | | |
| | | | | 30 - 50 | 31 - 50 | --- | 3000 | --- | --- | 5000 | 1500 | TC1,2, OL0,U1 | TC1,2, OL0,U1 | | | |
| | 250 | 50 / 60 | 1 | 0.10 - 30 | --- | --- | 5000 ³ | --- | --- | 3000 | 1500 | 3000 | 1500 | TC1,2, OL1,C1 | TC1,2, OL1,C1 | |
| | | | | 31 - 50 | --- | --- | 2000 ² | --- | --- | 3000 | 1500 | TC1,2, OL1,C1 | TC1,2, OL1,C1 | | | |
| | | | | 0.10 - 30 | --- | --- | 3000 | 3000 | 1500 | 5000 | 1500 | TC1,2, OL1,U1 | TC1,2, OL1,U1 | | | |
| SHUNT | 80 | DC | --- | 0.10 - 30 | --- | --- | 7500 | 3000 | 1500 | 3000 | 1500 | TC1,2, OL1,U1 | TC1,2, OL1,U1 | | | |
| | | | | 0.10 - 30 | --- | --- | 7500 | 3000 | 1500 | 3000 | 1500 | TC1,2, OL1,U1 | TC1,2, OL1,U1 | | | |
| | | | | 0.10 - 30 | --- | --- | 3000 | 3000 | 1500 | 5000 | 1500 | TC1,2, OL1,U1 | TC1,2, OL1,U1 | | | |
| | 250 | 50 / 60 | 1 | 30 - 50 | 31 - 50 | --- | 3000 | --- | --- | 5000 | 1500 | TC1,2, OL0,U1 | TC1,2, OL0,U1 | | | |
| | | | | 0.10 - 30 | --- | --- | 5000 ³ | --- | --- | 3000 | 1500 | 3000 | 1500 | TC1,2, OL1,C1 | TC1,2, OL1,C1 | |
| | | | | 31 - 50 | --- | --- | 2000 ² | --- | --- | --- | 3000 | 1500 | TC1,2, OL1,C1 | TC1,2, OL1,C1 | | |

Notes for Table B:

- 1 General Purpose Ratings for UL/CSA Only.
- 2 Requires branch circuit backup with a UL LISTED Type K5 or RK5 fuse (15A minimum) at no more than 4 times the rating of the protector.
- 3 Same as note 1, except that backup fuse is limited to 80 A maximum.

Table C: Lists UL Recognized, CSA Certified configurations and performance capabilities as Protectors, Supplementary for Marine Electrical and Fuel Systems (CCN/Guide PEQZ2, File E75596). Ignition Protected per UL 1500. UL Classified Small Craft Electrical Devices, Marine in accordance with ISO 8846 (CCN/Guide UZMK, File MQ1515) as Marine Supplementary Protectors.

| B-SERIES TABLE C: UL1500 (Marine Ignition Protected) | | | | | | | |
|--|-----------------|-----------|----------------|----------------|-------------------------------|-------------------|--------------|
| CIRCUIT CONFIGURATION | VOLTAGE | | | CURRENT RATING | SHORT CIRCUIT CAPACITY (AMPS) | APPLICATION CODES | |
| | MAX. RATING | FREQUENCY | PHASE | FULL LOAD AMPS | WITHOUT BACKUP FUSE | UL | CSA |
| SERIES | 14 ¹ | DC | --- | 0.02 - 50 | 5000 | TC1,2,OL1,U1 | TC1,2,OL1,U1 |
| | 32 ¹ | DC | --- | 0.02 - 50 | 5000 | TC1,2,OL1,U2 | TC1,2,OL1,U2 |
| | 65 | DC | --- | 0.02 - 50 | 3000 | TC1,2,OL1,U1 | TC1,2,OL1,U1 |
| | 125 / 250 | 50 / 60 | 1 ² | 0.02 - 50 | 1500 | TC1,2,OL1,U1 | TC1,2,OL1,U1 |
| | 250 | 50 / 60 | 1 | 0.02 - 30 | 1000 | TC1,2,OL1,U1 | TC1,2,OL1,U1 |

Notes for Table C:

- 1 Available with special catalog number only (consult factory).
- 2 2 pole protector required (with one pole per power line) for: 250/125 VAC, 125/250 VAC and 208Y/120 VAC Power Systems. 1 pole protector required for: 125 VAC, 1Ø Power System.

Table D: Lists UL Listed configurations and performance capabilities as Circuit Breakers for use in Communications Equipment (CCN/Guide DITT, File E189195), under UL489A

| B-SERIES TABLE D: UL489A (COMMUNICATIONS EQUIPMENT) | | | | |
|---|-------------|-----------|----------------------|------------------------------|
| CIRCUIT CONFIGURATION | VOLTAGE | | CURRENT RATING | INTERRUPTING CAPACITY (AMPS) |
| | MAX. RATING | FREQUENCY | GENERAL PURPOSE AMPS | WITHOUT BACKUP FUSE |
| SERIES | 80 | DC | 0.10 - 50 | 5000 |
| | 80 | DC | 60 - 90 ¹ | 5000 |


Notes for Table D:

- 1 60 - 90 amp ratings require parallel pole construction

Electrical



Maximum Voltage 277VAC 50/60 Hz, 80VDC
 Current Ratings Standard current coils: 0.100, 0.250, 0.500, 0.750, 1.00, 2.50, 5.00, 7.50, 10.0, 15.0, 20.0, 25.0, 30.0, 35.0, 40.0 and 50.0 amps. Other ratings available, see ordering scheme.
 Standard Voltage Coils DC - 6V, 12V; AC - 120V, other ratings available, see ordering scheme.
 Auxiliary Switch Rating SPDT; 10.1 AMPS - 250VAC, 1.0A 65 VDC or 0.5A 80 VDC, 0.1 Amps - 125VAC (with gold contacts). VDE-1.0 Amp - 125VAC.
 Insulation Resistance Minimum of 100 Megohms at 500 VDC.
 Dielectric Strength UL, CSA - 1500 V 50/60 Hz for one minute between all electrically isolated terminals. B-Series circuit breakers comply with the 8mm spacing and 3750V 50/60 Hz dielectric requirements from hazardous voltage to operator accessible surfaces, between adjacent poles and from main circuits to auxiliary circuits per Publications EN 60950 and VDE 0805.
 Resistance, Impedance Values from Line to Load Terminal - based on Series Trip Circuit Breaker.

RESISTANCE, IMPEDANCE VALUES from Line to Load Terminals (Values Based on Series Trip Circuit Breaker)

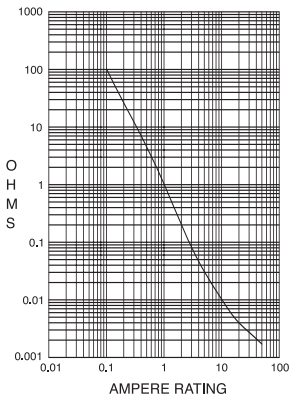

| CURRENT (AMPS) | TOLERANCE (%) |
|----------------|---------------|
| 0.10 - 5.0 | 15% |
| 5.1 - 20.0 | 25% |
| 20.1 - 50.0 | 35% |

Pulse Tolerance Curves



Mechanical

Endurance 10,000 ON-OFF operations @ 6 per minute; with rated Current and Voltage.
 Trip Free All B-Series Circuit Breakers will trip on overload, even when Handle is forcibly held in the ON position.
 Trip Indication The operating Handle moves positively to the OFF position when an overload causes the breaker to trip.


Physical

Number of Poles 1 - 6 poles at 30 Amps or less. 1 and 2 poles at 31 Amps thru 50 Amps.
 Internal Circuit Config. Series, (with or without auxiliary switch), Shunt and Relay with current or voltage trip coils, Dual Coil, Switch Only (with or without auxiliary switch).
 Weight Approximately 65 grams/pole. (Approximately 2.32 ounces/pole.)
 Standard Colors Housing- Black; Actuator - See Ordering Scheme.

Environmental

Designed and tested in accordance with requirements of specification MIL-PRF- 55629 and MIL-STD-202 as follows:

Shock Withstands 100 Gs, 6ms, sawtooth while carrying rated current per Method 213, Test Condition "I". Instantaneous and ultra-short curves tested @ 90% of rated current.
 Vibration Withstands 0.060" excursion from 10-55 Hz, and 10 Gs 55-500 Hz, at rated current per Method 204C, Test Condition A. Instantaneous and ultrashort curves tested at 90% of rated current.
 Moisture Resistance Method 106D, i.e., ten 24-hour cycles @ + 25°C to +65°C, 80-98% RH.
 Salt Spray Method 101, Condition A (90-95% RH @ 5% NaCl Solution, 96 hrs).
 Thermal Shock Method 107D, Condition A (Five cycles @ -55°C to +25°C to +85°C to +25°C).
 Operating Temperature -40° C to +85° C

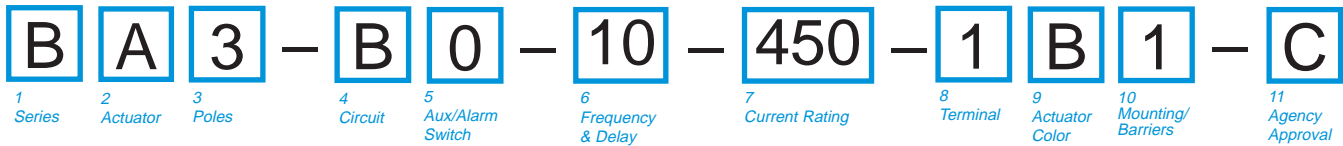

| | | | |
|---|--|------------------|--|
| 1 SERIES | | | |
| B | | | |
| 2 ACTUATOR¹ | | | |
| A | Handle, one per pole | | |
| B | Handle, one per multipole unit | | |
| S | Mid-Trip Handle, one per pole | | |
| T | Mid-Trip Handle, one per pole & Alarm Switch | | |
| 3 POLES | | | |
| 1 | One | | |
| 2 | Two | | |
| 3 | Three | | |
| 4 | Four | | |
| 5 | Five | | |
| 6 | Six | | |
| 4 CIRCUIT | | | |
| A ² | Switch Only (No Coil) | G ³ | Relay Trip (Voltage) |
| B | Series Trip (Current) | H ^{3,4} | Dual Coil with Shunt Trip Voltage Coil |
| C | Series Trip (Voltage) | J ^{3,4} | Dual Coil with Shunt Trip Voltage Coil (side terminal) |
| D ³ | Shunt Trip (Current) | K ^{3,4} | Dual Coil with Relay Trip Voltage Coil |
| E ³ | Shunt Trip (Voltage) | | |
| F ³ | Relay Trip (Current) | | |
| 5 AUXILIARY/ALARM SWITCH⁵ | | 5 | S.P.S.T., 0.093 Q.C. w/o Aux Switch |
| 0 | w/o Aux Switch | 6 | S.P.S.T., 0.139 Solder Lug |
| 1 | S.P.D.T., 0.093 Q.C. Term. | 7 | S.P.S.T., 0.110 Q.C. Term. |
| 2 | S.P.D.T., 0.110 Q.C. Term. | 8 | S.P.S.T., 0.187 Q.C. Term. (Gold Contacts) |
| 3 | S.P.D.T., 0.139 Solder Lug | 9 | S.P.D.T., 0.187 Q.C. Term. (Gold Contacts) |
| 4 | S.P.D.T., 0.110 Q.C. Term. (Gold Contacts) | | |
| 6 FREQUENCY & DELAY | | 30 | DC, 50/60Hz Instantaneous |
| 03 ² | DC 50/60Hz, Switch Only | 31 | DC, 50/60Hz Ultra Short |
| 10 ⁶ | DC Instantaneous | 32 | DC, 50/60Hz Short |
| 11 | DC Ultra Short | 34 | DC, 50/60Hz Medium |
| 12 | DC Short | 36 | DC, 50/60Hz Long |
| 14 | DC Medium | 42 ⁷ | 50/60Hz Short, Hi-Inrush |
| 16 | DC Long | 44 ⁷ | 50/60Hz Medium, Hi-Inrush |
| 20 ⁶ | 50/60Hz Instantaneous | 46 ⁷ | 50/60Hz Long, Hi-Inrush |
| 21 | 50/60Hz Ultra Short | 52 ⁷ | DC, Short, Hi-Inrush |
| 22 | 50/60Hz Short | 54 ⁷ | DC, Medium, Hi-Inrush |
| 24 | 50/60Hz Medium | 56 ⁷ | DC, Long, Hi-Inrush |
| 26 | 50/60Hz Long | | |

Notes:

- Actuator Code:
A: Handle tie pin spacer(s) and retainers provided unassembled with multi-pole units.
B: Handle location as viewed from front of breaker:
2 pole - left pole
4 pole - two handles at center poles
6 pole - four handles at center poles
3 pole - center pole
5 pole - three handles at center poles
- Handle moves to mid-position only upon electrical trip of the breaker. Available with circuit codes B, C, D, E, F, G, H and K.
- Handle moves to mid-position and alarm switch activates only upon electrical trip of the breaker. Available with circuit codes B & C.
- Switch Only circuits, rated up to 50 amps and 6 poles, and only available with VDE Certification when tied to a protected pole (Circuit Code B, C, D or H.). For .02 to 30 amps, select Current Code 630. For 35 - 50 amps, select Current Code 650.
- Available with Terminal Codes 1, 2 and 3. Current Rating limited to 30 amps maximum.
- Consult factory for available Dual Coil options, as special catalog number is required. With Shunt construction, Dual Coils will trip instantaneously on line voltage. Dual coils require 30VA minimum power to trip and are rated for intermittent duty only.
- Auxiliary Switch breakers with Series Trip and Switch Only circuits. On multi-pole breakers, one aux. switch is supplied, mounted in the extreme right pole.
- Separate pole type voltage coils not rated for continuous duty. Available only with delay codes 10 and 20.
- Available with Circuit Codes B & D only. VDE Certified to 30 amps. UL Recognized and CSA Accepted to 50 amps.
- VDE Certification available with single pole breakers with DC Delay only. UL Recognition and CSA Accepted available in one and two pole breakers.
- Screw Terminals are recommended on ratings greater than 20 amps. Ratings over 30 amps are only available with Terminal Codes 5, 9, G, H, M and Q.
- VDE Certification up to 25 amps and UL Recognition and CSA Acceptance up to 30 amps, but not recommended over 20 amps.
- Terminal Codes 3, 5 E and H (Bus Type) with VDE, are supplied with Lock Washers, and Terminal Code M (M6 Threaded Stud) with VDE is supplied with Lock and Flat Washers. These breakers are only VDE Certified when the washers are used.
- VDE Cert. available up to 12 amps. UL Rec. & CSA Acceptance available up to 30 amps.
- Single pole breakers with Terminal Code P (Printed Circuit Board) are available up to 30 amps with VDE Certification and 50 amps with UL Recognition and CSA Acceptance, with Circuit Codes A, B and C. Two pole breakers with Terminal Code P (Printed Circuit Board) are available up to 40 amps with UL Recognition and CSA Acceptance with Circuit Codes A, B and C.
- Available with Actuator Codes A, S and T.
- Available with voltage coils only.
- Terminal Code Q not available with VDE approvals.


| | | | | | | | | | |
|--|-------|-----|-------|-----|--------|------------------|--------|--|--|
| 7 CURRENT RATING (AMPERES) | | | | | | | | | |
| 020 | 0.020 | 230 | 0.300 | 425 | 2.500 | 612 | 12.000 | | |
| 025 | 0.025 | 235 | 0.350 | 527 | 2.750 | 712 | 12.500 | | |
| 030 | 0.030 | 240 | 0.400 | 430 | 3.000 | 613 | 13.000 | | |
| 035 | 0.035 | 245 | 0.450 | 435 | 3.500 | 614 | 14.000 | | |
| 040 | 0.040 | 250 | 0.500 | 440 | 4.000 | 615 | 15.000 | | |
| 045 | 0.045 | 255 | 0.550 | 445 | 4.500 | 616 | 16.000 | | |
| 050 | 0.050 | 260 | 0.600 | 450 | 5.000 | 617 | 17.000 | | |
| 055 | 0.055 | 265 | 0.650 | 455 | 5.500 | 618 | 18.000 | | |
| 060 | 0.060 | 270 | 0.700 | 460 | 6.000 | 620 | 20.000 | | |
| 065 | 0.065 | 275 | 0.750 | 465 | 6.500 | 622 | 22.000 | | |
| 070 | 0.070 | 280 | 0.800 | 470 | 7.000 | 624 | 24.000 | | |
| 075 | 0.075 | 285 | 0.850 | 475 | 7.500 | 625 | 25.000 | | |
| 080 | 0.080 | 290 | 0.900 | 480 | 8.000 | 630 | 30.000 | | |
| 085 | 0.085 | 295 | 0.950 | 485 | 8.500 | 635 ^a | 35.000 | | |
| 090 | 0.090 | 410 | 1.000 | 490 | 9.000 | 640 ^a | 40.000 | | |
| 095 | 0.095 | 512 | 1.250 | 495 | 9.500 | 645 ^a | 45.000 | | |
| 210 | 0.100 | 415 | 1.500 | 610 | 10.000 | 650 ^a | 50.000 | | |
| 215 | 0.150 | 517 | 1.750 | 710 | 10.500 | | | | |
| 220 | 0.200 | 420 | 2.000 | 611 | 11.000 | | | | |
| 225 | 0.250 | 522 | 2.250 | 711 | 11.500 | | | | |
| OR VOLTAGE COIL (NOMINAL RATED VOLTAGE)⁶ | | | | | | | | | |
| A06 | 6 DC | A32 | 32 DC | J12 | 12 AC | J65 | 65 AC | | |
| A12 | 12 DC | A48 | 48 DC | J18 | 18 AC | K20 | 120 AC | | |
| A18 | 18 DC | A65 | 65 DC | J24 | 24 AC | L40 | 240 AC | | |
| A24 | 24 DC | J06 | 6 AC | J48 | 48 AC | | | | |

| | | | |
|-------------------------------|--|-----------------|---------------------------------------|
| 8 TERMINAL⁹ | | E ¹¹ | Screw M4 (Bus Type) |
| 1 ¹⁰ | Push-On 0.250 Tab (Q.C.) | F | Screw M5 w/upturned lugs and 30° bend |
| 2 | Screw 8-32 w/upturned lugs | G | Screw M5 (Bus Type) and 30° bend |
| 3 ¹¹ | Screw 8-32 (Bus Type) | H | Screw M5 (Bus Type) |
| 4 | Screw 10-32 w/upturned lugs | L ¹² | 0.250 Q.C./ Solder Lug |
| 5 ¹¹ | Screw 10-32 (Bus Type) | M ¹¹ | M6 Threaded Studs |
| 6 | Screw 8-32 w/upturned lugs and 30° bend | P ¹³ | Printed Circuit Board Terminals |
| 7 | Screw 8-32 (Bus Type) and 30° bend | Q ¹⁶ | Push-In Stud |
| 8 | Screw 10-32 w/upturned lugs and 30° bend | R | Screw M4 w/upturned lugs and 30° bend |
| 9 | Screw 10-32 (Bus Type) and 30° bend | S ¹⁵ | Push-On 0.110 Tab (Q.C.) |
| B | Screw M5 w/upturned lugs | T | Screw M4 (Bus Type) and 30° bend |
| C | Screw M4 w/upturned lugs | | |

| | | | | |
|--------------------------------------|--------|------|--------------|-------|
| 9 ACTUATOR COLOR & LEGEND | | | | |
| I-O | ON-OFF | Dual | Legend Color | |
| White | A | B | 1 | Black |
| Black | C | D | 2 | White |
| Red | F | G | 3 | White |
| Green | H | J | 4 | White |
| Blue | K | L | 5 | White |
| Yellow | M | N | 6 | Black |
| Gray | P | Q | 7 | Black |
| Orange | R | S | 8 | Black |

| | | |
|--|---|-----|
| 10 MOUNTING/BARRIERS | | |
| MOUNTING STYLE | | |
| | Threaded Insert, 2 per pole | |
| 1 | 6-32 x 0.195 inches | no |
| A | 6-32 X 0.195 inches (multi-pole units only) | yes |
| 2 | ISO M3 x 5mm | no |
| B | ISO M3 x 5mm | yes |
| Rectangular Adapter Plate with mounting centers of 2.062" [52.37mm] and Threaded insert, 2 per pole | | |
| 3 ¹⁴ | 6-32 x 0.225 inches | no |
| C ¹⁴ | 6-32 X 0.225 inches (multi-pole units only) | yes |
| 4 ¹⁴ | ISO M3 x 6.5mm | no |
| D ¹⁴ | ISO M3 x 6.5mm | yes |
| Front panel Snap-In, 0.75" [19.05mm] wide bezel | | |
| 5 | without Handleguard | no |
| 6 | without Handleguard (multi-pole units only) | yes |
| Front panel Snap-In, 0.96" [24.48mm] wide bezel | | |
| 7 | without Handleguard, 1-pole units 0.96" wide; | no |
| multipole units have .105" bezel overhang on all sides | | |
| 8 | without Handleguard, 1-pole units 0.96" wide; | yes |
| (multi-pole units only) .105" bezel overhang on all sides | | |

| | |
|---------------------------|---|
| 11 AGENCY APPROVAL | |
| C | UL Recognized & CSA Accepted |
| D | VDE Certified, UL Recognized & CSA Accepted |
| E | TUV Certified, UL Recognized & CSA Accepted |
| I | UL Rec. STD 1077, UL Rec. 1500 (ignition protected), & CSA Accepted |

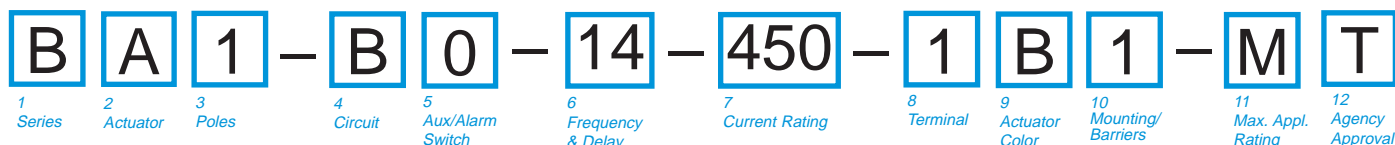

1 SERIES
B

2 ACTUATOR¹
A Handle, one per pole
B Handle, one per multipole unit
S Mid-Trip Handle, one per pole
T Mid-Trip Handle, one per pole & Alarm Switch

3 POLES
1 One **2** Two **3** Three **4** Four

4 CIRCUIT
B Series Trip (Current)

5 AUXILIARY/ALARM SWITCH²
0 w/o Aux Switch **7** S.P.S.T., 0.110 Q.C.
1 S.P.D.T., 0.093 Q.C. Term. Term.(Gold Contacts)
2 S.P.D.T., 0.110 Q.C. Term. **8** S.P.S.T., 0.187 Q.C. Term.
3 S.P.D.T., 0.139 Solder Lug **9** S.P.D.T., 0.187 Q.C. Term.

6 FREQUENCY & DELAY³
11 DC Ultra Short **52** DC, Short,Hi-Inrush
12 DC Short **54** DC, Medium, Hi-Inrush
14 DC Medium **56** DC, Long, Hi-Inrush
16 DC Long

7 CURRENT RATING (AMPERES)

| | | | | | |
|-----|-------|-----|--------|------------------|--------|
| 210 | 0.100 | 415 | 1.500 | 710 | 10.500 |
| 215 | 0.150 | 517 | 1.750 | 611 | 11.000 |
| 220 | 0.200 | 420 | 2.000 | 711 | 11.500 |
| 225 | 0.250 | 522 | 2.250 | 612 | 12.000 |
| 230 | 0.300 | 527 | 2.750 | 712 | 12.500 |
| 235 | 0.350 | 430 | 3.000 | 613 | 13.000 |
| 240 | 0.400 | 435 | 3.500 | 614 | 14.000 |
| 245 | 0.450 | 440 | 4.000 | 615 | 15.000 |
| 250 | 0.500 | 445 | 4.500 | 616 | 16.000 |
| 255 | 0.550 | 450 | 5.000 | 617 | 17.000 |
| 260 | 0.600 | 455 | 5.500 | 618 | 18.000 |
| 265 | 0.650 | 460 | 6.000 | 620 | 20.000 |
| 270 | 0.700 | 465 | 6.500 | 622 | 22.000 |
| 275 | 0.750 | 470 | 7.000 | 624 | 24.000 |
| 280 | 0.800 | 475 | 7.500 | 625 | 25.000 |
| 285 | 0.850 | 480 | 8.000 | 630 | 30.000 |
| 290 | 0.900 | 485 | 8.500 | 635 ⁵ | 35.000 |
| 295 | 0.950 | 490 | 9.000 | 640 ⁵ | 40.000 |
| 410 | 1.000 | 495 | 9.500 | 645 ⁵ | 45.000 |
| 512 | 1.250 | 610 | 10.000 | 650 ⁵ | 50.000 |

8 TERMINAL⁴

| | | | |
|----------------|--|----------------|---------------------------------------|
| 1 ⁵ | Push-On 0.250 Tab (Q.C.) | 9 | Screw 10-32 (Bus Type) and 30° bend |
| 2 | Screw 8-32 w/upturned lugs | B | Screw M5 w/upturned lugs |
| 3 ⁶ | Screw 8-32 (Bus Type) | F | Screw M5 w/upturned lugs and 30° bend |
| 4 | Screw 10-32 w/upturned lugs | G | Screw M5 (Bus Type) and 30° bend |
| 5 ⁶ | Screw 10-32 (Bus Type) | H | Screw M5 (Bus Type) |
| 6 | Screw 8-32 w/upturned lugs and 30° bend | M ⁶ | M6 Threaded Stud |
| 7 | Screw 8-32 (Bus Type) and 30° bend | P ⁷ | Printed Circuit Board Terminals |
| 8 | Screw 10-32 w/upturned lugs and 30° bend | Q ⁸ | Push-In Stud |

9 ACTUATOR COLOR

| LEGEND | | | |
|--------|--------|------|--------------|
| | ON-OFF | Dual | Legend Color |
| White | B | 1 | Black |
| Black | D | 2 | White |
| Red | G | 3 | White |
| Green | J | 4 | White |
| Blue | L | 5 | White |
| Yellow | N | 6 | Black |
| Gray | Q | 7 | Black |
| Orange | S | 8 | Black |


10 MOUNTING/BARRIERS

| | MOUNTING STYLE | BARRIERS |
|--|--|----------|
| Threaded Insert, 2 per pole | | |
| 1 | 6-32 x 0.195 inches | no |
| A | 6-32 X 0.195 inches (multi-pole units only) | yes |
| 2 | ISO M3 x 5mm | no |
| B | ISO M3 x 5mm (multi-pole units only) | yes |
| Rectangular Adapter Plate with mounting centers of 2.062 inches and Threaded insert, 2 per pole | | |
| 3 | 6-32 x 0.225 inches | no |
| C | 6-32 X 0.225 inches (multi-pole units only) | yes |
| 4 | ISO M3 x 6.5mm | no |
| D | ISO M3 x 6.5mm (multi-pole units only) | yes |
| Front panel Snap-In, 0.75" wide bezel | | |
| 5 | without Handleguard | no |
| 6 | without Handleguard (multi-pole units only) | yes |
| Front panel Snap-In, 0.96" wide bezel | | |
| 7 | without Handleguard, 1-pole units 0.96" wide; | no |
| | multipole units have .105" bezel overhang on all sides | |
| 8 | without Handleguard, 1-pole units 0.96" wide; | yes |
| | (multi-pole units only).105" bezel overhang on all sides | |

11 MAXIMUM APPLICATION RATING
M 80 DC

12 AGENCY APPROVAL
T UL489A Listed
K UL489A Listed, VDE Certified
J UL489A Listed, TUV Certified

- Notes:
- Actuator Code:
 A: Handle tie pin spacer(s) and retainers provided unassembled with multi-pole units.
 S: Handle moves to mid-position only upon electrical trip of the breaker.
 T: Handle moves to mid-position and alarm switch activates only upon electrical trip of the breaker.
 - On multi-pole breakers, one auxiliary switch is supplied, mounted in the extreme right pole.
 - VDE Certification available with single pole breakers only. UL489A Listing available with one and two pole breakers.
 - Screw Terminals are recommended on ratings greater than 20 amps. Ratings over 30 amps are only available with Terminal Codes 5, 9, G, H, M and Q.
 - Terminal Code 1 (Push-On) available up to 25 amps with TUV or VDE Certification and 30 amps with UL489A Listing, but is not recommended over 20 amps.
 - Terminal Codes 3, 5 and H (Bus Type) with TUV or VDE, are supplied with Lock Washers, and Terminal Code M (M6 Threaded Stud) with TUV or VDE is supplied with Lock and Flat Washers. These breakers are only TUV or VDE Certified when the washers are used.
 - Single pole breakers with Terminal Code P (Printed Circuit Board) are available up to 30 amps with VDE Certification and 50 amps with UL489A Listing.
 - Terminal Code Q not available with VDE approvals.

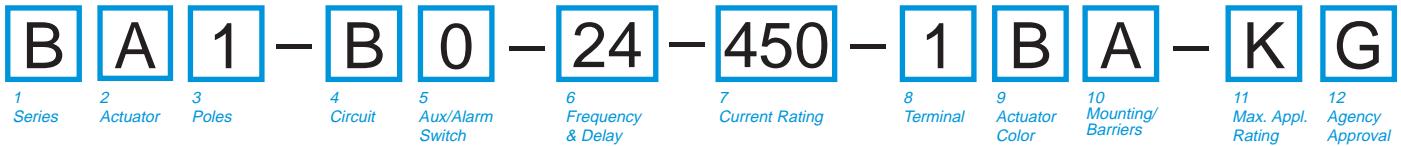

| | | | | | |
|---|--|------------|----------------------------|------------|--------|
| 1 SERIES | | | | | |
| B | | | | | |
| 2 ACTUATOR¹ | | | | | |
| A | Handle, one per pole | | | | |
| B | Handle, one per multi-pole unit | | | | |
| S | Mid-Trip Handle, one per pole | | | | |
| T | Mid-Trip Handle, one per pole & Alarm Switch | | | | |
| 3 POLES² | | | | | |
| 1 | One | 2 | Two | 3 | Three |
| 4 CIRCUIT | | | | | |
| B | Series Trip (Current) | | | | |
| 5 AUXILIARY/ALARM SWITCH⁴ | | | | | |
| 0 | w/o Aux Switch | 3 | S.P.D.T., 0.139 Solder Lug | | |
| 1 | S.P.D.T., 0.093 Q.C. Term. | 8 | S.P.S.T., 0.187 Q.C. Term. | | |
| 2 | S.P.D.T., 0.110 Q.C. Term. | 9 | S.P.D.T., 0.187 Q.C. Term. | | |
| 6 FREQUENCY & DELAY | | | | | |
| 21 | AC Ultra Short | 42 | AC, Short, Hi-Inrush | | |
| 22 | AC Short | 44 | AC, Medium, Hi-Inrush | | |
| 24 | AC Medium | 46 | AC, Long, Hi-Inrush | | |
| 26 | AC Long | | | | |
| 7 CURRENT RATING (AMPERES) | | | | | |
| 210 | 0.100 | 512 | 1.250 | 495 | 9.500 |
| 215 | 0.150 | 415 | 1.500 | 610 | 10.000 |
| 220 | 0.200 | 517 | 1.750 | 710 | 10.500 |
| 225 | 0.250 | 420 | 2.000 | 611 | 11.000 |
| 230 | 0.300 | 522 | 2.250 | 711 | 11.500 |
| 235 | 0.350 | 527 | 2.750 | 612 | 12.000 |
| 240 | 0.400 | 430 | 3.000 | 712 | 12.500 |
| 245 | 0.450 | 435 | 3.500 | 613 | 13.000 |
| 250 | 0.500 | 440 | 4.000 | 614 | 14.000 |
| 255 | 0.550 | 445 | 4.500 | 615 | 15.000 |
| 260 | 0.600 | 450 | 5.000 | 616 | 16.000 |
| 265 | 0.650 | 455 | 5.500 | 617 | 17.000 |
| 270 | 0.700 | 460 | 6.000 | 618 | 18.000 |
| 275 | 0.750 | 465 | 6.500 | 620 | 20.000 |
| 280 | 0.800 | 470 | 7.000 | 622 | 22.000 |
| 285 | 0.850 | 475 | 7.500 | 624 | 24.000 |
| 290 | 0.900 | 480 | 8.000 | 625 | 25.000 |
| 295 | 0.950 | 485 | 8.500 | 630 | 30.000 |
| 410 | 1.000 | 490 | 9.000 | | |

| | | | |
|-------------------------------|--|----------|---|
| 8 TERMINAL⁵ | | 9 | Screw 10-32 (Bus Type) and 30° bend |
| 1 | Push-On 0.250 Tab (Q.C.) | A | Load Terminal: #8 Screw/QC Combination. (Special Cat.#) |
| 2 | Screw 8-32 w/upturned lugs | B | Screw M5 w/upturned lugs |
| 3 | Screw 8-32 (Bus Type) | F | Screw M5 w/upturned lugs and 30° bend |
| 4 | Screw 10-32 w/upturned lugs | G | Screw M5 (Bus Type) and 30° bend |
| 5 | Screw 10-32 (Bus Type) | H | Screw M5 (Bus Type) |
| 6 | Screw 8-32 w/upturned lugs and 30° bend | M | M6 Threaded Stud |
| 7 | Screw 8-32 (Bus Type) and 30° bend | Q | Push-In Stud |
| 8 | Screw 10-32 w/upturned lugs and 30° bend | | |


| | | | |
|-------------------------------------|----------|----------|--------------|
| 9 ACTUATOR COLOR⁶ | | | |
| | LEGEND | | |
| | ON-OFF | Dual | Legend Color |
| White | B | 1 | Black |
| Black | D | 2 | White |
| Red | G | 3 | White |
| Green | J | 4 | White |
| Blue | L | 5 | White |
| Yellow | N | 6 | Black |
| Gray | Q | 7 | Black |
| Orange | S | 8 | Black |

| | | |
|-----------------------------|--|-----------------------|
| 10 MOUNTING/BARRIERS | | |
| | MOUNTING STYLE | BARRIERS ⁹ |
| | <i>Threaded Insert, 2 per pole</i> | |
| A | 6-32 X 0.195 inches | yes |
| B | ISO M3 x 5mm | yes |
| | <i>Rectangular Adapter Plate with mounting centers of 2.062 inches and Threaded insert, 2 per pole</i> | |
| C | 6-32 X 0.225 inches | yes |
| D | ISO M3 x 6.5mm | yes |
| | <i>Front panel Snap-In, 0.75" wide bezel</i> | |
| 6 | without Handleguard | yes |
| | <i>Front panel Snap-In, 0.96" wide bezel</i> | |
| 8 | without Handleguard, 1-pole units 0.96" wide; .105" bezel overhang on all sides | yes |

| | |
|--------------------------------------|------------|
| 11 MAXIMUM APPLICATION RATING | |
| C⁸ | 120/240VAC |
| K | 120VAC |

| | |
|---------------------------|-----------------------------|
| 12 AGENCY APPROVAL | |
| G | UL489 Listed |
| 3 | UL489 Listed, TUV Certified |

- Notes:
- Actuator Code:
 A: Handle tie pin spacer(s) and retainers provided unassembled with multi-pole units.
 B: Handle location as viewed from front of breaker:
 2 pole - left pole 3 pole - center pole
 S: Handle moves to mid-position only upon electrical trip of the breaker. Available with circuit codes B, C, D, E, F, G, H and K.
 T: Handle moves to mid-position and alarm switch activates only upon electrical trip of the breaker. Available with circuit codes B & C.
 - All poles must be same polarity.
 - 3 pole units available only when 1 of 3 poles is neutral.
 - Auxiliary/Alarm Switch circuit must be same polarity as the main circuit. On multi-pole breakers, one aux. switch is supplied, mounted in the extreme right pole.
 - Screw Terminals are recommended on ratings greater than 20 amps.
 - Standard actuator colors are black and white.
 - Adapter plate with mounting centers of 2.082 inches. Available with Actuator Codes A, S and T.
 - Voltage Rating available with 2 and 3-pole breakers only.
 - Barriers supplied on multi-pole units only.

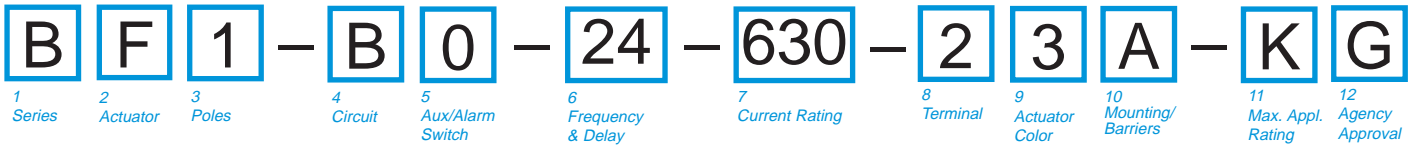

1 SERIES
B

2 ACTUATOR
Two Color Visi-Rocker

C Indicate ON, vertical legend
D Indicate ON, horizontal legend
F Indicate OFF, vertical legend
G Indicate OFF, horizontal legend

Single color
J Vertical legend
K Horizontal legend

Push-To-Reset, Visi-Rocker
N Indicate OFF, vertical legend
O Indicate OFF, horizontal legend

Push-To-Reset, Single color
R Vertical legend
U Horizontal legend

| | INDICATE "ON" | INDICATE "OFF" | SINGLE COLOR |
|------------------|---------------|----------------|--------------|
| VERTICAL STYLE | CODE "C" | CODE "F" | CODE "J" |
| | CODE "D" | CODE "G" | CODE "K" |
| HORIZONTAL STYLE | CODE "C" | CODE "F" | CODE "J" |
| | CODE "D" | CODE "G" | CODE "K" |

3 POLES^{1,2}
1 One 2 Two 3³ Three

4 CIRCUIT
B Series Trip (Current)

5 AUXILIARY/ALARM SWITCH⁴

| | |
|------------------------------|------------------------------|
| 0 w/o Aux Switch | 7 S.P.S.T., 0.110 Q.C. |
| 1 S.P.D.T., 0.093 Q.C. Term. | 8 S.P.S.T., 0.187 Q.C. Term. |
| 2 S.P.D.T., 0.110 Q.C. Term. | 9 S.P.D.T., 0.187 Q.C. Term. |
| 3 S.P.D.T., 0.139 Solder Lug | |

6 FREQUENCY & DELAY

| | |
|-------------------|--------------------------|
| 21 AC Ultra Short | 42 AC, Short, Hi-Inrush |
| 22 AC Short | 44 AC, Medium, Hi-Inrush |
| 24 AC Medium | 46 AC, Long, Hi-Inrush |
| 26 AC Long | |

7 CURRENT RATING (AMPERES)

| | | | | | | | |
|-----|-------|-----|-------|-----|--------|-----|--------|
| 210 | 0.100 | 280 | 0.800 | 445 | 4.500 | 711 | 11.500 |
| 215 | 0.150 | 285 | 0.850 | 450 | 5.000 | 612 | 12.000 |
| 220 | 0.200 | 290 | 0.900 | 455 | 5.500 | 712 | 12.500 |
| 225 | 0.250 | 295 | 0.950 | 460 | 6.000 | 613 | 13.000 |
| 230 | 0.300 | 410 | 1.000 | 465 | 6.500 | 614 | 14.000 |
| 235 | 0.350 | 512 | 1.250 | 470 | 7.000 | 615 | 15.000 |
| 240 | 0.400 | 415 | 1.500 | 475 | 7.500 | 616 | 16.000 |
| 245 | 0.450 | 517 | 1.750 | 480 | 8.000 | 617 | 17.000 |
| 250 | 0.500 | 420 | 2.000 | 485 | 8.500 | 618 | 18.000 |
| 255 | 0.550 | 522 | 2.250 | 490 | 9.000 | 620 | 20.000 |
| 260 | 0.600 | 527 | 2.750 | 495 | 9.500 | 622 | 22.000 |
| 265 | 0.650 | 430 | 3.000 | 610 | 10.000 | 624 | 24.000 |
| 270 | 0.700 | 435 | 3.500 | 710 | 10.500 | 625 | 25.000 |
| 275 | 0.750 | 440 | 4.000 | 611 | 11.000 | 630 | 30.000 |

8 TERMINAL⁵

| | |
|--|---|
| 1 ⁶ Push-On 0.250 Tab (Q.C.) | 9 Screw 10-32 (Bus Type) and 30° bend |
| 2 Screw 8-32 w/upturned lugs | B Screw M5 w/upturned lugs |
| 3 Screw 8-32 (Bus Type) | C Screw M4 w/upturned lugs |
| 4 Screw 10-32 w/upturned lugs | F Screw M5 w/upturned lugs and 30° bend |
| 5 Screw 10-32 (Bus Type) | G Screw M5 (Bus Type) and 30° bend |
| 6 Screw 8-32 w/upturned lugs and 30° bend | H Screw M5 (Bus Type) |
| 7 Screw 8-32 (Bus Type) and 30° bend | |
| 8 Screw 10-32 w/upturned lugs and 30° bend | |

9 ACTUATOR COLOR & LEGEND

| Actuator or Visi-Color ⁷ | Marking | | Marking Color: | |
|-------------------------------------|---------|-------------------|----------------|-------------|
| | ON-OFF | Dual ⁷ | Single Color | Visi-Rocker |
| White | B | 1 | Black | White |
| Black | D | 2 | White | n/a |
| Red | G | 3 | White | Red |
| Green | J | 4 | White | Green |
| Blue | L | 5 | White | Blue |
| Yellow | N | 6 | Black | Yellow |
| Gray | Q | 7 | Black | Gray |
| Orange | S | 8 | Black | Orange |

10 MOUNTING/BARRIERS

| | |
|------------------------------------|-----------------------|
| STANDARD ROCKER BEZEL | BARRIERS ⁹ |
| <i>Threaded Insert, 2 per pole</i> | |
| A 6-32 X 0.195 inches | yes |
| B ISO M3 x 5mm | yes |
| ROCKERGUARD BEZEL | |
| <i>Threaded Insert, 2 per pole</i> | |
| C 6-32 x 0.195 inches | yes |
| D ISO M3 x 5mm | yes |

11 MAXIMUM APPLICATION RATING

| |
|----------------------------|
| C ⁸ 120/240 VAC |
| K 120 VAC |

11 AGENCY APPROVAL

| |
|----------------|
| G UL489 Listed |
|----------------|

Notes:
 1 Multi-pole breakers have all breakers identical except when specifying Aux. switch and/or mixed poles, and have one rocker per breaker.
 2 All poles must be same polarity.
 3 3 pole units available only when 1 of 3 poles is neutral.
 4 On multi-pole breakers, one aux. switch is supplied, mounted in the extreme right pole.
 5 Screw Terminals are recommended on ratings greater than 20 amps.
 6 Terminal Code 1 (Push-On) available up to 30 amps, but are not recommended over 20 amps.
 7 Dual legend = ON-OFF/I-O
 8 Voltage Rating available with 2 and 3-pole breakers only.
 9 Barriers supplied on multi-pole units only.

B **1** **1** – **B** **0** – **24** – **630** – **2** **3** **A** – **K** **G**

1 Series 2 Actuator 3 Poles 4 Circuit 5 Aux/Alarm Switch 6 Frequency & Delay 7 Current Rating 8 Terminal 9 Actuator Color 10 Mounting/Barriers 11 Max. Appl. Rating 12 Agency Approval

1 SERIES
B

2 ACTUATOR ¹
Two Color Visi-Rocker
1 Indicate OFF, vertical legend
2 Indicate OFF, horizontal legend
Single color
3 Vertical legend
4 Horizontal legend
Push-To-Reset, Visi-Rocker
5 Indicate OFF, vertical legend
6 Indicate OFF, horizontal legend
Push-To-Reset, Single color
7 Vertical legend
8 Horizontal legend

| ROCKER STYLE DESCRIPTIONS | |
|---------------------------|-------------------|
| INDICATE "OFF" | |
| VERTICAL STYLE | SINGLE COLOR |
| CODE "1", "5" | CODE "3", "7" |
| CODE "2", "6" | CODE "4", "8" |
| HORIZONTAL STYLE | |
| | |

3 POLES^{2,3}
1 One 2 Two 3⁴ Three

4 CIRCUIT
B Series Trip (Current)

5 AUXILIARY/ALARM SWITCH⁵

| | |
|------------------------------|---|
| 0 w/o Aux Switch | 7 S.P.S.T., 0.110 Q.C. Term.(Gold Contacts) |
| 1 S.P.D.T., 0.093 Q.C. Term. | 8 S.P.S.T., 0.187 Q.C. Term. |
| 2 S.P.D.T., 0.110 Q.C. Term. | 9 S.P.D.T., 0.187 Q.C. Term. |
| 3 S.P.D.T., 0.139 Solder Lug | |

6 FREQUENCY & DELAY

| | |
|-------------------|--------------------------|
| 21 AC Ultra Short | 42 AC, Short, Hi-Inrush |
| 22 AC Short | 44 AC, Medium, Hi-Inrush |
| 24 AC Medium | 46 AC, Long, Hi-Inrush |
| 26 AC Long | |

7 CURRENT RATING (AMPERES)

| | | | |
|-----------|-----------|------------|------------|
| 210 0.100 | 280 0.800 | 445 4.500 | 711 11.500 |
| 215 0.150 | 285 0.850 | 450 5.000 | 612 12.000 |
| 220 0.200 | 290 0.900 | 455 5.500 | 712 12.500 |
| 225 0.250 | 295 0.950 | 460 6.000 | 613 13.000 |
| 230 0.300 | 410 1.000 | 465 6.500 | 614 14.000 |
| 235 0.350 | 512 1.250 | 470 7.000 | 615 15.000 |
| 240 0.400 | 415 1.500 | 475 7.500 | 616 16.000 |
| 245 0.450 | 517 1.750 | 480 8.000 | 617 17.000 |
| 250 0.500 | 420 2.000 | 485 8.500 | 618 18.000 |
| 255 0.550 | 522 2.250 | 490 9.000 | 620 20.000 |
| 260 0.600 | 527 2.750 | 495 9.500 | 622 22.000 |
| 265 0.650 | 430 3.000 | 610 10.000 | 624 24.000 |
| 270 0.700 | 435 3.500 | 710 10.500 | 625 25.000 |
| 275 0.750 | 440 4.000 | 611 11.000 | 630 30.000 |

8 TERMINAL⁶

| | |
|--|---|
| 1 ⁷ Push-On 0.250 Tab (Q.C.) | 9 Screw 10-32 (Bus Type) and 30° bend |
| 2 Screw 8-32 w/upturned lugs | B Screw M5 w/upturned lugs |
| 3 Screw 8-32 (Bus Type) | C Screw M4 w/upturned lugs |
| 4 Screw 10-32 w/upturned lugs | F Screw M5 w/upturned lugs and 30° bend |
| 5 Screw 10-32 (Bus Type) | G Screw M5 (Bus Type) and 30° bend |
| 6 Screw 8-32 w/upturned lugs and 30° bend | H Screw M5 (Bus Type) |
| 7 Screw 8-32 (Bus Type) and 30° bend | |
| 8 Screw 10-32 w/upturned lugs and 30° bend | |

9 ACTUATOR COLOR & LEGEND
Actuator or Visi-Color⁸

| | Marking | | Marking Color: | |
|--------|---------|-------------------|----------------|-------------|
| | ON-OFF | Dual ⁹ | Single Color | Visi-Rocker |
| White | B | 1 | Black | White |
| Black | D | 2 | White | n/a |
| Red | G | 3 | White | Red |
| Green | J | 4 | White | Green |
| Blue | L | 5 | White | Blue |
| Yellow | N | 6 | Black | Yellow |
| Gray | Q | 7 | Black | Gray |
| Orange | S | 8 | Black | Orange |

10 MOUNTING/BARRIERS⁹ BARRIERS¹²

STANDARD ROCKER BEZEL, Threaded Insert, 2 per pole
FLAT ROCKER ACTUATOR

| | |
|-----------------------|-----|
| A 6-32 X 0.195 inches | yes |
| B ISO M3 x 5mm | yes |

RECESSED OFF SIDE ROCKER ACTUATOR¹⁰

| | |
|-----------------------|-----|
| E 6-32 x 0.195 inches | yes |
| F ISO M3 x 5mm | yes |

PUSH-TO-RESET BEZEL, Threaded Insert, 2 per pole

| | |
|-----------------------|-----|
| C 6-32 x 0.195 inches | yes |
| D ISO M3 x 5mm | yes |

11 MAXIMUM APPLICATION RATING

| |
|-----------------------------|
| C ¹¹ 120/240 VAC |
| K 120 VAC |




12 AGENCY APPROVAL
G UL489 Listed

- Notes:
- 1 Push-To-Reset actuators have OFF portion of rocker shrouded.
 - 2 Multi-pole breakers have all breakers identical except when specifying Aux. switch and/or mixed poles, and have one rocker per breaker.
 - 3 All poles must be same polarity.
 - 4 3 pole units available only when 1 of 3 poles is neutral.
 - 5 On multi-pole breakers, one aux. switch is supplied, mounted in the extreme right pole.
 - 6 Screw Terminals are recommended on ratings greater than 20 amps.
 - 7 Terminal Code 1 (Push-On) available up to 30 amps, but are not recommended over 20 amps.
 - 8 Color shown is visi and legend with remainder of rocker black, Dual = ON-OFF/I-O legend.
 - 9 Legend on Push-to-reset bezel/shroud is white with single color actuator codes 7 & 8. Legend on Push-To-Reset bezel/shroud matches Visi-Color of rocker with actuator codes 5 & 6.
 - 10 Recessed "off-side" available with actuator codes 1, 2, 3 & 4. Legends on rocker are available in ink stamping only.
 - 11 Voltage rating available with 2 & 3-pole breakers only.
 - 12 Barriers supplied on multi-pole units only.

| | CIRCUIT SCHEMATIC | | CIRCUIT CODE | AUX. SWITCH CODE | CIRCUIT SCHEMATIC | | CIRCUIT CODE | AUX. SWITCH CODE |
|---|--|-----|--------------|------------------|---|-----|--------------|------------------|
| | ANSI | IEC | | | ANSI | IEC | | |
| | SWITCH ONLY (NO COIL) | | | | SERIES TRIP | | | |
| <p>SERIES TRIP (2 TERM'S.)</p> | | | A | O | | | B C | O |
| <p>SERIES TRIP W AUX SWITCH (5 TERM'S.)</p> | <p>SWITCH ONLY (NO COIL) WITH AUXILIARY SWITCH</p> | | A | 2 3 4 | <p>SERIES TRIP WITH AUXILIARY / ALARM SWITCH</p> | | B C | 2 3 4 |
| <p>SHUNT TRIP (3 TERM'S.)</p> | <p>SHUNT TRIP</p> | | D E | 0 | <p>DUAL COIL: SERIES TRIP CURRENT COIL, SHUNT TRIP VOLTAGE COIL</p> | | H | 0 |
| <p>RELAY TRIP (4 TERM'S.)</p> | <p>RELAY TRIP</p> | | F G | 0 | <p>DUAL COIL: SERIES TRIP CURRENT COIL, RELAY TRIP VOLTAGE COIL</p> | | K | 0 |


- Notes:
- All dimensions are in inches [millimeters].
 - Tolerance $\pm .020$ [.51] unless otherwise specified.
 - Alarm Switch available with .110 x .020 Q.C. & Solder Lug Terminals Only.

| HANDLE POSITION VS. AUX/ALARM SWITCH MODE | | | | | | |
|---|-----------------|------------------|-----------------|-------------------|-----------------|-------------------------------------|
| CIRCUIT BREAKER MODE | STANDARD C/R | | MID TRIP C/R | | MID TRIP C/R | |
| | HANDLE POSITION | AUX. SWITCH MODE | HANDLE POSITION | ALARM SWITCH MODE | HANDLE POSITION | AUX. SWITCH MODE (w/o ALARM SWITCH) |
| OFF | | | | | | |
| ON | | | | | | |
| ELECTRICAL TRIP | | | | | | |

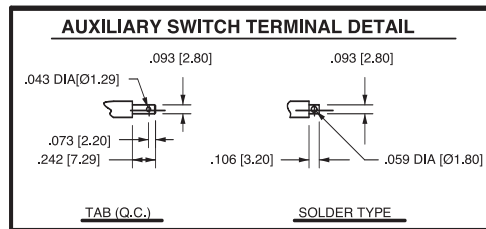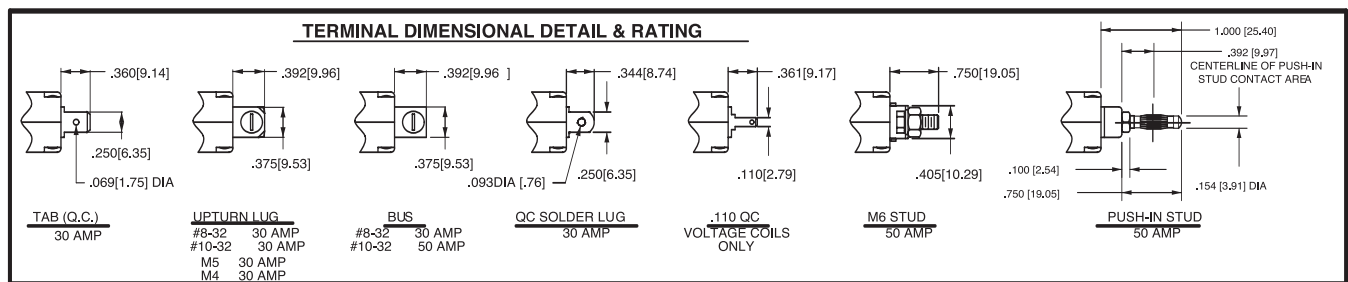

**TABLE A
TIGHTENING TORQUE SPECIFICATIONS**

| THREAD SIZE | TORQUE |
|-----------------------------------|---------------------------|
| #6-32 & M3 MOUNTING HARDWARE | 7-9 IN-LBS [0.8-1.0 NM] |
| #8-32 & M4 THREAD TERMINAL SCREW | 12-15 IN-LBS [1.4-1.7 NM] |
| #10-32 & M5 THREAD TERMINAL SCREW | 15-20 IN-LBS [1.7-2.3 NM] |

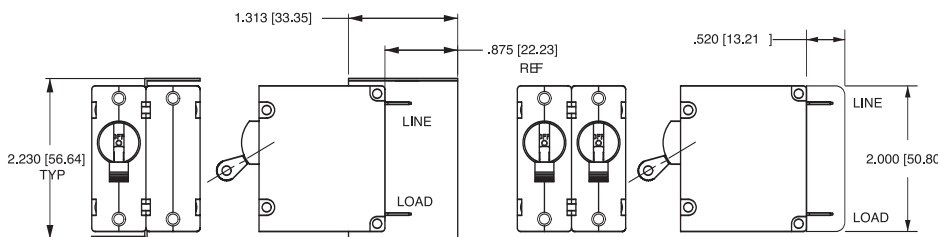



BARRIER FOR UL-489 MULTI-POLE BREAKERS

BARRIER FOR UL-RECOGNIZED MULTI-POLE BREAKERS

TABLE B




| TERMINAL DESCRIPTION | DEPTH BEHIND PANEL |
|--|--------------------|
| MAIN TAB (Q.C.) | 2.090 [53.09] |
| MAIN SCREW TYPE | 2.122 [53.90] |
| SHUNT, RELAY & DUAL COIL TAB (Q.C.) | 2.612 [66.35] |
| SHUNT, RELAY & DUAL COIL SCREW #8-32 W/UPTURNED LUGS | 2.644 [67.16] |
| AUX. SWITCH* TAB (Q.C.) .110 x .020 | 2.537 [64.44] |
| AUX. SWITCH* SOLDER TYPE | 2.348 [59.64] |

* AVAILABLE ON SERIES TRIP AND SWITCH ONLY CIRCUITS WHEN CALLED FOR ON MULTI-POLE UNITS. ONLY ONE AUX. SWITCH IS NORMALLY SUPPLIED, AS SHOWN IN MULTI-POLE IDENTIFICATION SCHEME







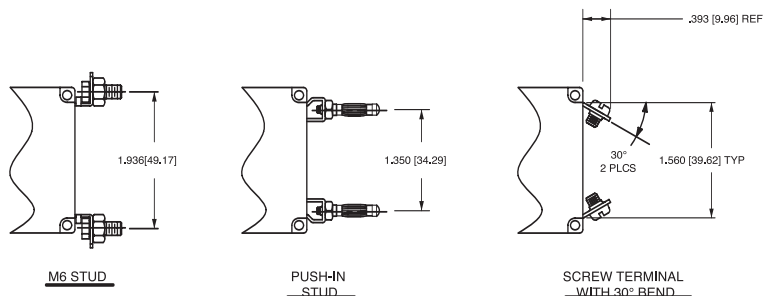
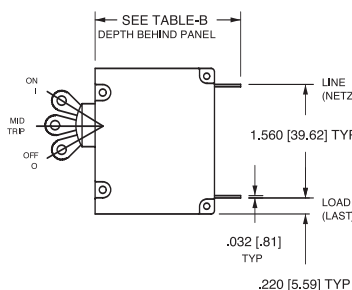


- Notes:
- All dimensions are in inches [millimeters].
 - Tolerance ± 0.020 [.51] unless otherwise specified.

B-Series Handle – Front Panel Snap-In Mounting Style 5

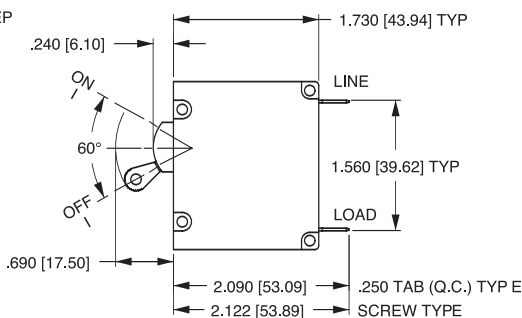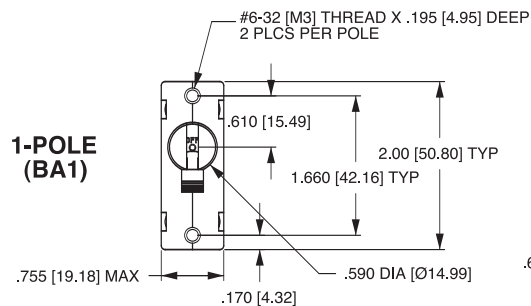


TAB (Q.C.) TYPE TERMINALS IN SERIES TRIP CIRCUIT CONFIGURATION SHOWN. FOR OTHER CONFIGURATIONS, SEE CIRCUIT AND TERMINAL DRAWINGS.

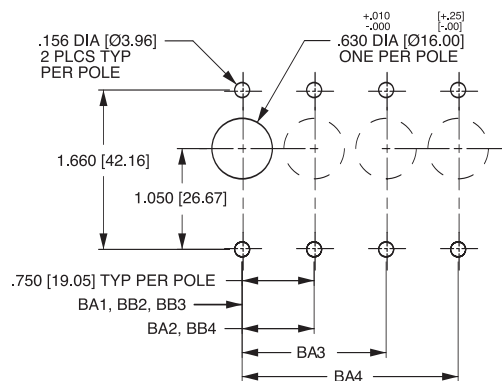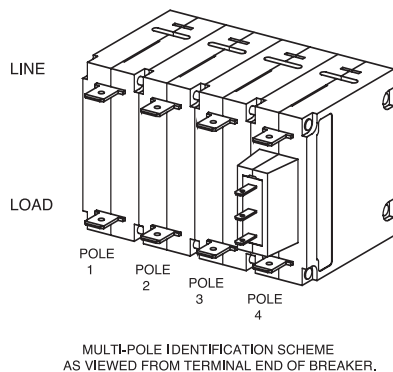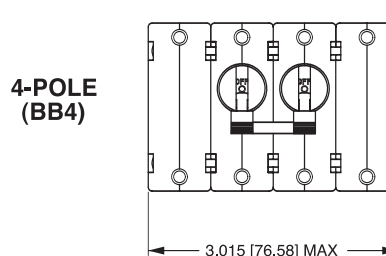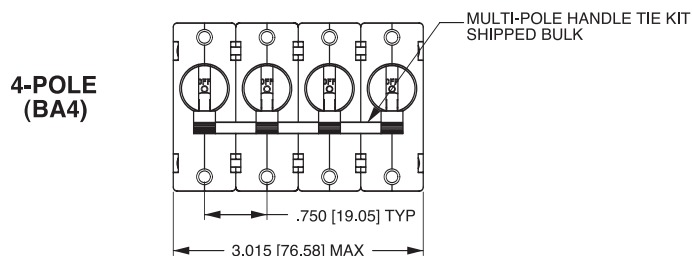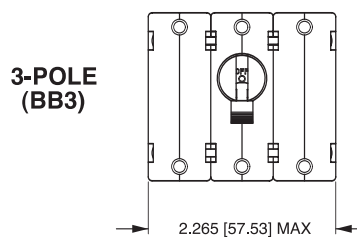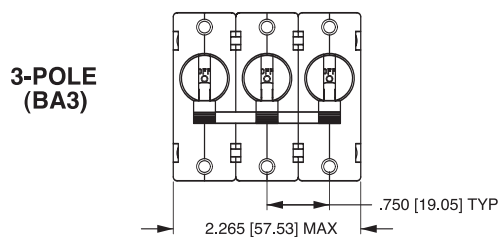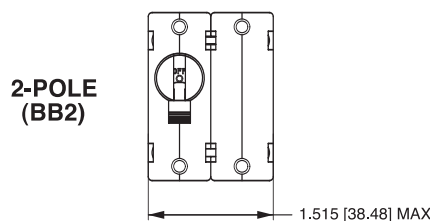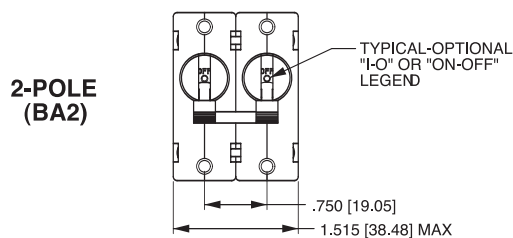


PANEL CUTOUT DETAIL
TOLERANCES ±.005 [±.12]

- Notes:
- All dimensions are in inches [millimeters].
 - Tolerance ±.020 [.51] unless otherwise specified.

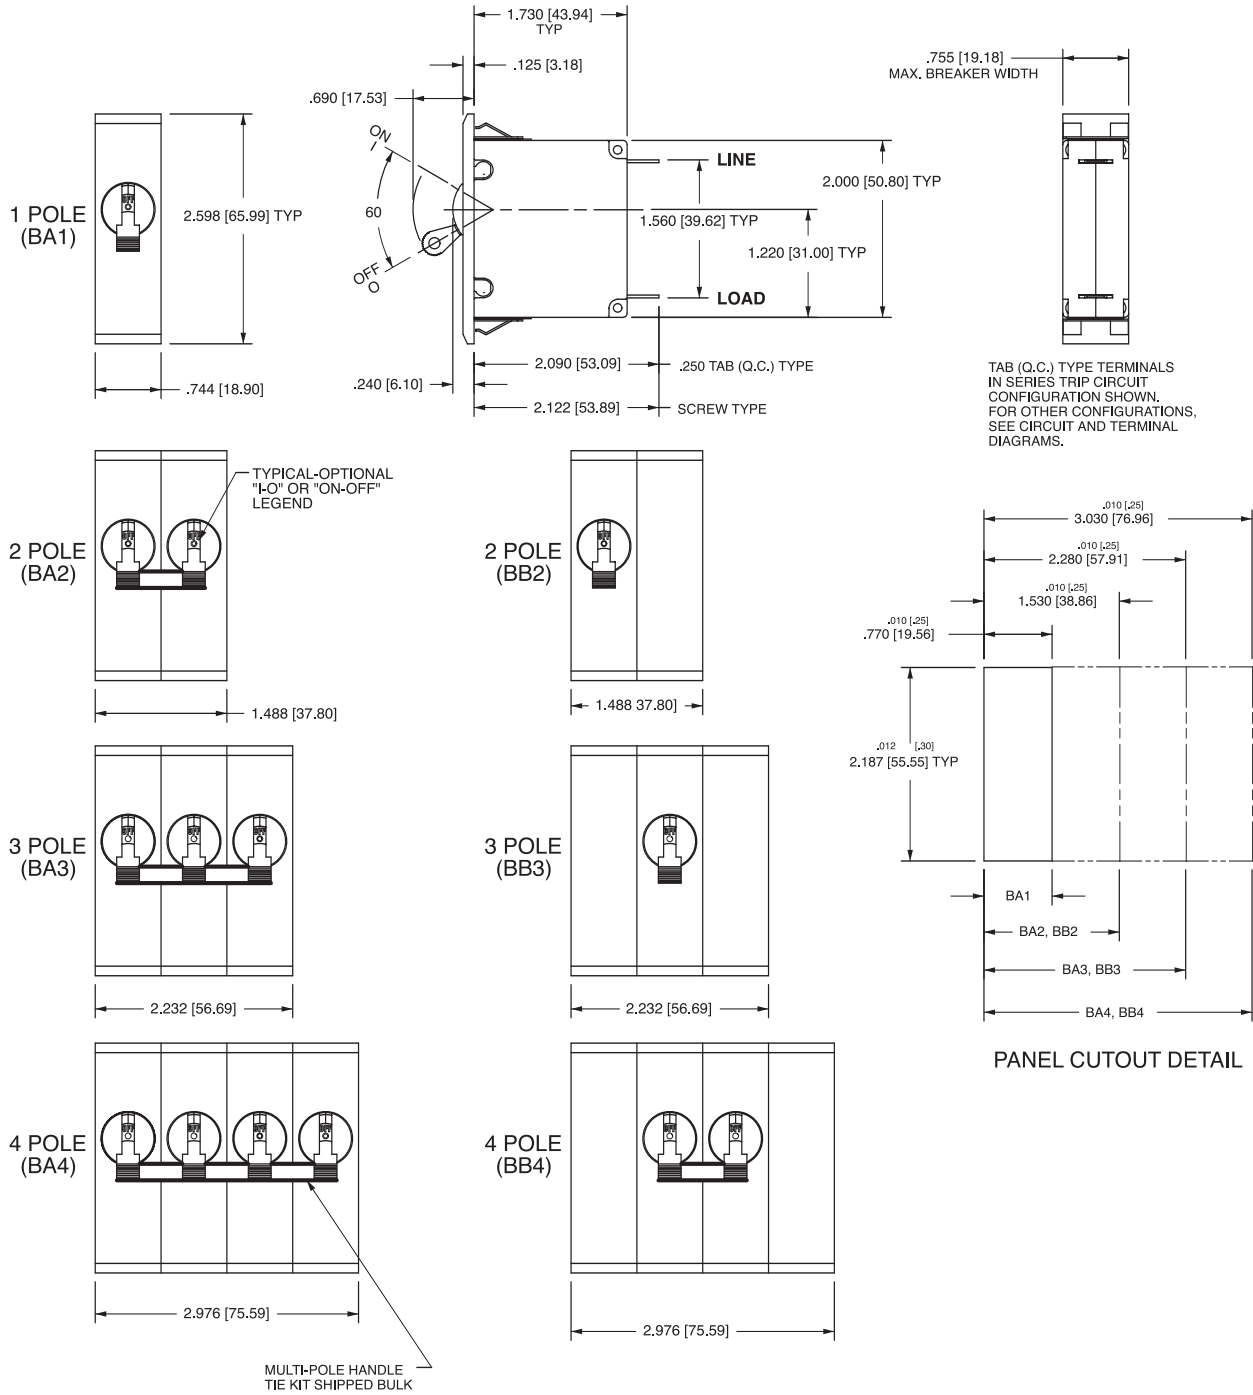


- Notes:
- 1 All dimensions are in inches [millimeters].
 - 2 Recommended panel thickness: .040 [1.02] to .100 [2.54].
 - 3 Tolerance $\pm .020$ [.51] unless otherwise specified.


B-Series Handle – Front Panel Snap-In Mounting Style 7

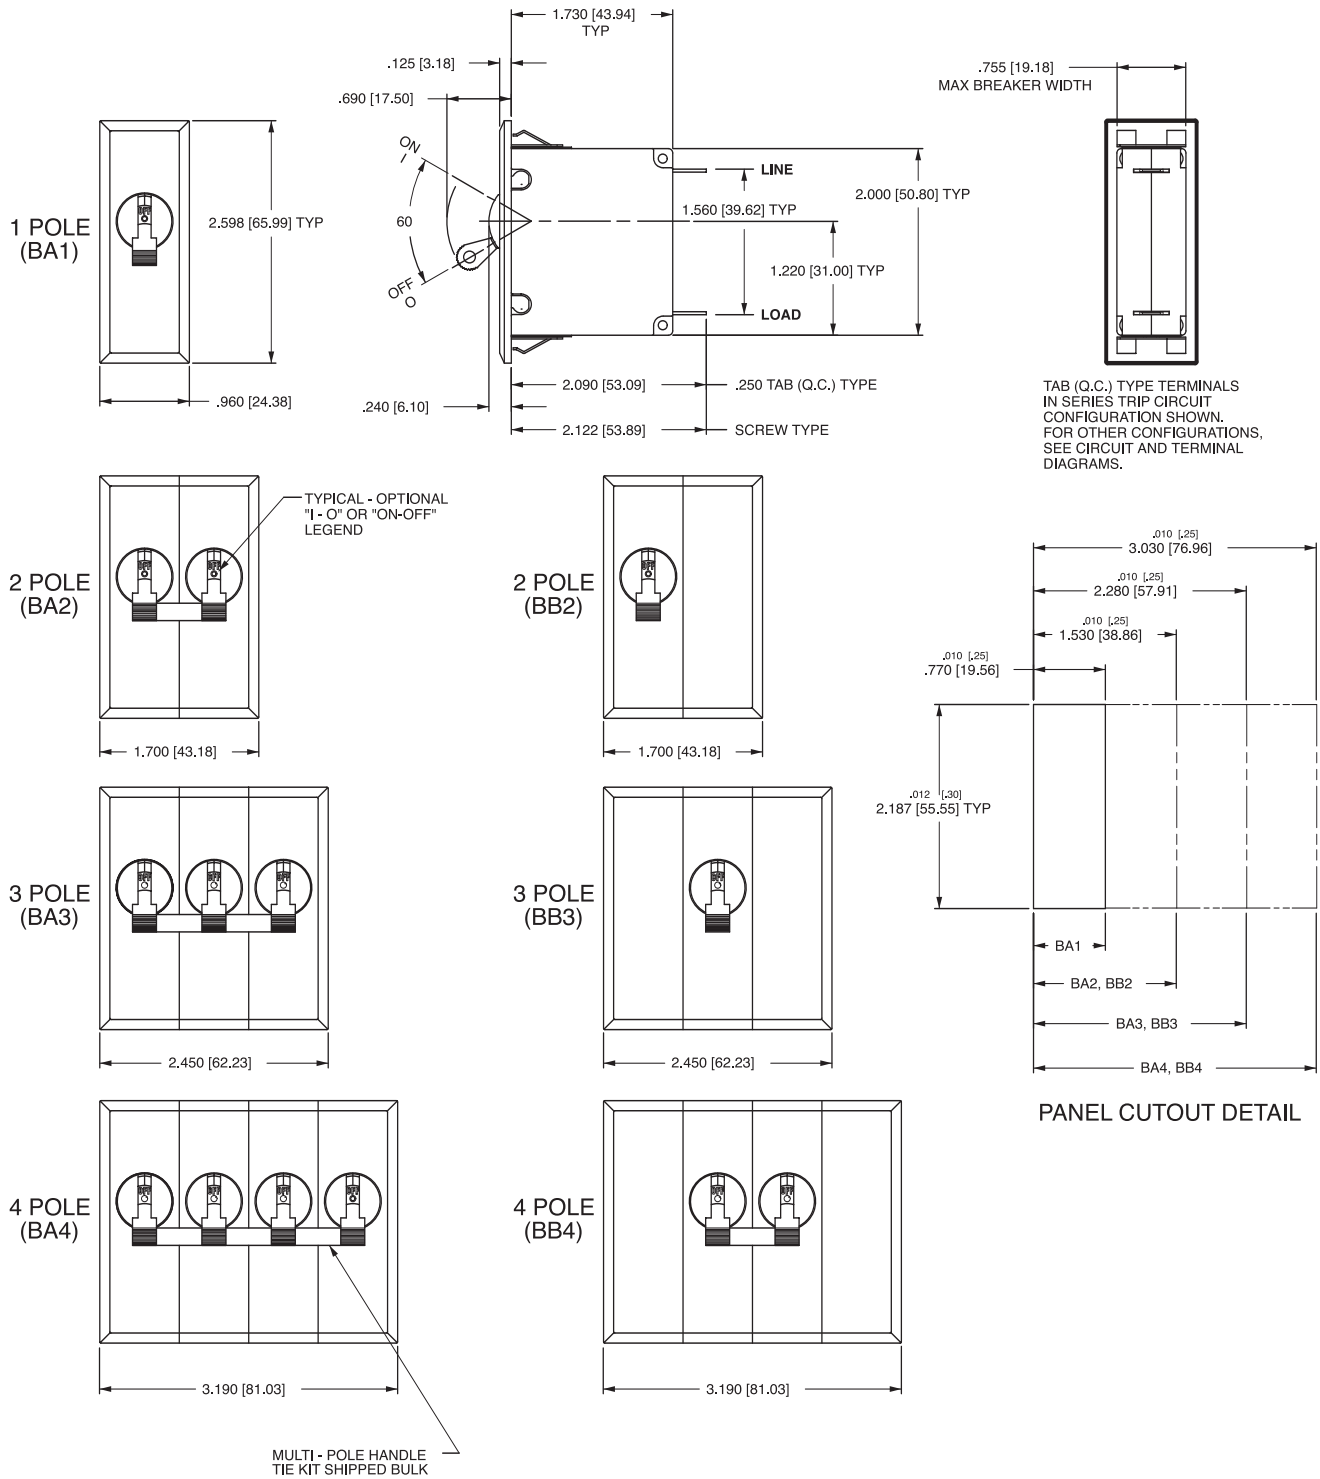

- Notes:
- 1 All dimensions are in inches [millimeters].
 - 2 Recommended panel thickness .040 [1.02] to .100 [2.54].
 - 3 Tolerance ±.020 [.51] unless otherwise specified.







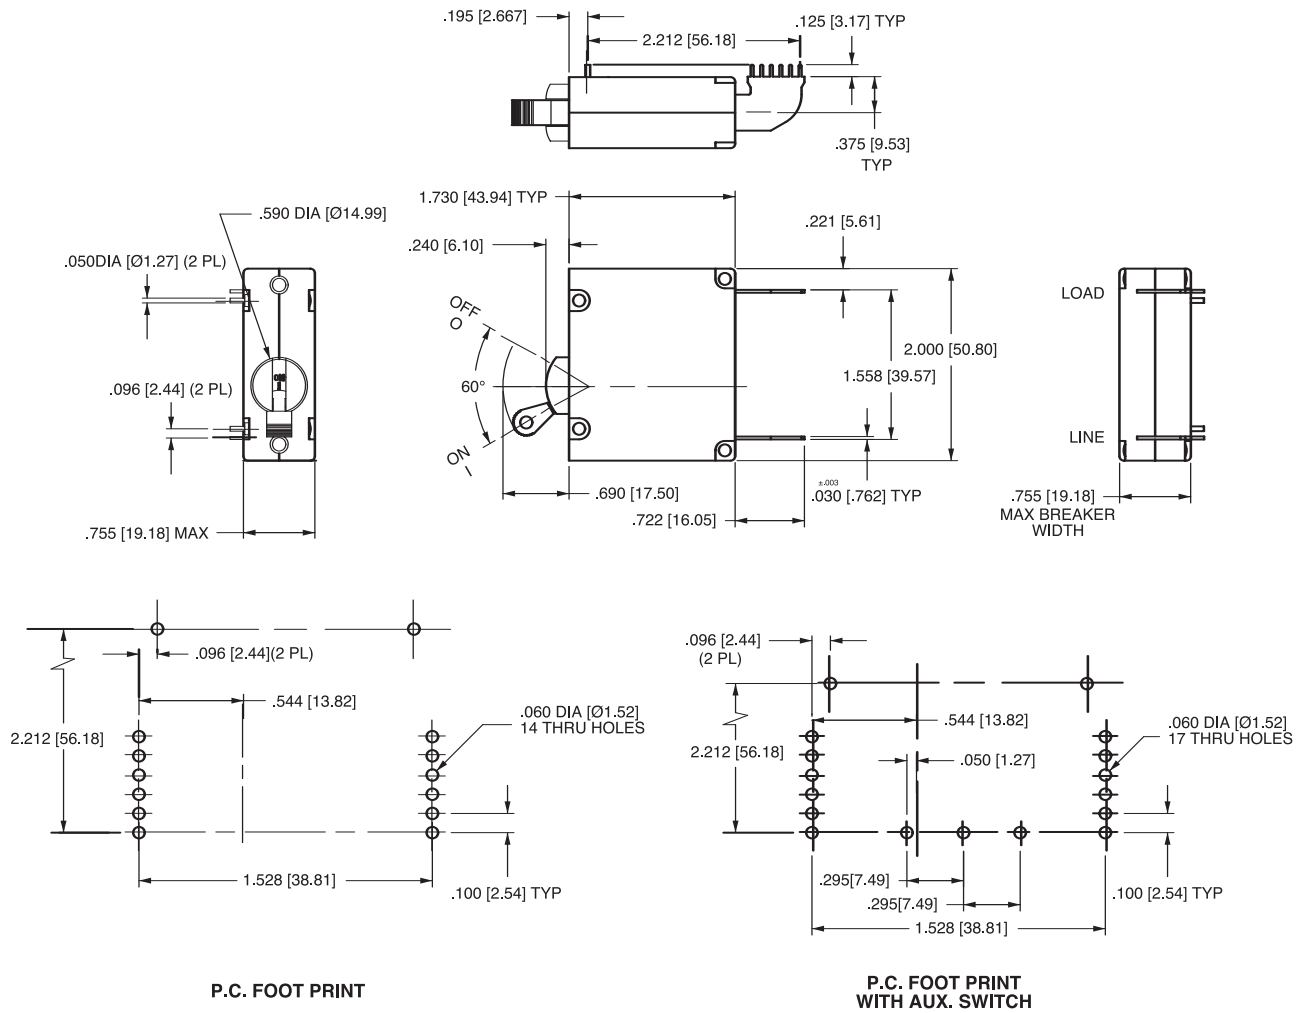


- Notes:
- 1 All dimensions are in inches [millimeters].
 - 2 For pole orientation with horizontal legend, rotate front view clockwise 90°.
 - 3 Tolerance ±.010 [.25] unless otherwise specified.

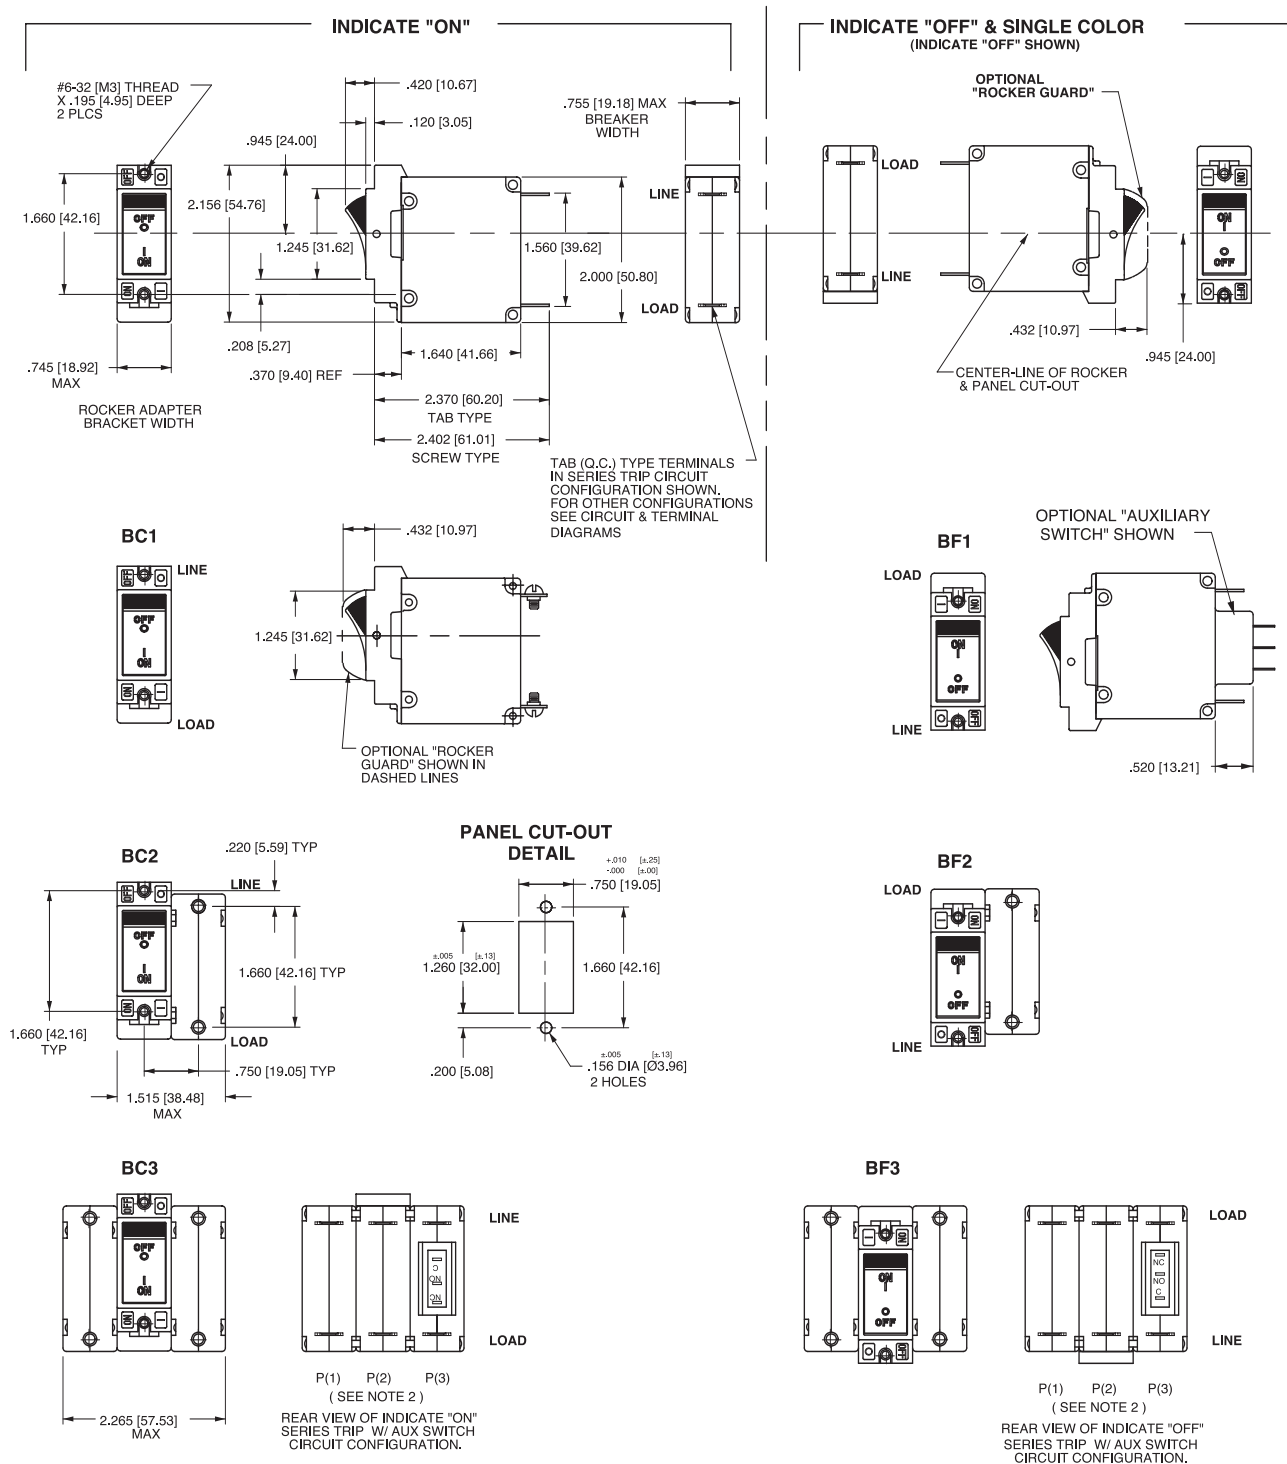


- Notes:
- 1 Dimensions apply to all variations shown. Notice that circuit breaker line & load terminal orientation on indicate "OFF" is opposite of indicate "ON".
 - 2 For pole orientation with horizontal legend, rotate front view clockwise 90°.
 - 3 All dimensions are in inches [millimeters].
 - 4 Tolerance ±.020 [51] unless otherwise specified.

INDICATE "OFF" & SINGLE COLOR
(INDICATE "OFF" SHOWN)

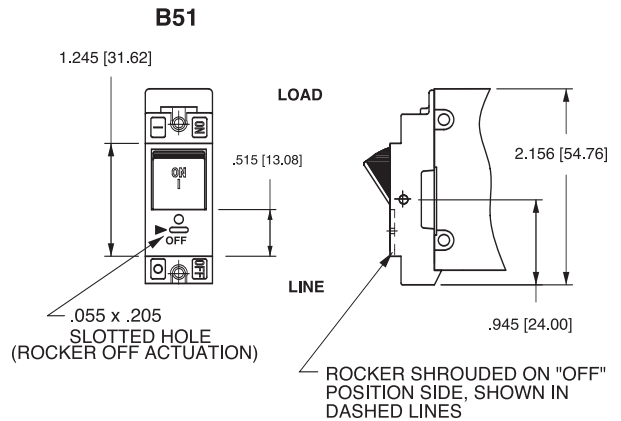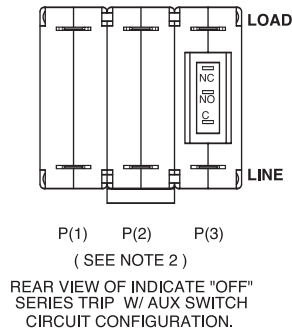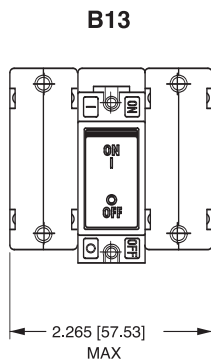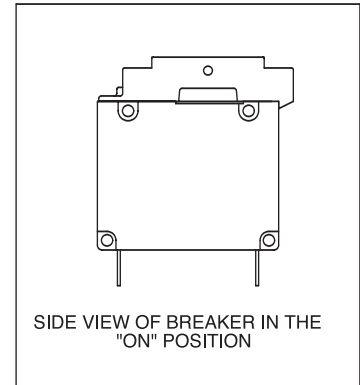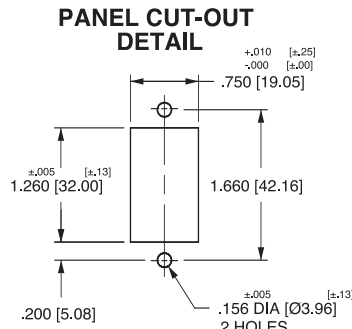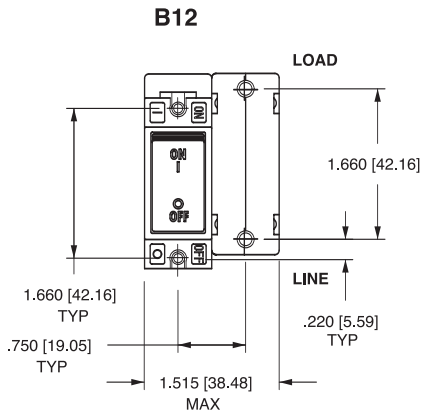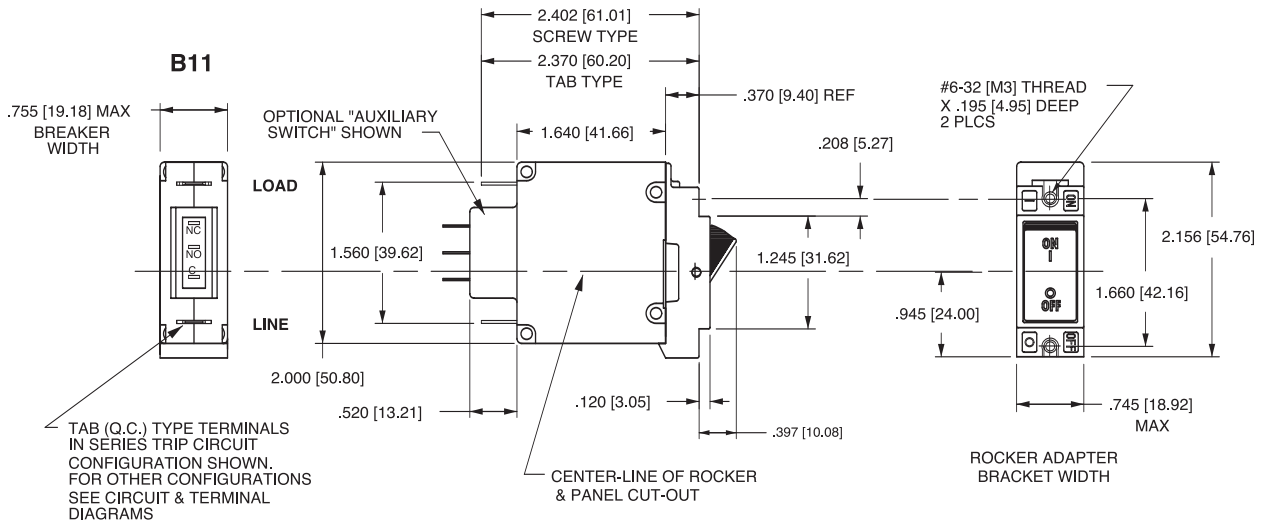

ACTUATOR SIDE VIEW
(SURFACE CONTOURS)



Notes:

- 1 All dimensions are in inches [millimeters].
- 2 For pole orientation with horizontal legend, rotate front view clockwise 90°.
- 3 Tolerance $\pm .020$ [.51] unless otherwise specified.