


# Supplementary Fuseblocks

## Type M, For 13/32" x 1 1/2" Fuses

### 600 Volt, 30 Amps

# BM Series

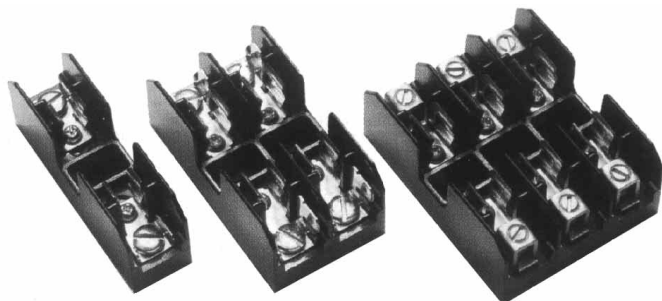

**Catalog Symbol:** BM Series

### Type M Supplementary Fuseblocks

For use with any 13/32" x 1 1/2" Fuses  
(Bussmann KTK, FNQ, FNM, BAF, BAN and AGU)

**Ampere Rating:** 1/10 to 30A

**Voltage Rating:** 600V

**Withstand Rating:** 10,000A RMS Sym. or interrupting rating of the fuse used, whichever is lower.

### Agency Information:

UL Recognized, UL 512, Guide IZLT2, File E14853

CSA Certified, C22.2 No. 39, Class 6225-01, File 47235


**UL Flammability:** 94VO

**Material:** Thermoplastic

**DIN-RAIL Adapters:** DRA-1 and DRA-2

### Catalog Data

Amps	Poles	Terminal Type			Fig. No.
		Screw with Quick Connect*	Pressure Plate w/ Quick Connect*	Box Lug	
1/10	1	BM6031SQ	BM6031PQ	BM6031B	1
to	2	BM6032SQ	BM6032PQ	BM6032B	2
30	3	BM6033SQ	BM6033PQ	BM6033B	3

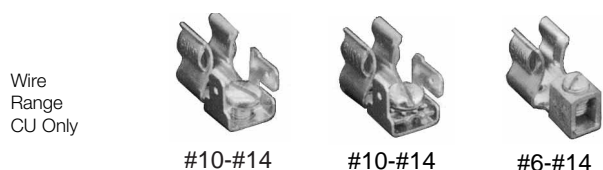

Wire Range  
CU Only

#10-#14

#10-#14


#6-#14

\* QUICK CONNECT RATED FOR 20A MAXIMUM.


CE CE logo denotes compliance with European Union Low Voltage Directive (50-1000 Vac, 75-1500 Vdc). Refer to Data Sheet: 8002 or contact Bussmann Application Engineering at 636-527-1270 for more information.

Dimensional Data All dimensions (±0.015)


### 1 POLE

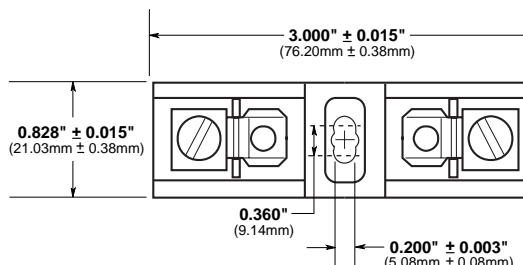


### 2 POLE

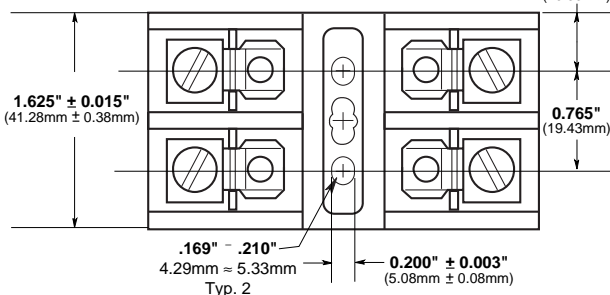

### 3 POLE

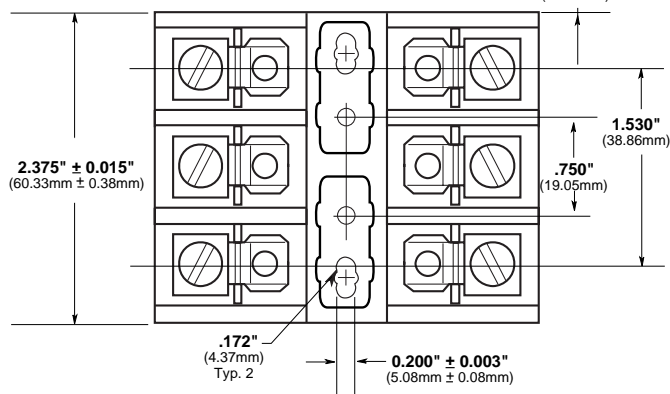

### FUSEBLOCK LABEL (EXAMPLE SHOWN)

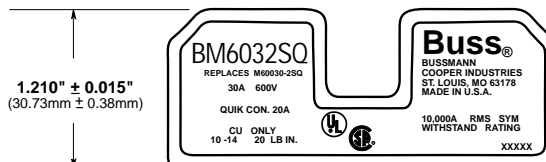

The only controlled copy of this Data Sheet is the electronic read-only version located on the Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.