



Agilent MSA-1105 Cascadable Silicon Bipolar MMIC Amplifier


Data Sheet

Description

The MSA-1105 is a high performance silicon bipolar Monolithic Microwave Integrated Circuit (MMIC) housed in a low cost, surface mount plastic package. This MMIC is designed for high dynamic range in either 50 or 75 Ω systems by combining low noise figure with high IP_3 . Typical applications include narrow and broadband linear amplifiers in commercial and industrial systems.

The MSA-series is fabricated using Agilent's 10 GHz f_T , 25 GHz f_{MAX} silicon bipolar MMIC process which uses nitride self-alignment, ion implantation, and gold metallization to achieve excellent performance, uniformity and reliability. The use of an external bias resistor for temperature and current stability also allows bias flexibility.


05 Plastic Package



Features

- **High Dynamic Range**
Cascadable 50 Ω or 75 Ω
Gain Block
- **3 dB Bandwidth:**
50 MHz to 1.3 GHz
- **17.5 dBm Typical $P_{1\text{ dB}}$ at 0.5 GHz**
- **3.6 dB Typical Noise Figure at 0.5 GHz**
- **Surface Mount Plastic Package**
- **Tape-and-Reel Packaging Option Available**
- **Lead-free Option Available**

Typical Biasing Configuration

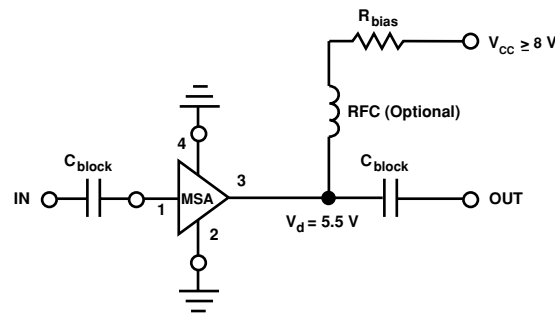

MSA-1105 Absolute Maximum Ratings

| Parameter | Absolute Maximum ^[1] |
|------------------------------------|---------------------------------|
| Device Current | 80 mA |
| Power Dissipation ^[2,3] | 550 mW |
| RF Input Power | +13 dBm |
| Junction Temperature | 150°C |
| Storage Temperature | -65 to 150°C |

Thermal Resistance^{[2]:}

$$\theta_{jc} = 125^{\circ}\text{C/W}$$

Notes:

1. Permanent damage may occur if any of these limits are exceeded.
2. $T_{\text{CASE}} = 25^{\circ}\text{C}$.
3. Derate at 8 mW/°C for $T_{\text{C}} > 124^{\circ}\text{C}$.

Electrical Specifications^[1], $T_{\text{A}} = 25^{\circ}\text{C}$

| Symbol | Parameters and Test Conditions: $I_{\text{d}} = 60 \text{ mA}$, $Z_{\text{o}} = 50 \Omega$ | Units | Min. | Typ. | Max. |
|-----------------------|---|--------------------|-------|------|---------|
| G _P | Power Gain ($ S_{21} ^2$) | f = 0.05 GHz | | | 12.7 |
| | | f = 0.5 GHz | dB | 10.0 | 12.0 |
| | | f = 1.0 GHz | dB | | 10.5 |
| ΔG_{P} | Gain Flatness | f = 0.1 to 1.0 GHz | dB | | ±1.0 |
| f _{3 dB} | 3 dB Bandwidth ^[2] | | GHz | | 1.3 |
| VSWR | Input VSWR | f = 0.1 to 1.0 GHz | | | 1.5:1 |
| | Output VSWR | f = 0.1 to 1.0 GHz | | | 1.7:1 |
| NF | 50 Ω Noise Figure | f = 0.5 GHz | dB | | 3.6 |
| P _{1 dB} | Output Power at 1 dB Gain Compression | f = 0.5 GHz | dBm | | 17.5 |
| IP ₃ | Third Order Intercept Point | f = 0.5 GHz | dBm | | 30.0 |
| t _D | Group Delay | f = 0.5 GHz | psec | | 200 |
| V _d | Device Voltage | | V | 4.4 | 5.5 6.6 |
| dV/dT | Device Voltage Temperature Coefficient | | mV/°C | | -8.0 |

Notes:

1. The recommended operating current range for this device is 40 to 70 mA. Typical performance as a function of current is on the following page.
2. Referenced from 50 MHz gain (G_P).

Ordering Information

| Part Numbers | No. of Devices | Comments |
|---------------|----------------|----------|
| MSA-1105-STR | 10 | Bulk |
| MSA-1105-STRG | 10 | Bulk |
| MSA-1105-TR1 | 500 | 7" Reel |
| MSA-1105-TR1G | 500 | 7" Reel |
| MSA-1105-TR2 | 1500 | 13" Reel |
| MSA-1105-TR2G | 1500 | 13" Reel |

Note: Order part number with a "G" suffix if lead-free option is desired.

MSA-1105 Typical Scattering Parameters ($Z_0 = 50 \Omega$, $T_A = 25^\circ\text{C}$, $I_d = 60 \text{ mA}$)

| Freq. GHz | S_{11} | | S_{21} | | | S_{12} | | | S_{22} | | k |
|--------------|----------|------|----------|------|-----|----------|------|-----|----------|------|------|
| | Mag | Ang | dB | Mag | Ang | dB | Mag | Ang | Mag | Ang | |
| .0005 | .80 | -17 | 19.0 | 8.94 | 171 | -26.0 | .050 | 51 | .81 | -16 | 0.53 |
| .005 | .26 | -62 | 13.9 | 4.98 | 163 | -16.8 | .144 | 15 | .26 | -64 | 0.93 |
| .025 | .07 | -48 | 12.8 | 4.36 | 174 | -16.4 | .151 | 4 | .08 | -52 | 1.08 |
| .050 | .06 | -38 | 12.7 | 4.33 | 174 | -16.3 | .153 | 2 | .06 | -48 | 1.08 |
| .100 | .05 | -41 | 12.7 | 4.31 | 170 | -16.4 | .152 | 3 | .06 | -52 | 1.09 |
| .200 | .06 | -58 | 12.6 | 4.26 | 162 | -16.2 | .155 | 5 | .08 | -73 | 1.08 |
| .300 | .07 | -74 | 12.4 | 4.19 | 154 | -16.1 | .157 | 7 | .10 | -91 | 1.07 |
| .400 | .09 | -91 | 12.2 | 4.10 | 146 | -15.8 | .163 | 8 | .12 | -105 | 1.06 |
| .500 | .10 | -105 | 12.0 | 4.00 | 138 | -15.6 | .166 | 8 | .14 | -116 | 1.05 |
| .600 | .11 | -116 | 11.8 | 3.88 | 131 | -15.4 | .171 | 10 | .17 | -126 | 1.04 |
| .700 | .13 | -128 | 11.5 | 3.76 | 123 | -15.0 | .178 | 11 | .18 | -135 | 1.03 |
| .800 | .15 | -136 | 11.2 | 3.63 | 116 | -14.7 | .184 | 11 | .21 | -144 | 1.01 |
| .900 | .16 | -145 | 10.9 | 3.49 | 109 | -15.5 | .188 | 11 | .22 | -151 | 1.01 |
| 1.000 | .18 | -152 | 10.5 | 3.37 | 102 | -14.1 | .197 | 11 | .24 | -159 | 1.00 |
| 1.500 | .28 | 174 | 8.8 | 2.75 | 72 | -13.2 | .219 | 7 | .31 | 170 | 1.00 |
| 2.000 | .38 | 150 | 7.1 | 2.28 | 48 | -12.1 | .248 | 0 | .34 | 151 | 0.99 |
| 2.500 | .46 | 133 | 5.6 | 1.90 | 28 | -11.9 | .254 | -4 | .38 | 134 | 1.02 |
| 3.000 | .53 | 118 | 4.2 | 1.62 | 11 | -11.6 | .262 | -8 | .40 | 122 | 1.04 |

Typical Performance, $T_A = 25^\circ\text{C}$, $Z_0 = 50 \Omega$

(unless otherwise noted)

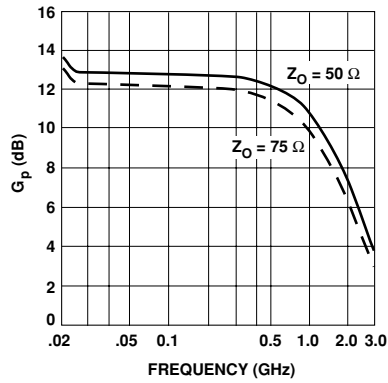


Figure 1. Typical Power Gain vs. Frequency, $I_d = 60 \text{ mA}$.

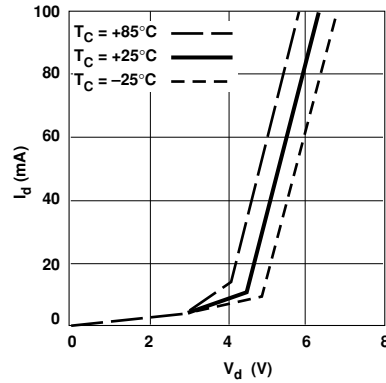


Figure 2. Device Current vs. Voltage.

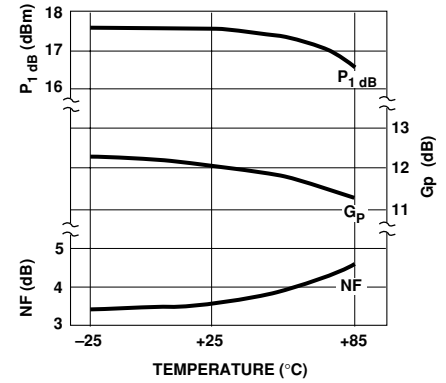


Figure 3. Output Power at 1 dB Gain Compression, Noise Figure and Power Gain vs. Case Temperature, $f = 0.5 \text{ GHz}$, $I_d = 60 \text{ mA}$.

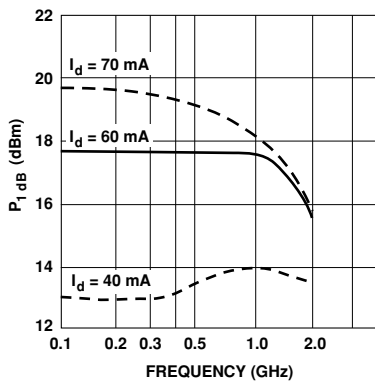


Figure 4. Output Power at 1 dB Gain Compression vs. Frequency.


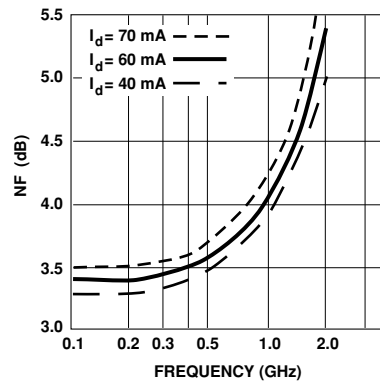


Figure 5. Noise Figure vs. Frequency.

05 Plastic Package Dimensions

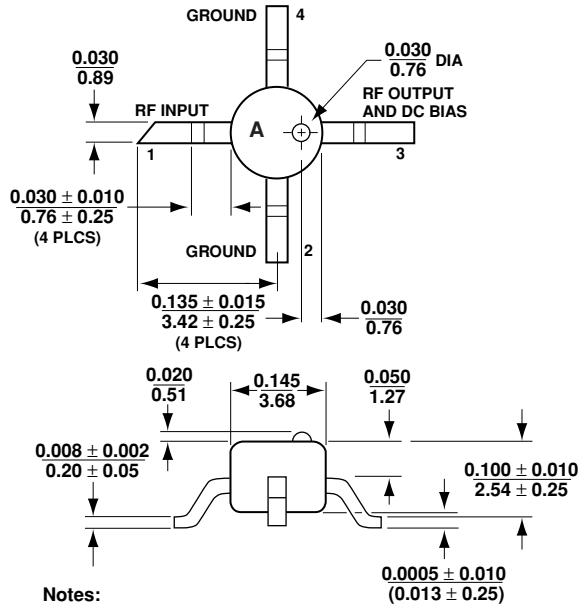

Notes:

(unless otherwise specified)

1. Dimensions are $\frac{\text{in}}{\text{mm}}$
2. Tolerances
in .xxx = ± 0.005
mm .xx = ± 0.13

www.agilent.com/semiconductors

For product information and a complete list of distributors, please go to our web site.

For technical assistance call:

Americas/Canada: +1 (800) 235-0312 or
(916) 788-6763

Europe: +49 (0) 6441 92460

China: 10800 650 0017

Hong Kong: (65) 6756 2394

India, Australia, New Zealand: (65) 6755 1939

Japan: (+81 3) 3335-8152(Domestic/International), or
0120-61-1280(Domestic Only)

Korea: (65) 6755 1989

Singapore, Malaysia, Vietnam, Thailand, Philippines,
Indonesia: (65) 6755 2044

Taiwan: (65) 6755 1843

Data subject to change.

Copyright © 2005 Agilent Technologies, Inc.

Obsoletes 5965-9557E

April 5, 2005

5989-2746EN



Agilent Technologies