


DWG NO. 608687

UNIT OF MEASURE	A	B	C	D	E	L		MAX. BUNDLE DIA.	MIN. TENSILE STRENGTH
INCHES	.181	.170	.100	.164	.045	7.96		2.0	18 lbs.
MM	4.60	4.32	2.54	4.17	1.14	202.		50.8	8.165 kg.

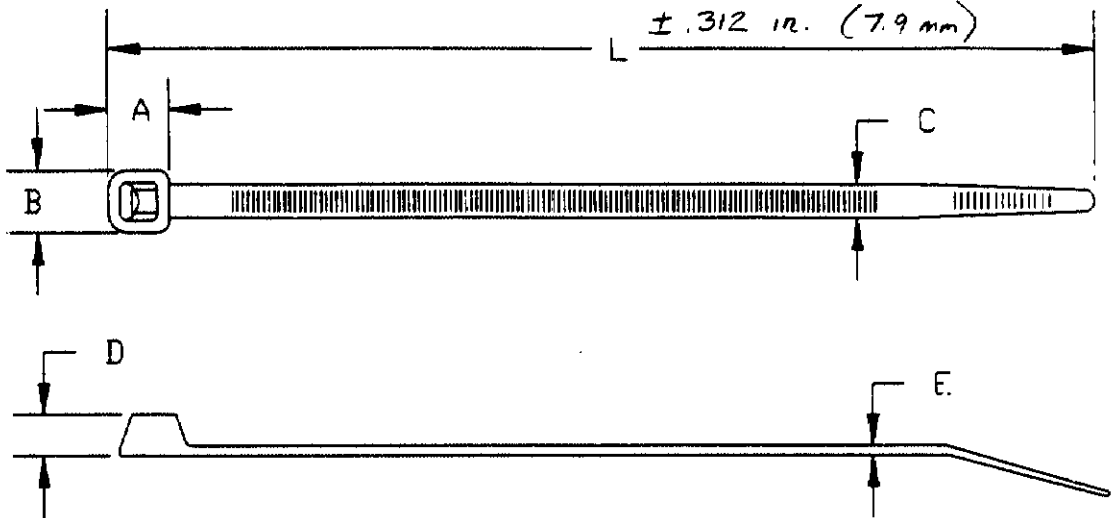

NOTES:

1. MOISTURIZED 1 TO 2.5% WATER.
2. PACKAGED IN HEAT SEALED 3 MIL POLYBAG **AMP ENGINEERING** WITH LABEL PER DWG 404707.
3. MIL No. MS3367-4.

JUL 13 1990

ISSUED BY *Allen*

CUSTOMER DRAWING UNPUBLISHED

2-608687-0	BLACK 1000 TY2MB	
1-608687-0	BLACK 100 TY2CB	
2-608687-9	NATURAL 1000 TY2M	
1-608687-9	NATURAL 100 TY2C	

LOC	DWG SIZE	PART No.	DESCRIPTION	ITEM NO
D				

REVISION OF EACH ASSY NO. (WHEN BLANK, USE DWG REVISION)

QTY. REQ'D. PER ASSY.		PARTS LIST		
		MATERIAL	HEAT TREAT	FINISH
		DIMENSIONS ARE IN INCHES TOLERANCES UNLESS OTHERWISE SPECIFIED: 2 PL DEC $\pm$ 3 PL DEC $\pm$ .039 4 PL DEC $\pm$ ANGLES $\pm$ SURF TEXTURE: $\checkmark$ REMOVE BURRS, BREAK SHARP EDGES, .015 R. MAX.	DRAWN BY: <b>AD-TEK/VL</b>	DATE: 8/28/90
			APPROVED BY: <i>J. Hamed 6/90</i>	RELEASE:
			<b>AMP</b>   AMP INCORPORATED Harrisburg, Pa.	
			NAME: <b>CABLE TIE 8 INCH</b>	

P	F	LTR	REVISION RECORD	APP	DATE	SCALE: <b>A</b>	DRAWING No.: <b>608687</b>	SHEET: <b>1 OF 1</b>	REV.: <b>G</b>
---	---	-----	-----------------	-----	------	-----------------	----------------------------	----------------------	----------------

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN AMP PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM AMP INCORPORATED, HARRISBURG, PA.