


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION, 19 .
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
	J	ADDED: 3/0 & 4/0; NPR C98-056 & EC 0N20-0006-98	16MAR98	DLD	EJH

1. PACKAGED IN A HEAT SEALED 3 MIL POLYBAG.
2. MAXIMUM BUNDLE DIAMETER: 34.93[1.38].
3. MINIMUM TENSILE STRENGTH: 22.68 KG[50 LBS].

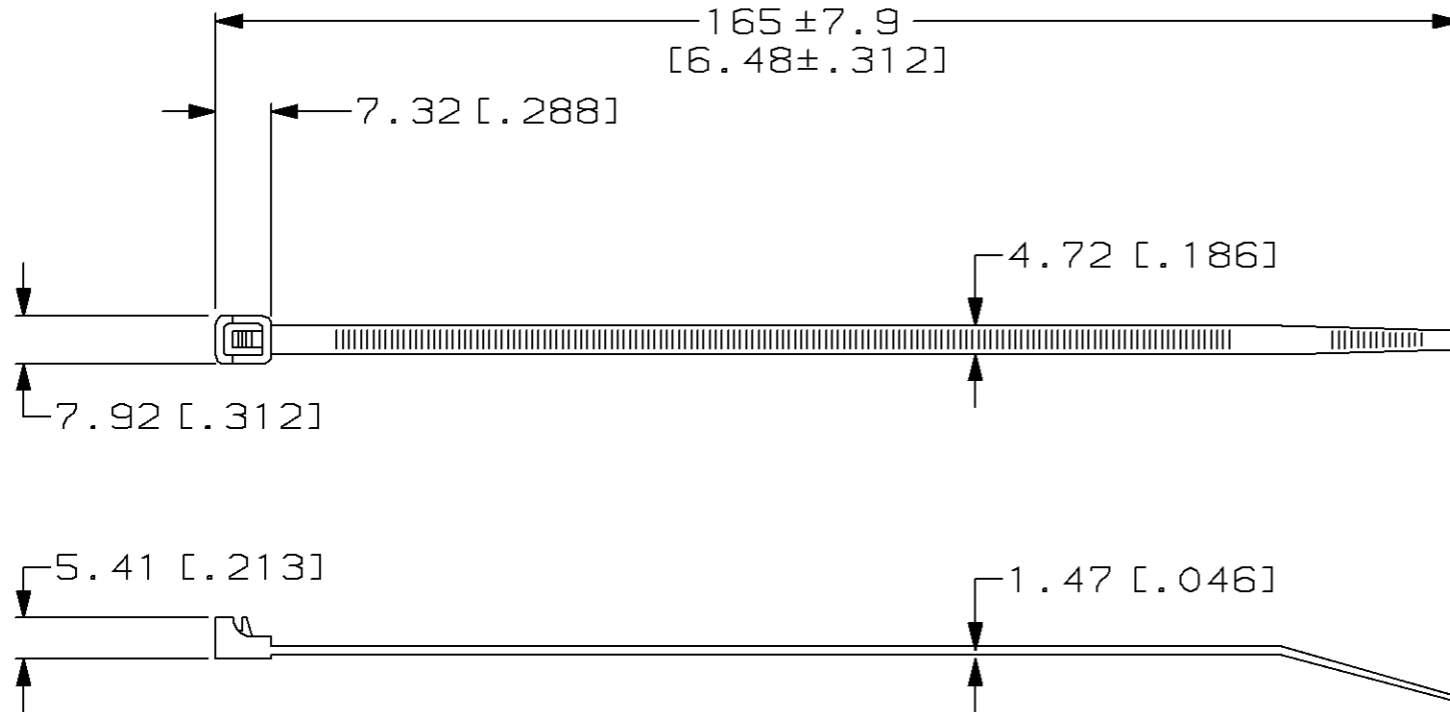

QUANTITY/BAG	COLOR	PART NUMBER
1000	PURPLE	4-608692-0
100	PURPLE	3-608692-0
1000	BLACK	2-608692-0
100	NATURAL	2-608692-9
1000	BLACK	1-608692-0
100	NATURAL	1-608692-9

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DL DRUMMOND 16 MAR 98	AMP Incorporated Harrisburg, PA 17105-3608	
DIMENSIONS: mm [INCHES]		CHK DL DRUMMOND 16 MAR 98		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD EJ HRYN 18 MAR 98	NAME	
0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±0.99 [.039] 4 PLC ±- ANGLES ±-		PRODUCT SPEC	CABLE TIE, RELEASABLE, 6-1/2"	
MATERIAL -		APPLICATION SPEC	SIZE	RESTRICTED TO
FINISH -		WEIGHT -	A300779	C-608692
		CUSTOMER DRAWING	SCALE NONE	SHEET 1 OF 1
				REV J