


DRAWING MADE IN THIRD ANGLE PROJECTION

DWG NO. 608693

UNIT OF MEASURE	A	B	C	D	E	G	L	MAX. BUNDLE DIA.	MIN. TENSILE STRENGTH
INCHES	.534	.285	.142	.198	.046	.170	6.37	1.25	30 lbs.
MM	13.56	7.24	3.61	5.03	1.17	4.32	162.	31.75	13.608 kg.

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN AMP PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM AMP INCORPORATED, HARRISBURG, PA.

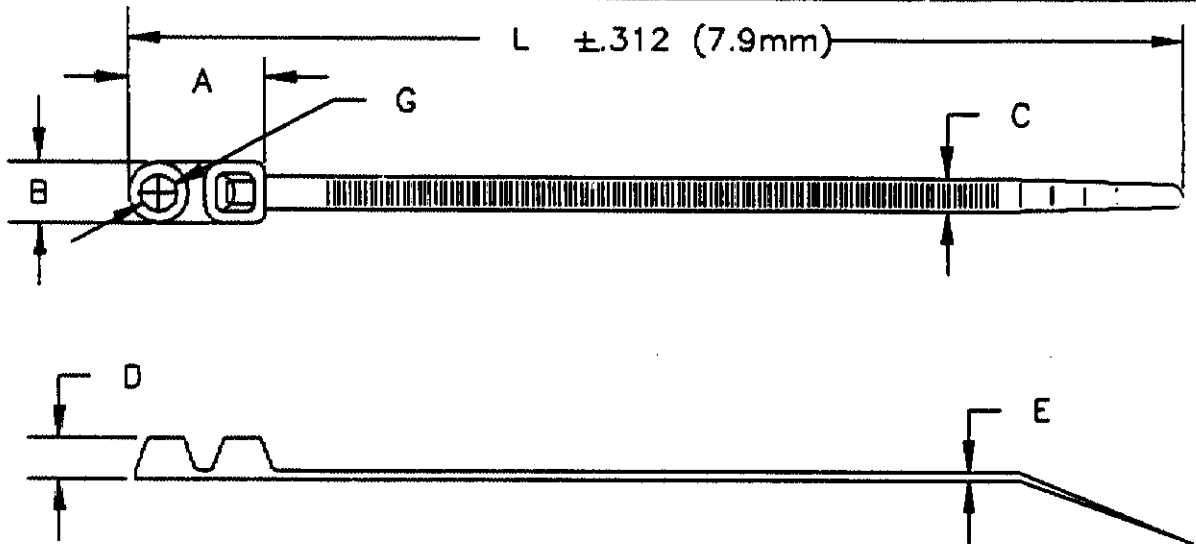

NOTES:

1. MOISTURIZED 1 TO 2.5% WATER.
2. PACKAGED IN HEAT SEALED 3 MIL POLYBAG WITH LABEL PER DWG 404707.

APC ENGINEERING

JUL 13 1990

ISSUED BY *acm*

CUSTOMER DRAWING UNPUBLISHED

	2-608693-9	NATURAL-1000 PCS. SMTY114M	
	1-608693-9	NATURAL-100 PCS. SMTY114C	
	2-608693-0	BLACK-1000 PCS. SMTY114MB	
	1-608693-0	BLACK-100 PCS. SMTY114CB	

LOC	DWG SIZE	PART No.	DESCRIPTION	ITEM NO
D				
QTY. REQ'D. PER ASSY.	REVISION OF EACH ASSY NO. (WHEN BLANK, USE DWG REVISION)			
1	PARTS LIST			

QTY.	REV.	DESCRIPTION	DATE	MATERIAL	HEAT TREAT	FINISH
				NYLON 6/6		
				DIMENSIONS ARE IN INCHES	DRAWN BY: AD-TEK/VL	DATE: 6/22/90
				TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHECK BY: BTM 6/190	APPROVED BY: J. Haines 6/190
				2 PL DEC ±	AMP AMP INCORPORATED Harrisburg, Pa.	
				3 PL DEC ± .030		
				4 PL DEC ±		
				ANGLES ±		
				SURF TEXTURE: J	NAME: # 8 SCREW MOUNT CABLE TIE 6-1/4 INCH	
				REMOVE BURRS, BREAK SHARP EDGES. .015 R. MAX.		
				SCALE: A	DRAWING No. 608693	SHEET: 1 OF 1
				APP DATE		REV.: 0