

# “High Frequency Ceramic Solutions”

## 890 MHz Directional Coupler

P/N 0898CP15A035


Detail Specification Page 1 of 3

Part Number	Frequency (MHz)	Insertion Loss	Return Loss	Coupling	Isolation
0898CP15A035_	880 - 915	0.5 dB max	14 dB min.	20 ± 1.0 dB	25.0 dB min.

Input Power	Impedance	Operating Temperature Range	Reel Qty
3 Watts max	50 Ω	-40 to +85°C	4000


### Mechanical Dimensions

	L	W	T	a	b	c	g	p
Inches	0.079 ± .004	0.049 ± .004	0.034 ± .004	0.012 ± .004	0.008 ± .004	0.012 + .004/- .008	0.014 ± .004	0.026 ± .002
mm	2.0 ± 0.1	1.25 ± 0.1	0.85 ± 0.1	0.30 ± 0.1	0.20 ± 0.1	0.30+0.1/-0.2	0.35 ± 0.1	0.65 ± 0.05

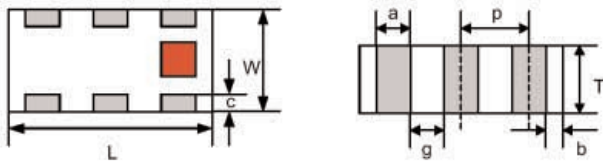


### Terminal Configuration

1	IN	4	Termination
2	GND	5	GND
3	Main Out	6	Coupled Out



### Mounting Considerations

Mount these devices with brown colored side facing up. Line width should be designed to provide 50Ω impedance matching characteristics.

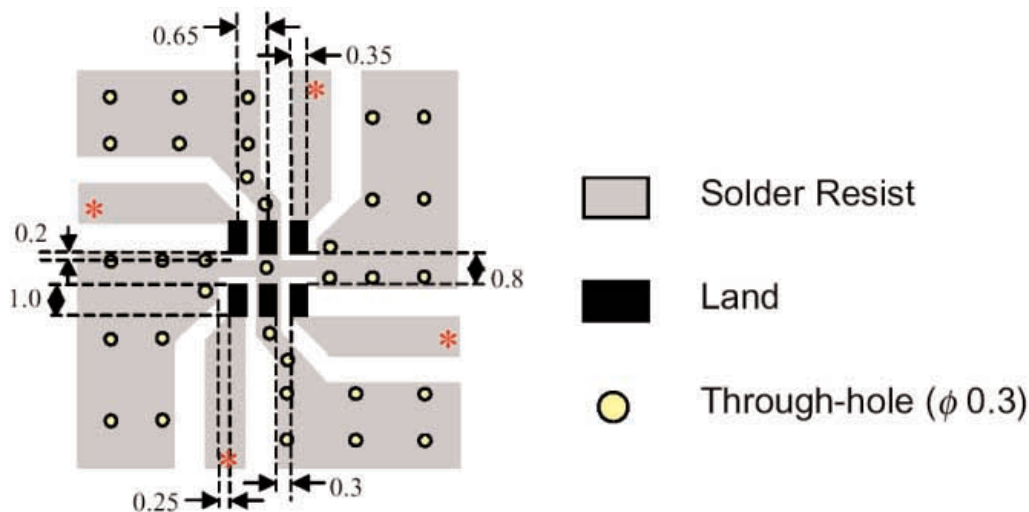

Johanson Technology, Inc. reserves the right to make design changes without notice.  
All sales are subject to Johanson Technology, Inc. terms and conditions.


# “High Frequency Ceramic Solutions”

890 MHz Directional Coupler


P/N 0898CP15A035

Detail Specification Page 2 of 3

P/N 0898CP15A035 Coupler  
Typical Coupling & Isolation

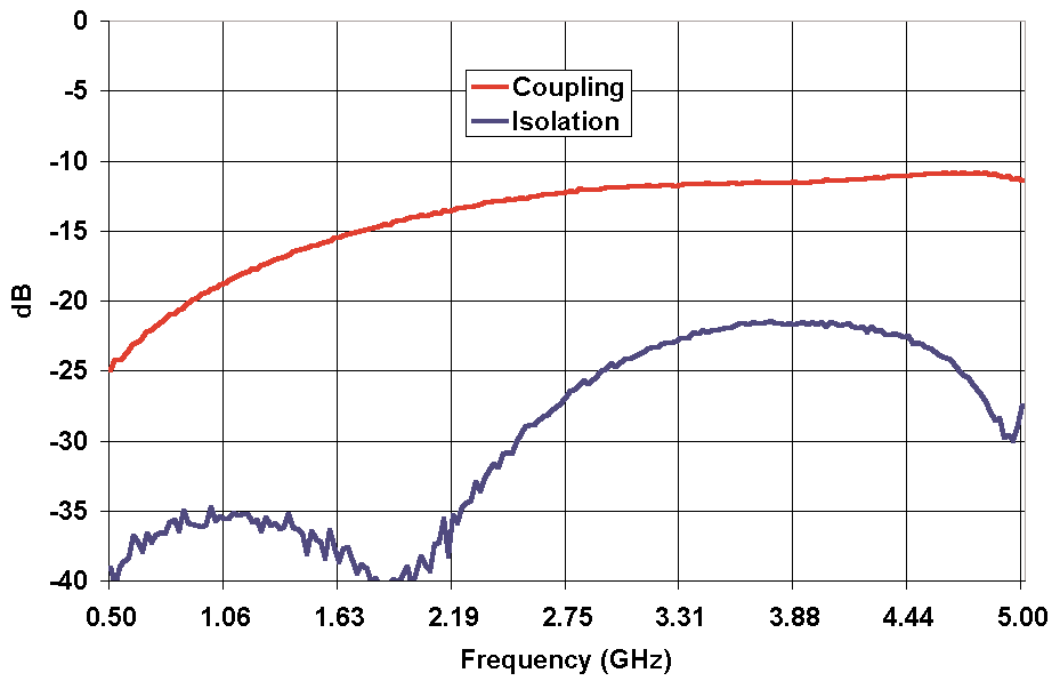

P/N 0898CP15A035 Coupler  
Typical Return Loss

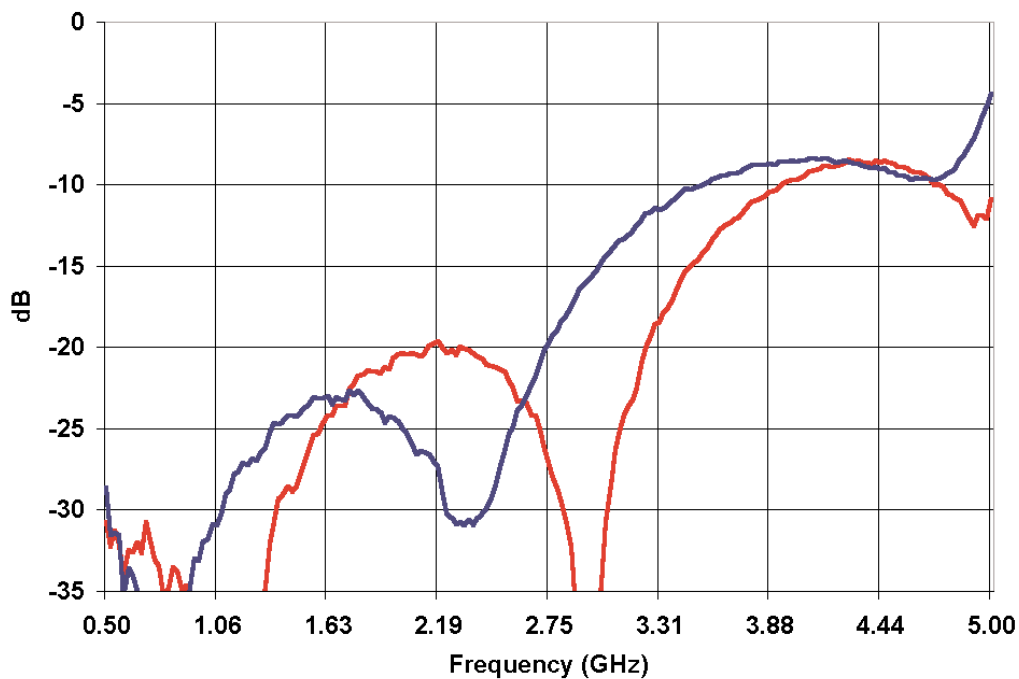

# “High Frequency Ceramic Solutions”

890 MHz Directional Coupler

P/N 0898CP15A035

Detail Specification Page 3 of 3

P/N 0898CP15A035 Coupler  
Typical Insertion Loss

