


UNIT OF MEASURE	A	B	C	D	E	G	L	MAX. BUNDLE DIA.	MIN. TENSILE STRENGTH
INCHES	.787	.346	.188	.242	.049	.212	8.48	1.75	50 lbs.
MM	19.99	8.79	4.78	6.15	1.24	5.38	215.	44.45	22.68 kg.

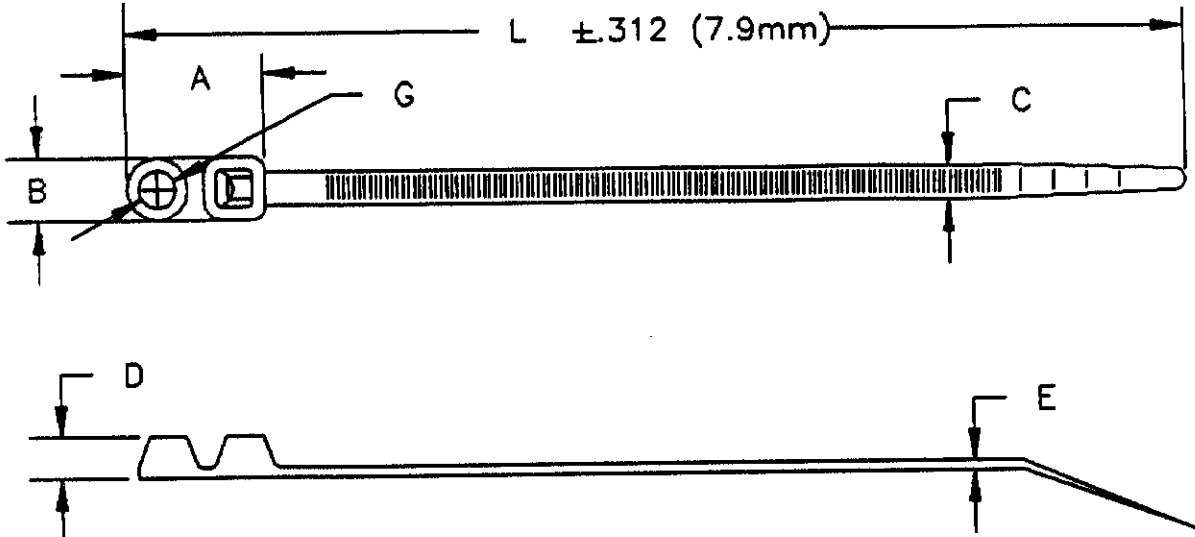

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN AMP PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM AMP INCORPORATED, HARRISBURG, PA.

NOTES:

1. MOISTURIZED 1 TO 2.5% WATER.
2. PACKAGED IN HEAT SEALED 3 MIL POLYBAG WITH LABEL PER DWG 404707.

APC ENGINEERING

JUL 13 1990

ISSUED BY *CCU*

CUSTOMER DRAWING UNPUBLISHED

	2-608694-9	NATURAL-1000 PCS. SMY134M	
	1-608694-9	NATURAL-100 PCS. SMY134C	
	2-608694-0	BLACK-1000 PCS. SMY134MB	
	1-608694-0	BLACK-100 PCS. SMY134CB	

LOC	DIST	DWG SIZE	PART No.	DESCRIPTION	ITEM NO
D	1				
REVISION OF EACH ASSY NO. (WHEN BLANK, USE DWG REVISION)					
QTY. REQ'D. PER ASSY.			PARTS LIST		
MATERIAL		HEAT TREAT		FINISH	
NYLON 6/6					
DIMENSIONS ARE IN INCHES		DRAWN BY:	DATE:	APPROVED BY:	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		<i>AD-TEK/VL</i>	8/22/90		
2 PL DEC ±		CHECK BY:	RELEASE:		
3 PL DEC ± .030		<i>BJM 6/90</i>	<i>J. Hanes 6/90</i>		
4 PL DEC ±		AMP AMP INCORPORATED Harrisburg, Pa.			
ANGLES ±		NAME: # 10 SCREW MOUNT			
SURF TEXTURE: <i>J</i>		CABLE TIE 8-1/2 INCH			
REMOVE BURRS, BREAK SHARP EDGES, .015 R. MAX.		SCALE:	DRAWING No.:	SHEET:	REV.:
✓ <i>ECN 062890</i>		<i>7MB 6/90</i>	A	1 OF 1	0
P	F	LTR	REVISION RECORD	APP	DATE