




ELECTRICAL GROUP

Product Bulletin

CONTOUR-TY™ Cable Ties

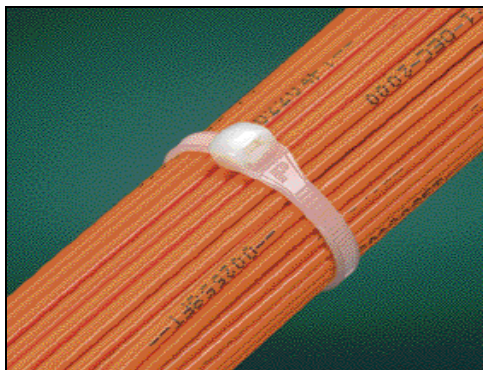

- Unique design avoids abrasion to cables.
- The reliable locking mechanism insures consistent strength and lasting performance.
- Available in five cross sections to meet your application:
 - Miniature
 - Intermediate
 - Standard
 - Heavy-Standard **NEW!**
 - Light-Heavy
- Available in Natural Nylon 6.6 (indoor use) or Weather Resistant Black Nylon 6.6 (outdoor use) for a wide variety of applications.

Features:

- Tie configuration limits exposure to sharp edges
- Low profile head
- Locking wedge is fully enclosed
- Fully rounded edges on head and strap
- Rounded tip and aggressive grip


Benefits:

- Protects adjacent cables and protects workers arms/hands
- Avoids snags and reduces overall bundle size
- Less interference with adjacent bundles
- No sharp edges in contact with cable insulation/jacket
- Faster initial threading



ELECTRICAL GROUP

CONTOUR-TY™ Cable Ties

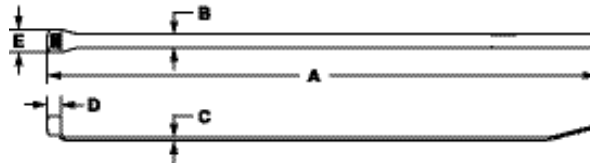

Part Number	Length A In. (mm)	Width B In. (mm)	Thickness C In. (mm)	Head Height D In. (mm)	Head Width E In. (mm)	Max. Bundle Dia. In. (mm)	Min. Loop Tensile Strength Lbs. (N)	Recommended PANDUIT Installation Tool Part No.	Packaging*								
									Std. Pkg. Qty.	Std. Ctn. Qty.	Bulk Pkg. Qty.	Bulk Ctn. Qty.					
Miniature Cross Section																	
CBR1M-M	4.1 (104)	.098 (2.5)	.038 (1.0)	.140 (3.6)	.195 (5.0)	1.00 (25.4)	18 (80)	GTS, GS2B, PPTS	—	—	1000	50000					
CBR1M-M0																	
CBR1.5M-M	5.6 (142)		.209 (5.3)	.042 (1.1)	.146 (3.7)	.209 (5.3)			1.50 (38.1)	—	—	1000	50000				
CBR1.5M-M0																	
CBR2M-M	7.2 (183)					2.00 (50.8)			—	—	1000	25000					
CBR2M-M0																	
Intermediate Cross Section																	
CBR1.5I-M	5.9 (150)	.140 (3.6)	.040 (1.0)	.180 (4.6)	.250 (6.4)	1.50 (38.1)	40 (178)	GTS, GS2B, PPTS	—	—	1000	25000					
CBR1.5I-M0																	
CBR3I-M	10.4 (264)		.052 (1.3)	.192 (4.9)	.262 (6.7)	.262 (6.7)			3.00 (76.2)	—	—	1000	10000				
CBR3I-M0																	
CBR4I-M	13.6 (345)					4.00 (101.6)			—	—	1000	10000					
CBR4I-M0																	
Standard Cross Section																	
CBR2S-M	7.6 (193)	.190 (4.8)	.044 (1.1)	.190 (4.8)		2.00 (50.8)	50 (222)	GTS, GS2B, PPTS	—	—	1000	10000					
CBR2S-M0																	
CBR3S-M	10.8 (274)		.052 (1.3)	.215 (5.5)	.332 (8.4)	.332 (8.4)			3.00 (76.2)	—	—	1000	5000				
CBR3S-M0																	
CBR4S-M	14.0 (356)					4.00 (101.6)			—	—	1000	5000					
CBR4S-M0																	
NEW! Heavy-Standard Cross Section																	
CBR2HS-D	8.0 (203)	.250 (6.4)	.058 (1.4)	.240 (6.1)	.388 (9.9)	2.00 (50.8)	85 (378)	GS4H, PPTEH	—	—	500	5000					
CBR2HS-D0																	
Light-Heavy Cross Section																	
CBR4LH-TL	14.6 (371)	.300 (7.6)	.070 (1.8)	.322 (8.2)	.475 (12.1)	4.00 (101.6)	120 (532)	GS4H, PPTEH	—	—	250	2500					
CBR4LH-TL0																	
CBR6LH-C	20.9 (531)					6.00 (152.4)									—	—	100
CBR6LH-C0																	

*Order the number of pieces required in multiples of package quantities.

Our products are warranted to be free from defects in material and workmanship at the time of sale but our obligation under this warranty is limited to the replacement of any product proved to be defective within 6 months (for product) or 90 days (for tools) from the date of delivery. Tool warranty is void if Panduit tools are modified, altered or misused in any way. Use of Panduit tooling with any product other than the specified Panduit products for which the tool was designed, constitutes misuse. Before using, user shall determine the suitability of the product for his intended use and user assumes all risk and liability whatsoever in connection therewith.

This warranty is made in lieu of and excludes all other warranties, expressed or implied. THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR USE ARE SPECIFICALLY EXCLUDED. Neither seller nor manufacturer shall be liable for any other injury, loss or damage, whether direct or consequential, arising out of the use of, or the inability to use, the product.

The information contained in this literature is based on our experience to date and is believed to be reliable. It is intended as a guide for use by persons having technical skill at their own discretion and risk. We do not guarantee favorable results or assume any liability in connection with its use. Dimensions contained herein are for reference purposes only. For specific dimensional requirements consult the factory. This publication is not to be taken as a license to operate under, or a recommendation to infringe any existing patents. This supersedes and voids all previous literature, etc.



ELECTRICAL GROUP

Panduit Corp.
Tinley Park, IL 60477-3091

Panduit Canada
Div. of Panduit Corp.
140 Amber Street
Markham, Ontario L3R 3J8

For Customer Service, contact:
Phone: 800-777-3300 Fax: 708-532-1811
For Technical Support, contact: 866-405-6660

email: ctinfo@panduit.com website: www.panduit.com/eg

**For Pricing and Further Information –
Contact your local
PANDUIT Distributor or Sales Office**