


DWG NO. 608696

UNIT OF MEASURE	A	B	C	D	E	G	L	MAX. BUNDLE DIA.	MIN. TENSILE STRENGTH
INCHES	1.081	.520	.307	.323	.080	.256	16.24	4.0	120 lbs.
MM	27.46	13.21	7.80	8.20	2.03	6.50	413.	101.5	54.43 kg.

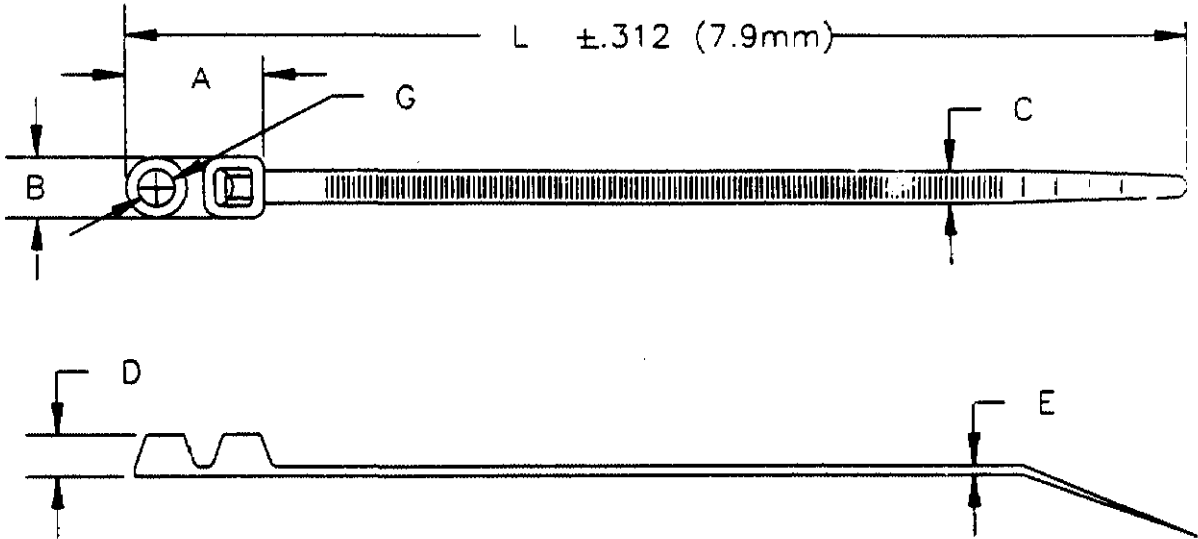

NOTES:

1. MOISTURIZED 1 TO 2.5% WATER.
2. PACKAGED IN HEAT SEALED 3 MIL POLYBAG WITH LABEL PER DWG 404707.

APC ENGINEERING

JUL 13 1990

ISSUED BY *Alcu*

CUSTOMER DRAWING UNPUBLISHED

	3-608696-9	NATURAL-500 PCS. SMTY4HL	
	4-608696-9	NATURAL-50 PCS. SMTY4HD	
	3-608696-0	BLACK-500 PCS. SMTY4HLB	
	4-608696-0	BLACK-50 PCS. SMTY4HDB	

LOC	DWG SIZE	PART No.	DESCRIPTION	ITEM NO
D				
DIST		← REVISION OF EACH ASSY NO. (WHEN BLANK, USE DWG REVISION)		
1		QTY. REQ'D. PER ASSY.		

MATERIAL				HEAT TREAT		FINISH	
NYLON 6/6							
DIMENSIONS ARE IN INCHES				DRAWN BY: AD-TEK/VL		DATE: 7/3/90	
TOLERANCES UNLESS OTHER USE SPECIFIED:				CHECK BY: BSM 7/90		APPROVED BY: J. Hamed 7/5/90	
2 PL DEC ±				AMP AMP INCORPORATED Harrisburg, Pa.			
3 PL DEC ± .039							
4 PL DEC ±							
ANGLES ±				NAME: 1/4in. SCREW MOUNT			
SURF TEXTURE: J				CABLE TIE 16 1/4 INCH			
REMOVE BURRS, BREAK SHARP EDGES, .015 R. MAX.				SCALE: A		DRAWING No.: 608696	
✓ 0 ECN 062890 REVISION RECORD APP DATE				SHEET: 1 OF 1		REV: 0	

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN AMP PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM AMP INCORPORATED, HARRISBURG, PA.