



PANDUIT PART NO.	MAX. BUNDLE DIA.	PACKAGE QTY.	LENGTH "L" ±.3 [7] [Ⓐ]
MLT2.7WLH-LP	2.7" [69]	50	10.2" [259]
MLT4WLH-LP	4" [102]	50	14.3" [362]
MLT6WLH-LP	6" [152]	50	20.5" [521]
MLT8WLH-LP	8" [203]	50	26.8" [679] [Ⓑ]

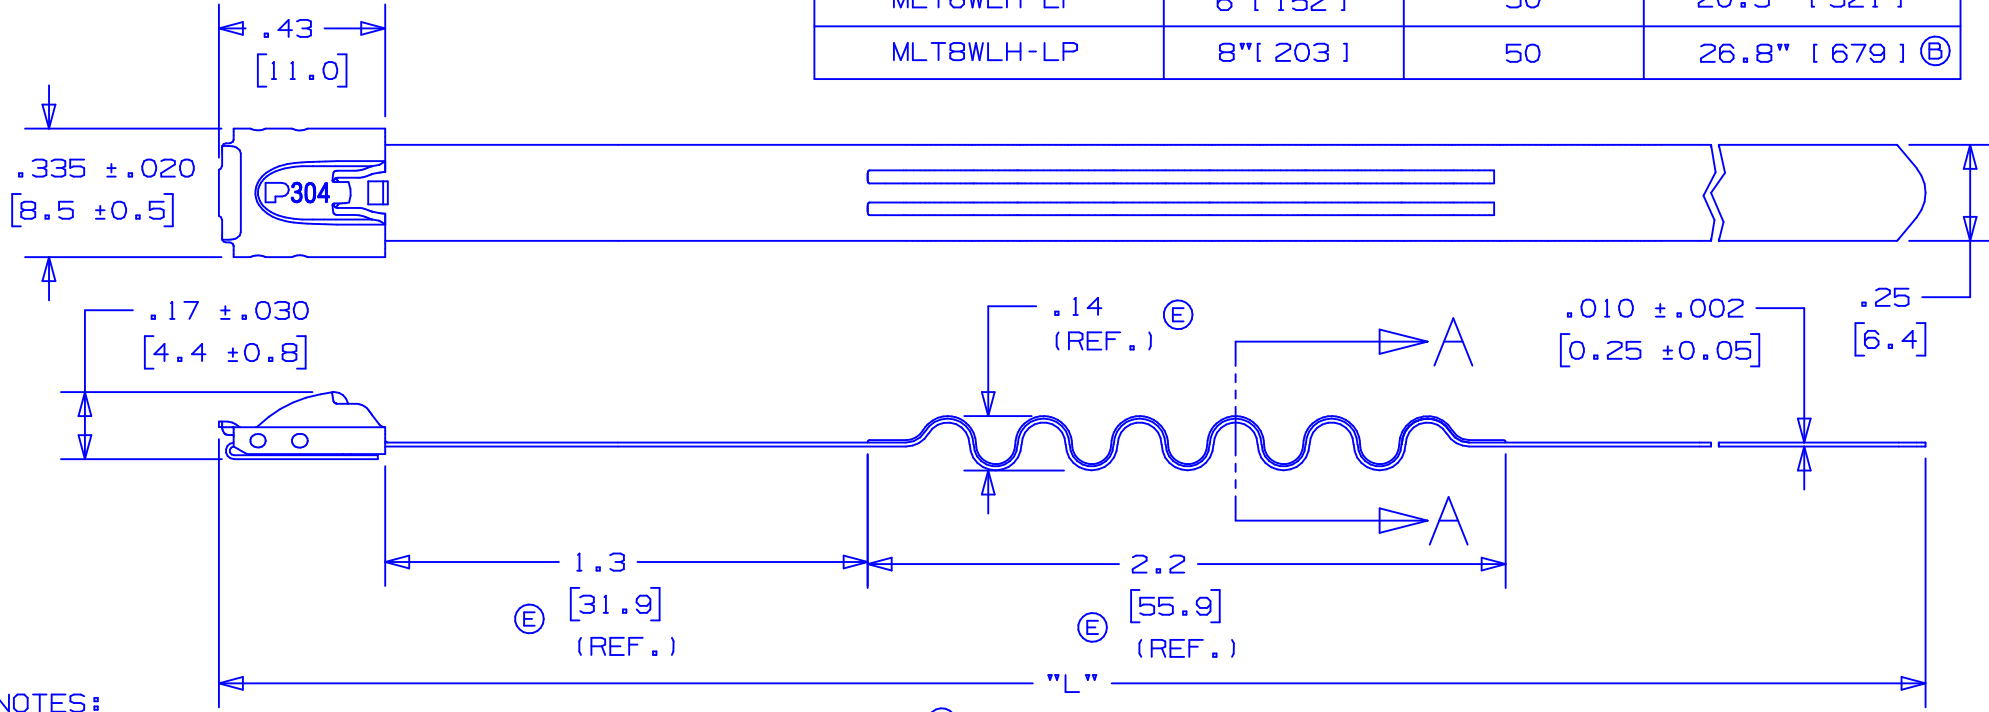

NOTES:

1. APPLICATION TOOLS - PPTMT, GS4MT, ST2MT, ST3MT, AND HTMT
2. MINIMUM LOOP TENSILE STRENGTH - 250 LBS. (1112 NEWTONS) WHEN TESTED ON A 3" MANDREL. PART NO. MLT2.7WLH-LP TESTED ON A 1 1/2" MANDREL.
3. [] DENOTES DIMENSION IN MILLIMETERS.
4. TOLERANCES: .XXX = ±.010 [.25]
 .XX = ±.02 [.5]
 .X = ±.03 [.8]
 ANGLES = ±2°
5. MATERIAL: 304 STAINLESS STEEL

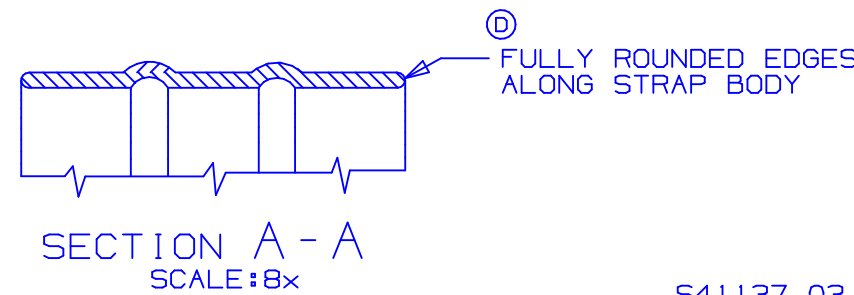

S41137_03

REV	DATE	BY	CHK	DESCRIPTION	ECN #	PM	CUST
03	8/04	JAMB		Ⓔ REMOVED "AISI NO.1 FULL RADIUS" & REPLACED WITH "FULLY ROUNDED" Ⓔ ADDED "REF" TO DIM'S.	11907		
02	10/03	BRH	DPN	Ⓒ ADDED ST3MT TO APPLICATION TOOL NOTE	11162	CCH	JJB
01	6/03	JAMB	DPN	Ⓐ TOL. WAS ±.2 [5] Ⓑ LGTH. [mm] WAS [681]	10568	CCH	JJB
00	3/03	JAMB	DPN	RELEASED	10563	CCH	JJB

PANDUIT CORP.

TINLEY PARK, ILLINOIS

WAVE-TY
LIGHT-HEAVY 304 STAINLESS STEEL

DRAWN BY	CHK'D	SCALE	DRAWING NO.
JAMB	DPN	2x	S41137