


(A)

| PANDUIT PART NO. | MAX BUNDLE DIA. | PACKAGE QTY | LENGTH "L" ±.3 [7] |
|------------------|-----------------|-------------|--------------------|
| MLT2.7WS-LP      | 2.7" [69]       | 50          | 10.2" [259]        |
| MLT4WS-LP        | 4" [102]        | 50          | 14.3" [362]        |
| MLT6WS-LP        | 6" [152]        | 50          | 20.5" [521]        |
| MLT8WS-LP        | 8" [203]        | 50          | 26.8" [679]        |


(B)

NOTES:

- 1.) APPLICATION TOOLS - GS4MT, PPTMT, ST2MT, ST3MT, HTMT
- 2.) MINIMUM LOOP TENSILE STRENGTH - 200 LBS (890 NEWTONS) WHEN TESTED ON A 3" MANDREL. PART NO. MLT2.7WS-LP TESTED ON A 1 1/2" MANDREL.
- 3.) [ ] DENOTES DIMENSION IN MILLIMETERS
- 4.) TOLERANCES:  
 .XXX = ±.010 [.25]  
 .XX = ±.02 [.5]  
 .X = ±.03 [.8]  
 ANGLES = ±2°
- 5.) MATERIAL: 304 STAINLESS STEEL

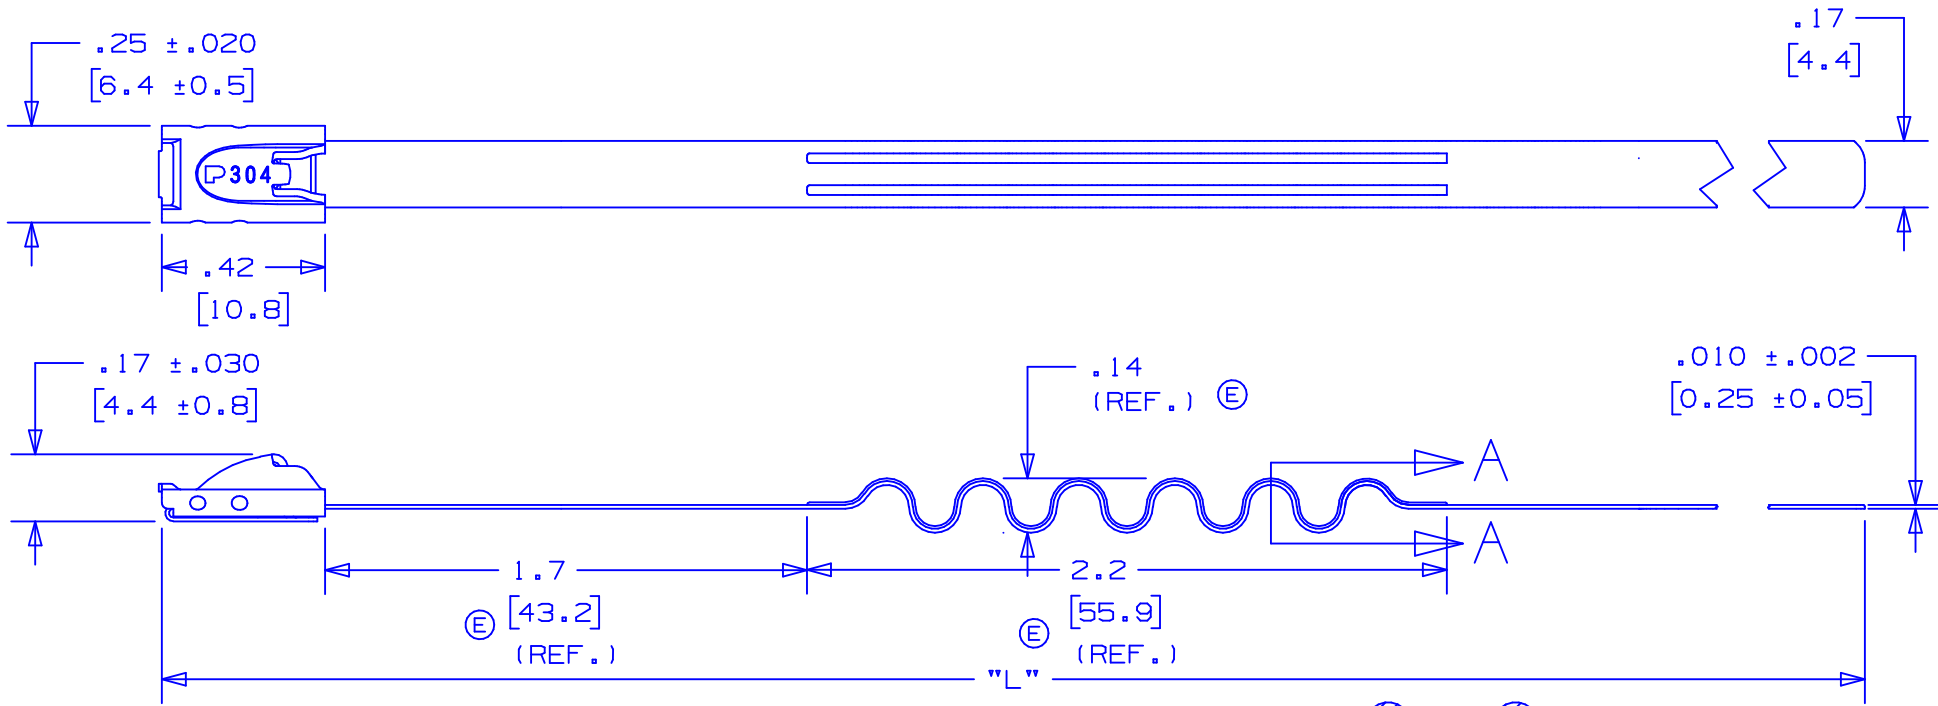

(D) FULLY ROUNDED EDGES ALONG STRAP BODY



S41124\_03

|     |       |      |     |   |       |     |      |
|-----|-------|------|-----|---|-------|-----|------|
| 03  | 8/04  | JAMB |     | (D) REMOVED "AISI NO.1 FULL RADIUSED" & REPLACED WITH "FULLY ROUNDED" (D) ADDED "REF" TO DIM'S. | 11907 |     |      |
| 02  | 10/03 | BRH  | DPN | (C) ADDED ST3MT TO APPLICATION TOOLS NOTE   | 11162 | CCH | JJB  |
| 01  | 6/03  | JAMB | DPN | (A) TOL. WAS .2 [5] (B) LGTH. [MM] WAS [681]  | 10568 | CCH | JJB  |
| 00  | 4/03  | JAMB | DPN | RELEASED  | 10563 | CCH | JJB  |
| REV | DATE  | BY   | CHK | DESCRIPTION   | ECN # | PM  | CUST |

**PANDUIT** CORP.

TINLEY PARK, ILLINOIS

WAVE-TY  
STANDARD SERIES- 304 STAINLESS STEEL

|          |       |       |             |
|----------|-------|-------|-------------|
| DRAWN BY | CHK'D | SCALE | DRAWING NO. |
| JAMB     | DPN   | 2x    | S41124      |